

MECHANICAL DATA


Dimensions in mm

P-CHANNEL POWER MOSFET

POWER MOSFETS FOR AUDIO APPLICATIONS

FEATURES

- **HIGH SPEED SWITCHING**
- **P-CHANNEL POWER MOSFET**
- **SEMEFAB DESIGNED AND DIFFUSED**
- **HIGH VOLTAGE (160V & 200V)**
- **HIGH ENERGY RATING**
- **ENHANCEMENT MODE**
- **INTEGRAL PROTECTION DIODE**
- **N-CHANNEL ALSO AVAILABLE AS BUZ900D & BUZ901D**
- **DOUBLE DIE PACKAGE FOR MAXIMUM POWER AND HEATSINK SPACE**

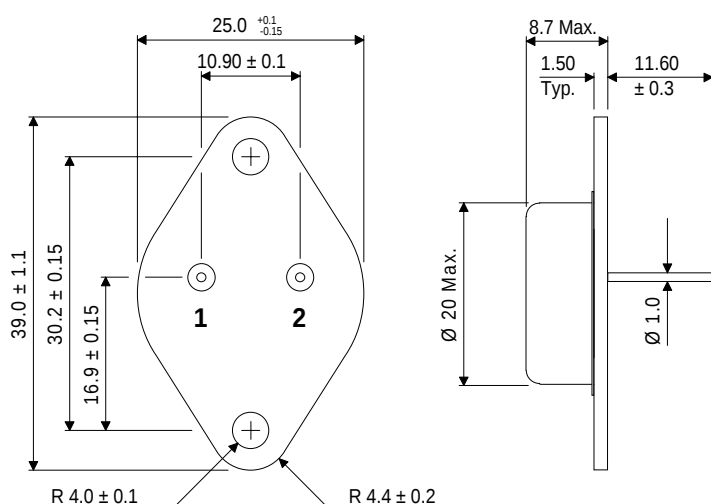

TO-3

Pin 1 – Gate

Pin 2 – Drain

Case – Source

ABSOLUTE MAXIMUM RATINGS

($T_{\text{case}} = 25^{\circ}\text{C}$ unless otherwise stated)

(T _{case} = 25°C unless otherwise stated)		BUZ905D	BUZ906D
V _{DSX}	Drain – Source Voltage	-160V	-200V
V _{GSS}	Gate – Source Voltage	±14V	
I _D	Continuous Drain Current	-16A	
I _{D(PK)}	Body Drain Diode	-16A	
P _D	Total Power Dissipation @ T _{case} = 25°C	250W	
T _{stg}	Storage Temperature Range	–55 to 150°C	
T _j	Maximum Operating Junction Temperature	150°C	
R _{θJC}	Thermal Resistance Junction – Case	0.5°C/W	

STATIC CHARACTERISTICS (T_{case} = 25°C unless otherwise stated)

Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
BV _{DSX} Drain – Source Breakdown Voltage	V _{GS} = 10V	BUZ905D	-160		V
	I _D = -10mA	BUZ906D	-200		
BV _{GSS} Gate – Source Breakdown Voltage	V _{DS} = 0	I _G = ±100μA	±14		V
V _{GS(OFF)} Gate – Source Cut-Off Voltage	V _{DS} = -10V	I _D = -100mA	-0.1		V
V _{DS(SAT)*} Drain – Source Saturation Voltage	V _{GD} = 0	I _D = -16A		-12	V
I _{DSX} Drain – Source Cut-Off Current	V _{GS} = 10V	V _{DS} = -160V BUZ905D		-10	mA
		V _{DS} = -200V BUZ906D		-10	
yfs* Forward Transfer Admittance	V _{DS} = -10V	I _D = -3A	1.4		S

DYNAMIC CHARACTERISTICS (T_{case} = 25°C unless otherwise stated)

Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
C _{iss} Input Capacitance	V _{DS} = 10V f = 1MHz		1900		pF
C _{oss} Output Capacitance			900		
C _{rss} Reverse Transfer Capacitance			60		
t _{on} Turn-on Time	V _{DS} = 20V		150		ns
t _{off} Turn-off Time	I _D = 7A		110		

* Pulse Test: Pulse Width = 300μs , Duty Cycle ≤ 2%.

