


CGRC301 Thru CGRC307

Glass Passivated Type

Reverse Voltage: 50 - 1000 Volts

Forward Current: 2.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- High surge current capability

Mechanical data

- Case: JEDEC DO-214AB molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.21 gram

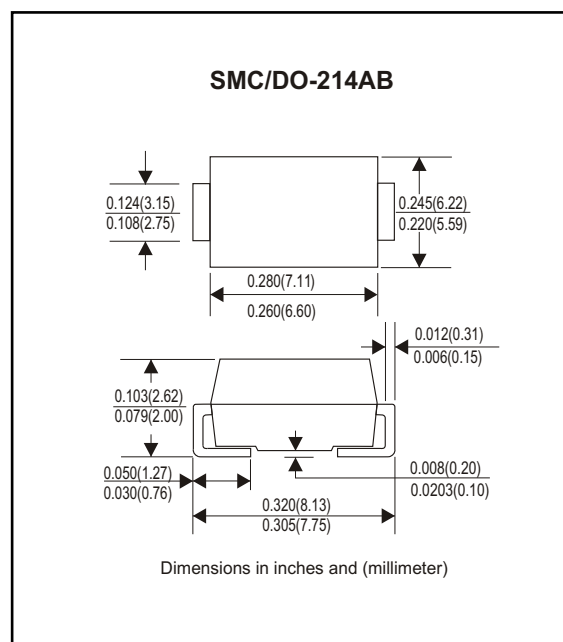

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CGRC 301	CGRC 302	CGRC 303	CGRC 304	CGRC 305	CGRC 306	CGRC 307	Unit
Max. Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Max. DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Max. RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rate load (JEDEC method)	I_{FSM}	100							A
Max. Average Forward Current	I_o	3.0							A
Max. Instantaneous Forward Current at 3.0 A	V_F	1.1							V
Max. DC Reverse Current at Rated DC Blocking Voltage $T_a=25^{\circ}C$ $T_a=100^{\circ}C$	I_R	5 50							μA
Max. Thermal Resistance(Note 1)	$R_{\theta JA}$	50							$^{\circ}C/W$
Operating Junction Temperature	T_j	-55 to +150							$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150							$^{\circ}C$

Note 1: Thermal resistance from junction to ambient.

Rating and Characteristic Curves (CGRC301 Thru CGRC307)

Fig. 1 - Reverse Characteristics

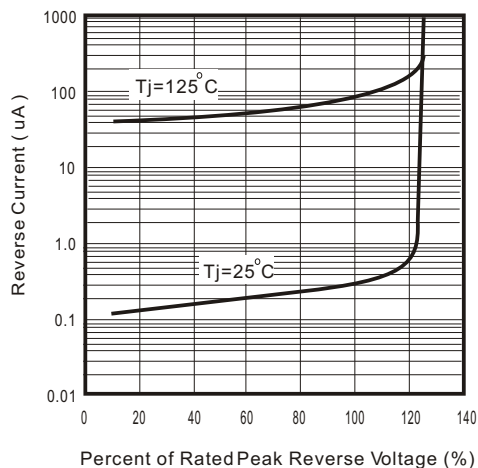


Fig.2 - Forward Characteristics

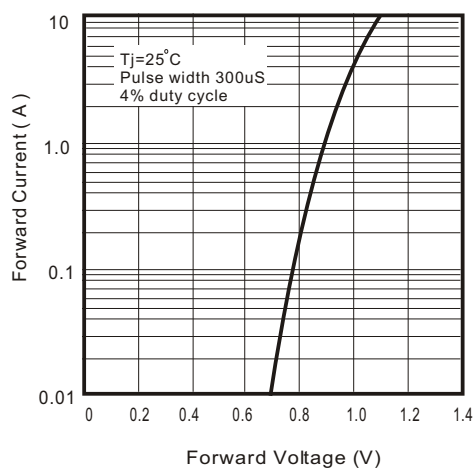


Fig. 3 - Jundion Capacitance

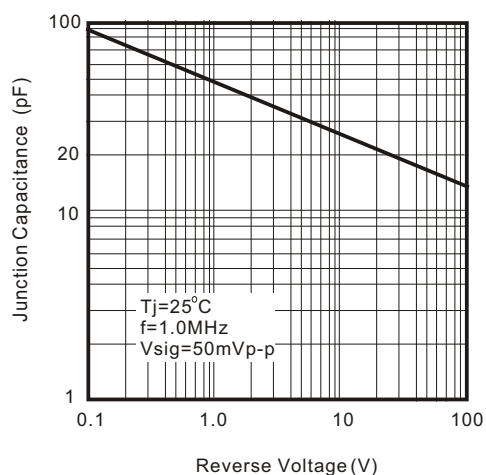


Fig. 4 - Current Derating Curve

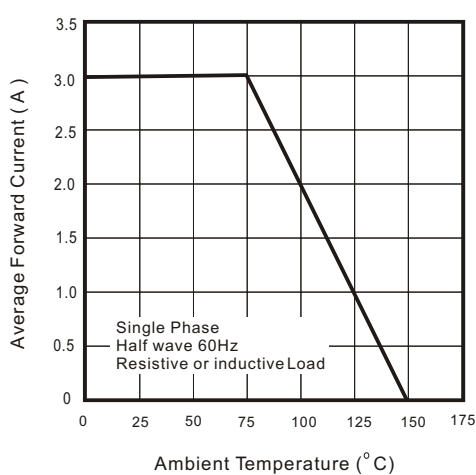


Fig. 5 - Non Repetitive Forward Surge Current

