

BLINKING LED LAMPS(ROUND TYPES)

FEATURES

- Standard T1 3 ϕ
- 1/4 Duty Cycle
- Pulse Rate : 2.4Hz (VDD=5V)
- Operating Voltage : 3V~10V (DC)
- Easily be driven by TTL & C-MOS circuit no external circuit needed

ABSOLUTE MAXIMUM RATINGS

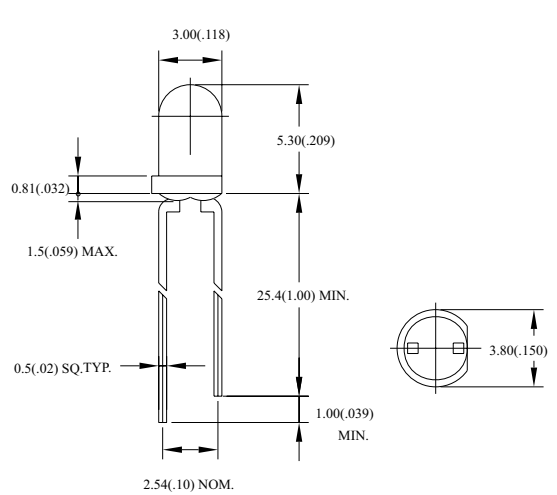
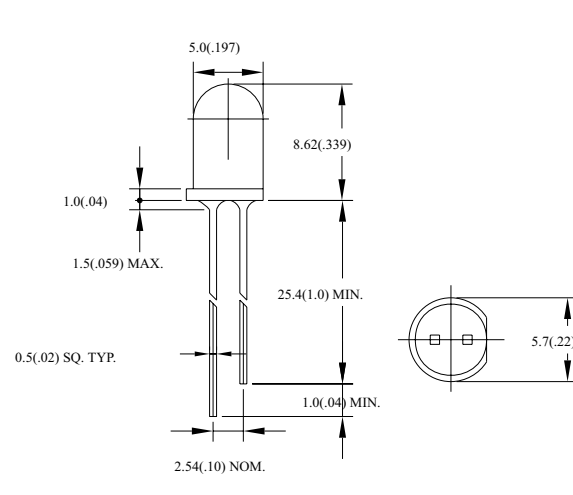
- Operating Temperature Range -20°C~80°C
- Storage Temperature Range -20°C~85°C
- Operating Voltage(Max) 10 Volt
- Reverse Voltage(Max) -5 Volt

Package	Part No.	Chip			Lens Appearance	Pulse Rate(Hz) VDD=5V (Hz)			Luminous Intensity IF=25mA (mcd)		Viewing Angle 2 θ 1/2 (deg)	Drawing No.				
		Material	Emitted Color	Peak Wave Length λ_p (nm)		Min.	Typ.	Max.	Min.	Typ.						
T-1 Standard 1.0" Lead 3 ϕ	BB-B5171-C	GaP/GaP	Bright Red	700	Red Diffused	2.0	2.4	2.8	2.0	6.0	45	L-152				
	BB-B4571-C	GaAsP/GaP	Hi-Eff Red	635					8.0	25.0						
	BB-B6171-C	GaAlAs	Super Red	660					15.0	40.0						
	BB-B2171-C	GaP/GaP	Green	568	Green Diffused				8.0	25.0						
	BB-BX1171-C	GaP/GaP	Hi-Eff Y.G	568					10.0	30.0						
	BB-B3171-C	GaAsP/GaP	Yellow	585					Yellow Diffused	6.0			20.0			
	BB-B4171-C	GaAsP/GaP	Orange	635	Orange Diffused				8.0	25.0						
T-13/4 Standard 1.0" Lead 5 ϕ	BB-B5174	GaP/GaP	Bright Red	700	Red Diffused				4.0	12.0	20.0	60.0	45	L-153		
	BB-B4574	GaAsP/GaP	Hi-Eff Red	635											12.0	40.0
	BB-B6174	GaAlAs	Super Red	660											20.0	60.0
	BB-B2174	GaP/GaP	Green	568	Green Diffused										12.0	40.0
	BB-BX1174	GaP/GaP	Hi-Eff Y.G	568											5.0	50.0
	BB-B3174	GaAsP/GaP	Yellow	585											Yellow Diffused	10.0
	BB-B4174	GaAsP/GaP	Orange	635	Orange Diffused										12.0	40.0

Remark : 1.Hi-Eff Red / High-Efficiency Red °

2.Trans / Transparent °

3.2 θ 1/2 The off-axis angle at which the luminous intensity is half the axial luminous intensity °

L-152	BB-Bxx71-C Series	L-153	BB-Bxx74 Series
			

Notes : 1.All Dimensions are millimeters (inches).

2.Tolerance is $\pm 0.25\text{mm} (.010")$.

Yellow Stone corp.

www.ystone.com.tw

886-2-28221522 FAX:886-2-28202309

YELLOW STONE CORP. Specifications subject to change without notice.