


# BLOCK DIAGRAM—ÉLANSC410 MICROCONTROLLER

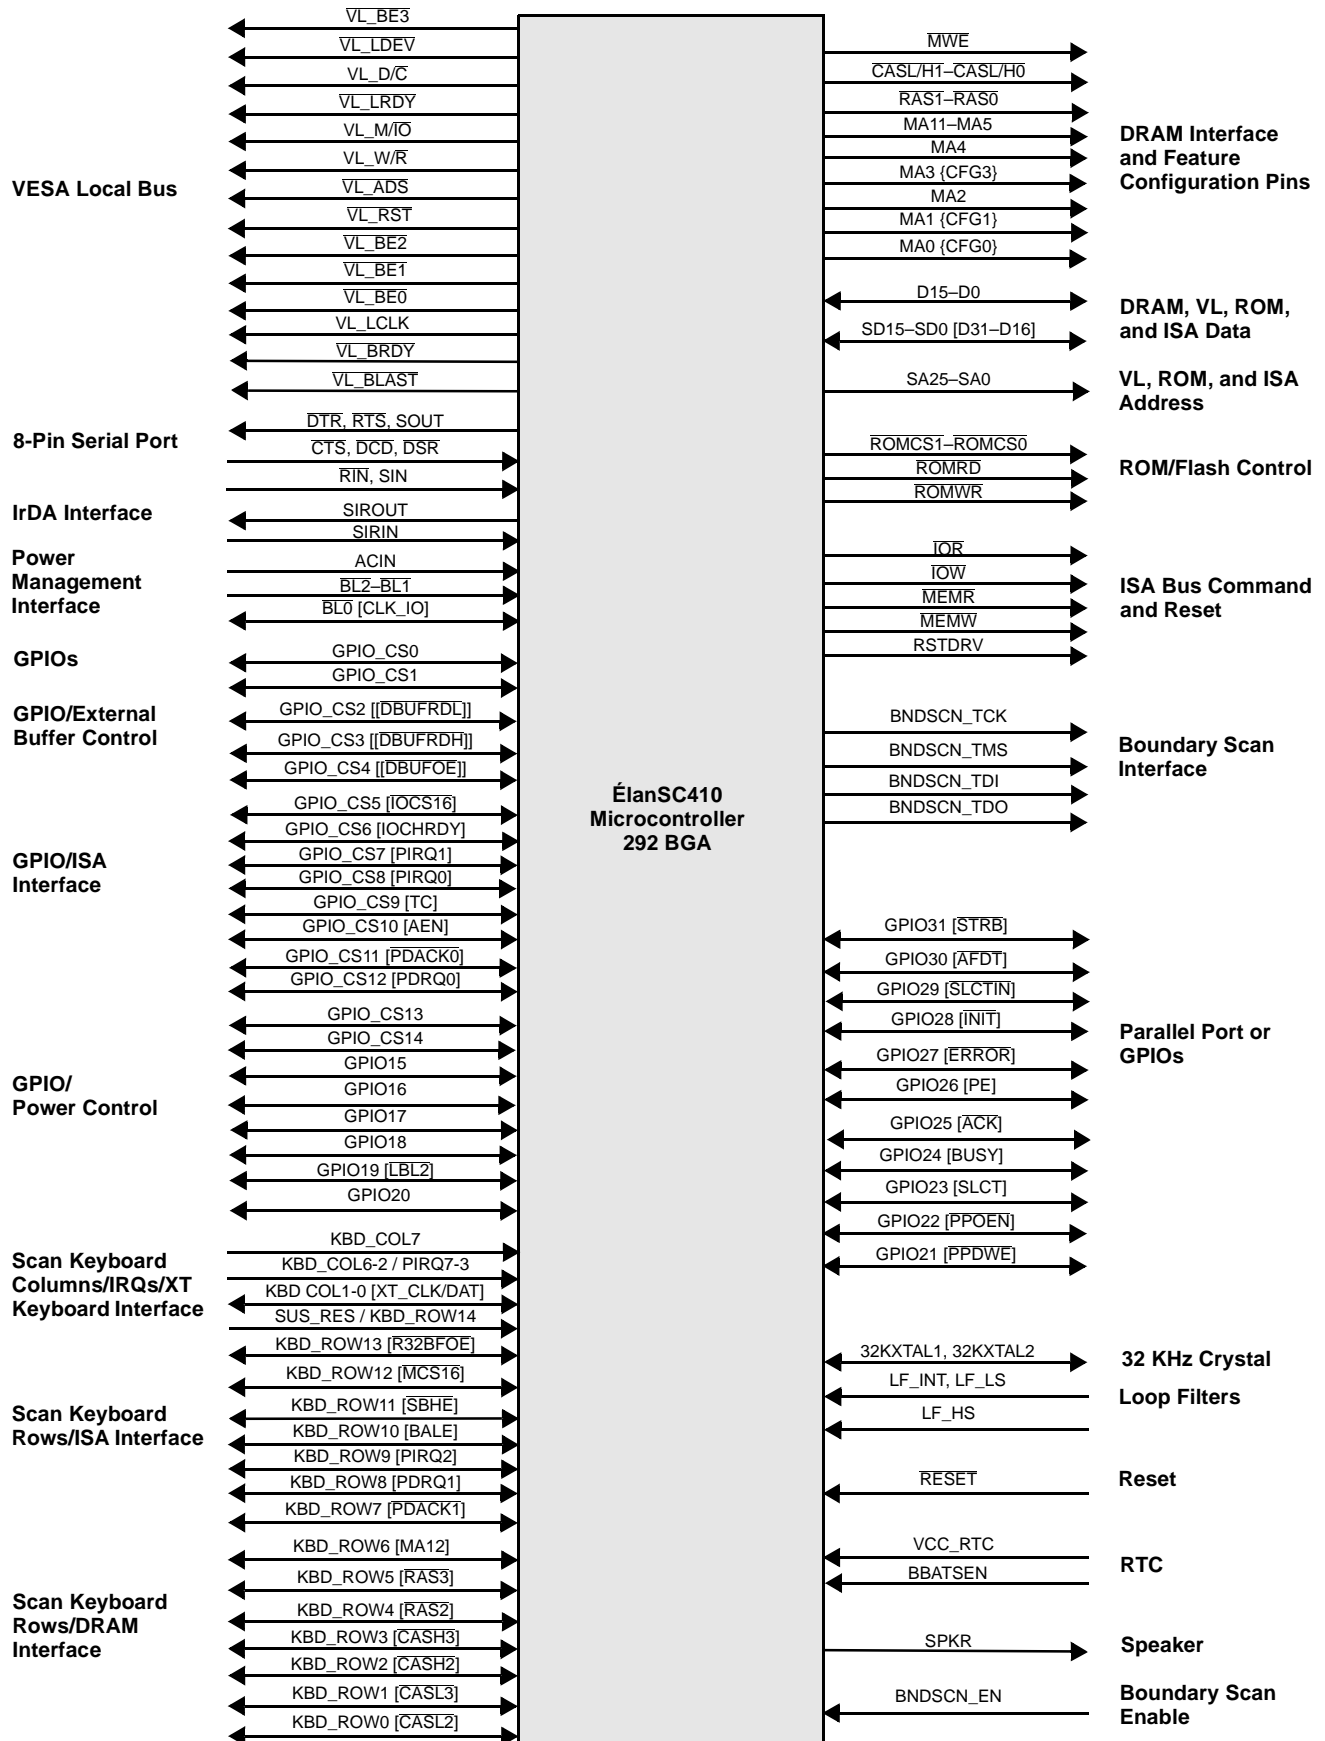

**Note:** / = Two functions available on the pin at the same time. { } = Function during hardware reset. [ ] = Alternative function selected by firmware configuration. [[ ]] = Alternate function selected by a hardware configuration pin state at power-on reset.