

**HEXFET® POWER MOSFET
SURFACE MOUNT (SMD-0.5)**


**IRF5NJ9540
100V, P-CHANNEL**

Product Summary

Part Number	BV _{DSS}	R _{DS(on)}	I _D
IRF5NJ9540	-100V	0.117Ω	-18A

Fifth Generation HEXFET® power MOSFETs from International Rectifier utilize advanced processing techniques to achieve the lowest possible on-resistance per silicon unit area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET power MOSFETs are well known for, provides the designer with an extremely efficient device for use in a wide variety of applications.

These devices are well-suited for applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers and high-energy pulse circuits.



SMD-0.5

Features:

- Low R_{DS(on)}
- Avalanche Energy Ratings
- Dynamic dv/dt Rating
- Simple Drive Requirements
- Ease of Paralleling
- Hermetically Sealed
- Surface Mount
- Light Weight

Absolute Maximum Ratings

	Parameter		Units
I _D @ V _{GS} = -10V, T _C = 25°C	Continuous Drain Current	-18	A
I _D @ V _{GS} = -10V, T _C = 100°C	Continuous Drain Current	-11	
I _{DM}	Pulsed Drain Current ①	-72	
P _D @ T _C = 25°C	Max. Power Dissipation	75	W
	Linear Derating Factor	0.6	W/°C
V _{GS}	Gate-to-Source Voltage	±20	V
E _{AS}	Single Pulse Avalanche Energy ②	260	mJ
I _{AR}	Avalanche Current ①	-11	A
E _{AR}	Repetitive Avalanche Energy ①	7.5	mJ
dv/dt	Peak Diode Recovery dv/dt ③	4.1	V/ns
T _J	Operating Junction	-55 to 150	°C
T _{STG}	Storage Temperature Range		
	Package Mounting Surface Temperature	300 (for 5 s)	
	Weight	1.0 (Typical)	g

For footnotes refer to the last page

Electrical Characteristics @ T_j = 25°C (Unless Otherwise Specified)

	Parameter	Min	Typ	Max	Units	Test Conditions
BV _{DSS}	Drain-to-Source Breakdown Voltage	-100	—	—	V	V _{GS} = 0V, I _D = -250μA
ΔBV _{DSS} /ΔT _j	Temperature Coefficient of Breakdown Voltage	—	-0.104	—	V/°C	Reference to 25°C, I _D = -1.0mA
R _{DS(on)}	Static Drain-to-Source On-State Resistance	—	—	0.117	Ω	V _{GS} = 10V, I _D = -11A ④
V _{GS(th)}	Gate Threshold Voltage	-2.0	—	-4.0	V	V _{DS} = V _{GS} , I _D = -250μA
g _{fs}	Forward Transconductance	5.0	—	—	S (r)	V _{DS} = -50V, I _{DS} = -11A ④
I _{DSS}	Zero Gate Voltage Drain Current	—	—	-25	μA	V _{DS} = -100V, V _{GS} = 0V
		—	—	-250		V _{DS} = -80V, V _{GS} = 0V, T _j = 125°C
I _{GSS}	Gate-to-Source Leakage Forward	—	—	-100	nA	V _{GS} = -20V
I _{GSS}	Gate-to-Source Leakage Reverse	—	—	100		V _{GS} = 20V
Q _g	Total Gate Charge	—	—	109	nC	V _{GS} = -10V, I _D = -11A V _{DS} = -80V
Q _{gs}	Gate-to-Source Charge	—	—	19		
Q _{gd}	Gate-to-Drain ('Miller') Charge	—	—	53		
t _{d(on)}	Turn-On Delay Time	—	—	29	ns	V _{DD} = -50V, I _D = -11A, V _{GS} = -10V, R _G = 5.1Ω
t _r	Rise Time	—	—	135		
t _{d(off)}	Turn-Off Delay Time	—	—	87		
t _f	Fall Time	—	—	84		
L _S + L _D	Total Inductance	—	4.0	—	nH	Measured from the center of drain pad to center of source pad
C _{iss}	Input Capacitance	—	1340	—	pF	V _{GS} = 0V, V _{DS} = -25V f = 1.0MHz
C _{oss}	Output Capacitance	—	428	—		
C _{rss}	Reverse Transfer Capacitance	—	246	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min	Typ	Max	Units	Test Conditions
I _S	Continuous Source Current (Body Diode)	—	—	-18	A	T _j = 25°C, I _S = -11A, V _{GS} = 0V ④
I _{SM}	Pulse Source Current (Body Diode) ①	—	—	-72		
V _{SD}	Diode Forward Voltage	—	—	-1.6	V	T _j = 25°C, I _F = -11A, di/dt ≤ -100A/μs V _{DD} ≤ -50V ④
t _{rr}	Reverse Recovery Time	—	—	220	ns	
Q _{RR}	Reverse Recovery Charge	—	—	1200	nC	
t _{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L _S + L _D .				

Thermal Resistance

	Parameter	Min	Typ	Max	Units	Test Conditions
R _{thJC}	Junction-to-Case	—	—	1.67	°C/W	

Note: Corresponding Spice and Saber models are available on the G&S Website.

For footnotes refer to the last page

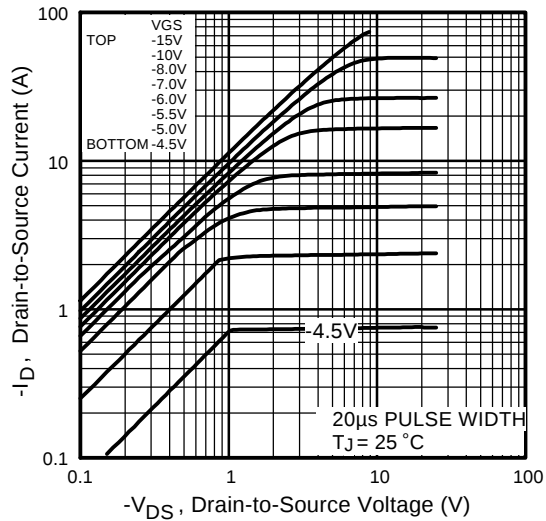


Fig 1. Typical Output Characteristics

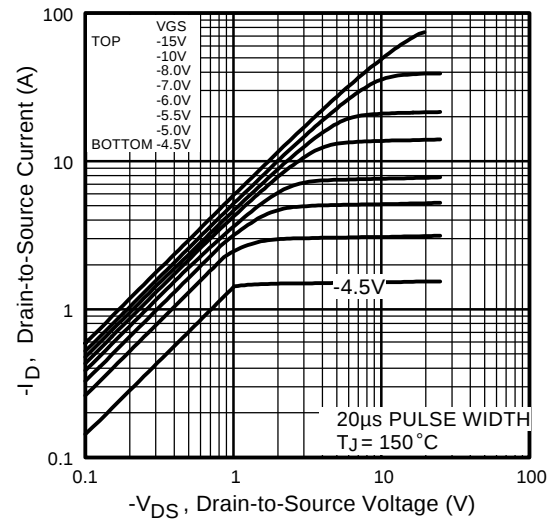


Fig 2. Typical Output Characteristics

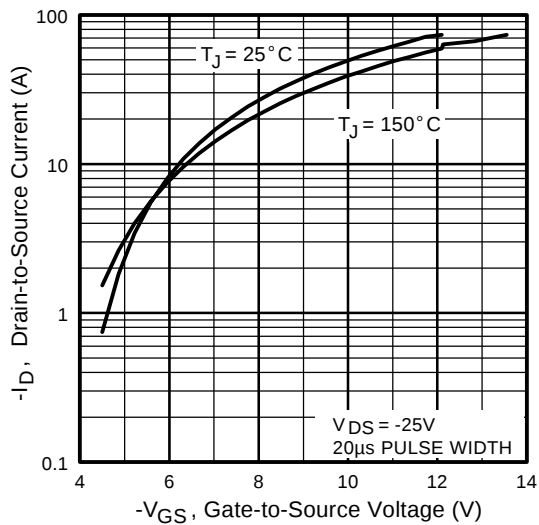


Fig 3. Typical Transfer Characteristics

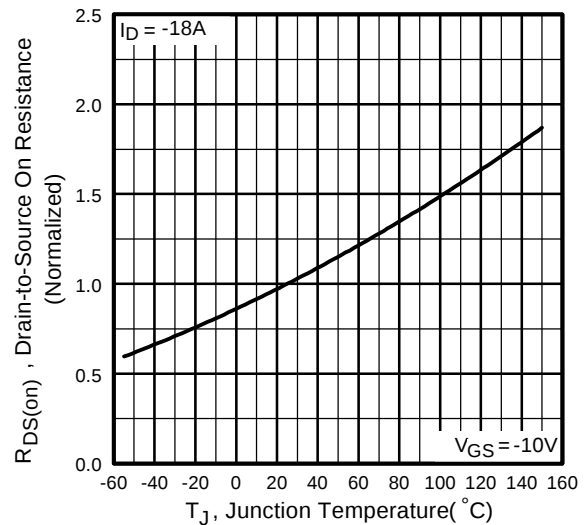


Fig 4. Normalized On-Resistance
Vs. Temperature

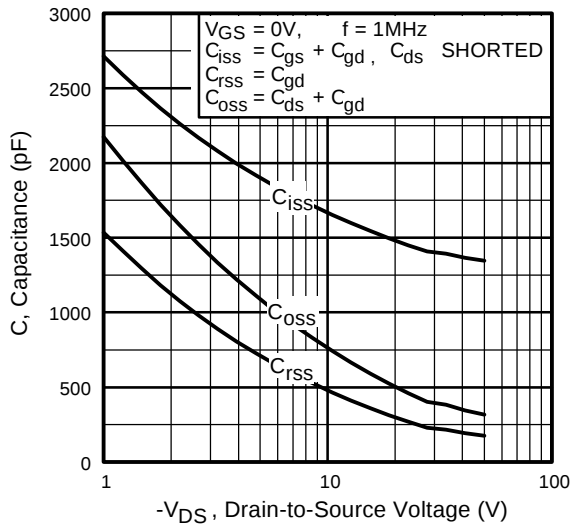


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

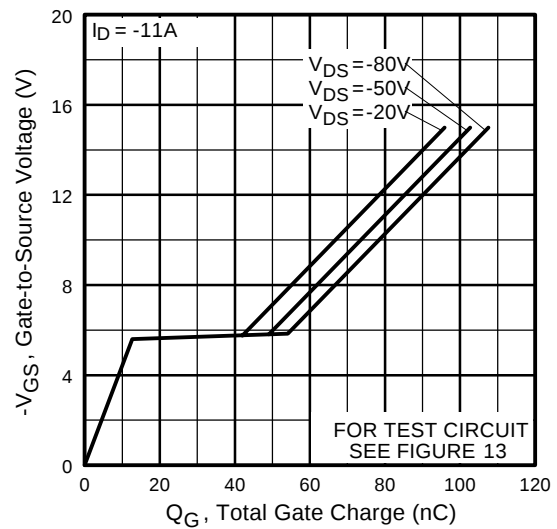


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

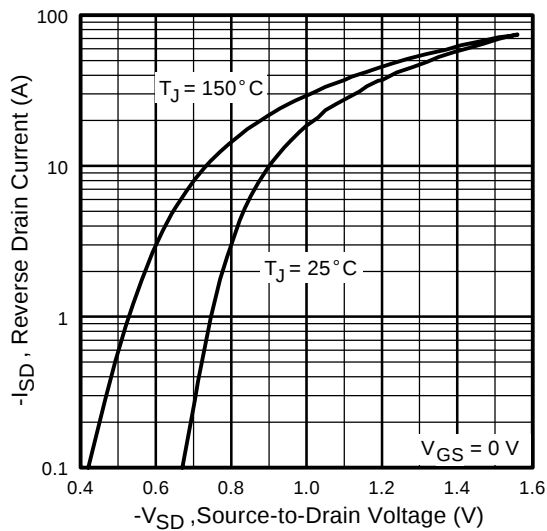


Fig 7. Typical Source-Drain Diode Forward Voltage

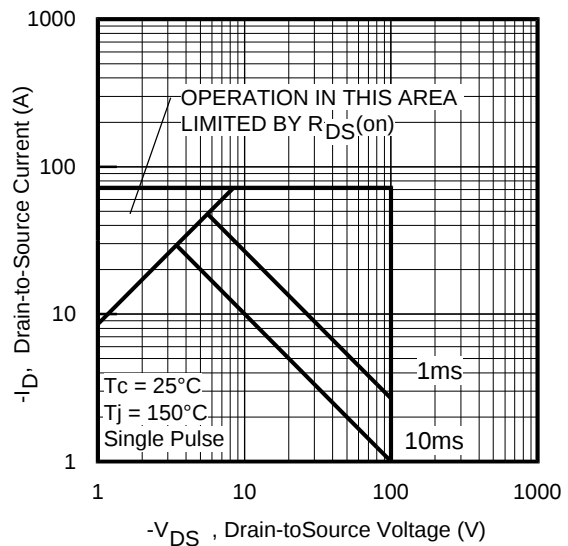


Fig 8. Maximum Safe Operating Area

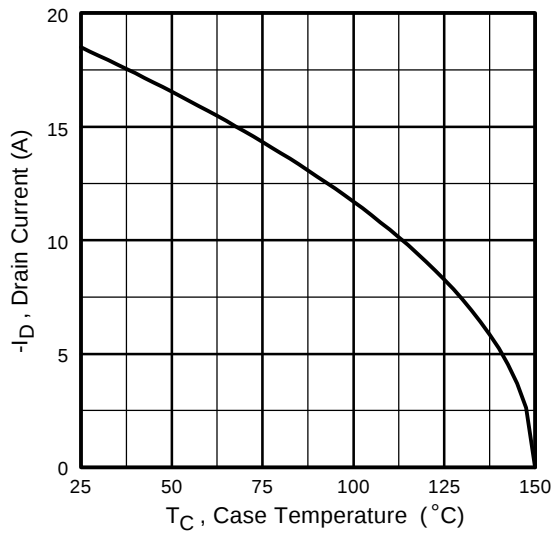


Fig 9. Maximum Drain Current Vs. Case Temperature

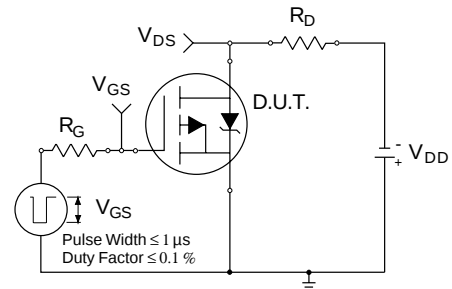


Fig 10a. Switching Time Test Circuit

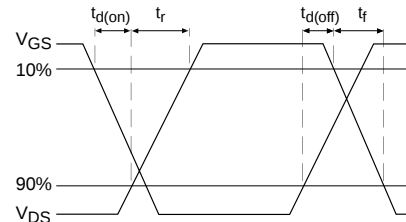


Fig 10b. Switching Time Waveforms

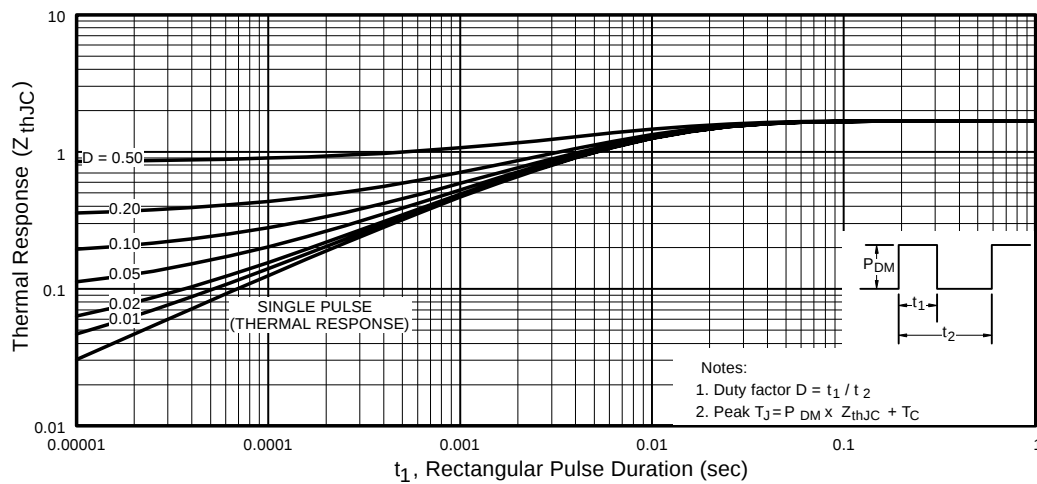


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

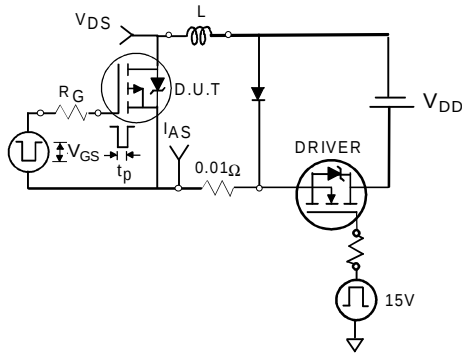


Fig 12a. Unclamped Inductive Test Circuit

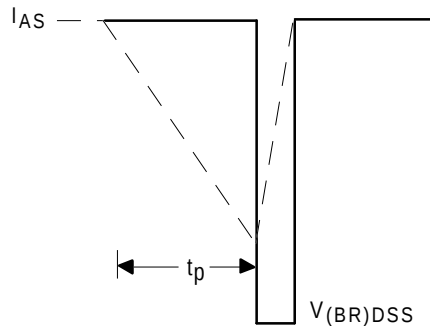


Fig 12b. Unclamped Inductive Waveforms

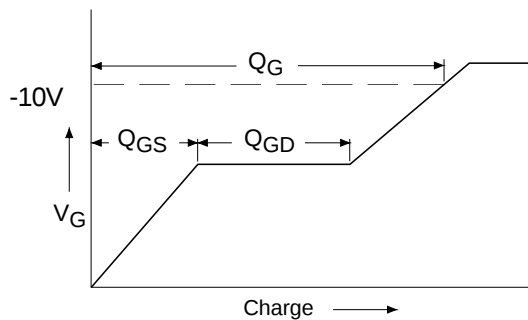


Fig 13a. Basic Gate Charge Waveform

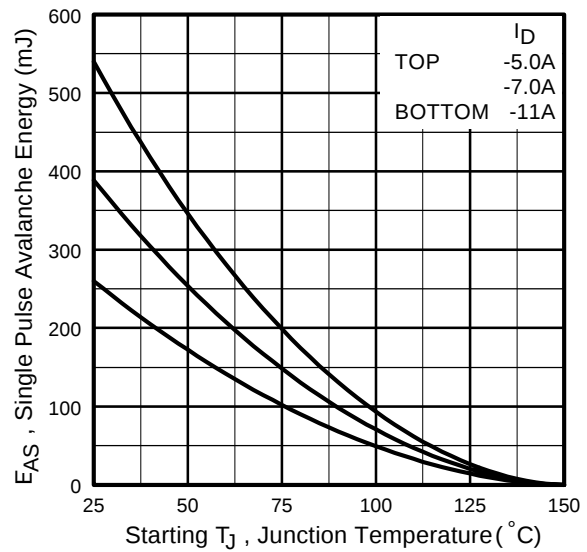


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

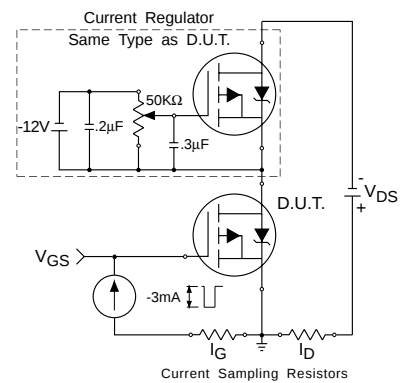


Fig 13b. Gate Charge Test Circuit

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② $V_{DD} = -25\text{ V}$, Starting $T_J = 25^\circ\text{C}$, $L = 4.3\text{mH}$
Peak $I_{AS} = -11\text{A}$, $V_{GS} = -10\text{ V}$, $R_G = 25\Omega$

- ③ $I_{SD} \leq -11A$, $di/dt \leq -360 A/\mu s$,
 $V_{DD} \leq -100V$, $T_J \leq 150^\circ C$
 ④ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$

Technical drawing of a mechanical part, showing three views: Front View, Side View, and Top View. The drawing includes dimensions in inches and millimeters, feature callouts, and surface finish symbols.

Front View Dimensions:

- Overall Width: 7.64 [.301] (Top), 7.40 [.291] (Bottom)
- Overall Height: 10.28 [.405] (Top), 10.04 [.395] (Bottom)
- Top Surface Finish: 0.102 [.004] (3 SURFACES MAX.)
- Top Surface Callout: Φ 0.254 [.010] @ C A
- Top Surface Feature: 7.39 [.291] (Top), 7.14 [.281] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C A
- Top Surface Feature Feature: 5.84 [.230] (Top), 5.59 [.220] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C B
- Top Surface Feature Feature: 3.17 [.125] (Top), 2.93 [.115] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C B
- Top Surface Feature Feature: 2.54 [.100] (Top), 2.29 [.090] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C A

Side View Dimensions:

- Overall Width: 3.12 [.123] MAX.
- Overall Height: 5.52 [.218]
- Side Surface Callout: 1.65 [.065]
- Side Surface Feature: 1.91 [.075]
- Side Surface Feature Callout: 3.81 [.150]

Top View Dimensions:

- Overall Width: 7.64 [.301] (Top), 7.40 [.291] (Bottom)
- Overall Height: 10.28 [.405] (Top), 10.04 [.395] (Bottom)
- Top Surface Finish: 0.102 [.004] (3 SURFACES MAX.)
- Top Surface Callout: Φ 0.254 [.010] @ C A
- Top Surface Feature: 7.39 [.291] (Top), 7.14 [.281] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C A
- Top Surface Feature Feature: 5.84 [.230] (Top), 5.59 [.220] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C B
- Top Surface Feature Feature: 3.17 [.125] (Top), 2.93 [.115] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C B
- Top Surface Feature Feature: 2.54 [.100] (Top), 2.29 [.090] (Bottom)
- Top Surface Feature Callout: Φ 0.254 [.010] @ C A

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. DIMENSION INCLUDES METALLIZATION FLASH.
5. DIMENSION DOES NOT INCLUDE METALLIZATION FLASH.

1 = DRAIN
2 = GATE
3 = SOURCE