


SD101A THRU SD101C

Schottky Diodes


DO-35

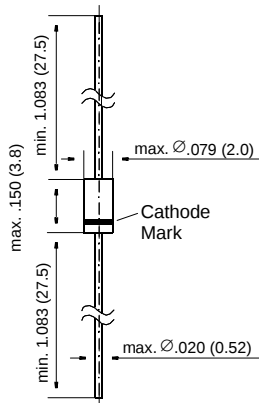

Dimensions in inches and (millimeters)

FEATURES

- ◆ For general purpose applications.
- ◆ The LL101 series is a metal-on-silicon Schottky barrier device which is protected by a PN junction guard ring. The low forward voltage drop and fast switching make it ideal for protection of MOS devices, steering, biasing, and coupling diodes for fast switching and low logic level applications.
- ◆ These diodes are also available in the SOD-123 case with type designations SD101AW thru SD101CW and in the MiniMELF case with type designations LL101A thru LL101C.



MECHANICAL DATA

Case: DO-35 Glass Case

Weight: approx. 0.13 g

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Peak Inverse Voltage	SD101A SD101B SD101C	V_{RRM} V_{RRM} V_{RRM}	V V V
Power Dissipation (Infinite Heat Sink)	P_{tot}	400 ^{1) 2)}	mW
Max. Single Cycle Surge 10 μ s Square Wave	I_{FSM}	2	A
Junction Temperature	T_j	125 ¹⁾	°C
Storage Temperature Range	T_S	-55 to +150 ¹⁾	°C

¹⁾ Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

SD101A THRU SD101C


ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified


		Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 10 \mu A$	SD101A SD101B SD101C	$V_{(BR)R}$ $V_{(BR)R}$ $V_{(BR)R}$	60 50 40	— — —	— — —	V V V
Leakage Current at $V_R = 50 V$ at $V_R = 40 V$ at $V_R = 30 V$	SD101A SD101B SD101C	I_R I_R I_R	— — —	— — —	200 200 200	nA nA nA
Forward Voltage Drop at $I_F = 1 mA$	SD101A SD101B SD101C	V_F V_F V_F	— — —	— — —	0.41 0.4 0.39	V V V
at $I_F = 15 mA$	SD101A SD101B SD101C	V_F V_F V_F	— — —	— — —	1 0.95 0.9	V V V
Junction Capacitance at $V_R = 0 V$, $f = 1 MHz$	SD101A SD101B SD101C	C_{tot} C_{tot} C_{tot}	— — —	— — —	2.0 2.1 2.2	pF pF pF
Reverse Recovery Time at $I_F = I_R = 5 mA$, recover to $0.1 I_R$		t_{rr}	—	—	1	ns
Thermal Resistance, Junction to Ambient Air		R_{thJA}	—	—	0.3 ¹⁾	K/mW
¹⁾ Valid provided that leads at a distance of 4 mm from case are kept ambient temperature						

RATINGS AND CHARACTERISTIC CURVES SD101A THRU SD101C


Typical variation of fwd. current vs. fwd. voltage for primary conduction through the Schottky barrier

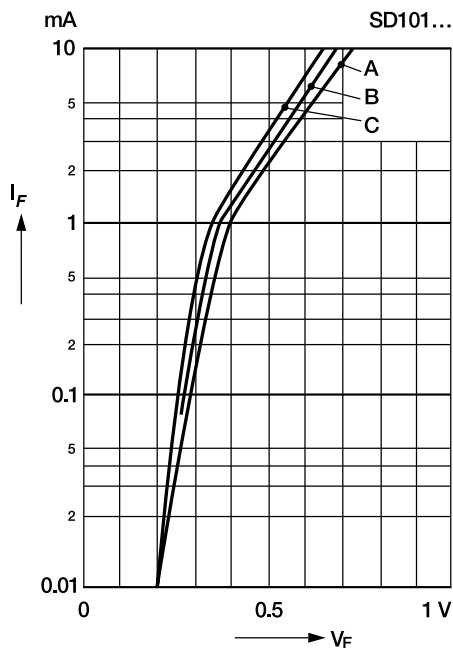

Typical forward conduction curve of combination Schottky barrier and PN junction guard ring

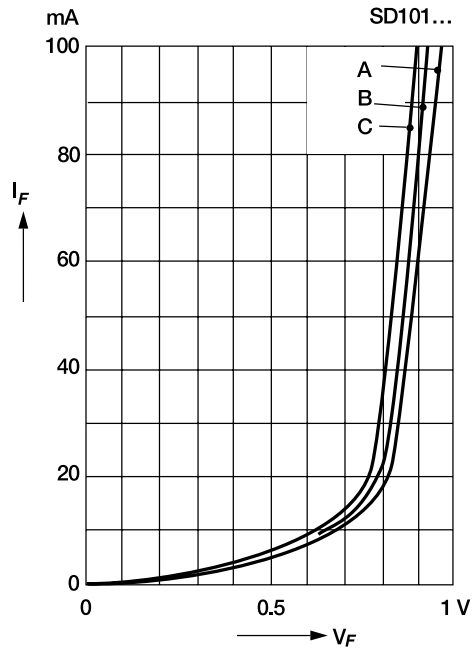

Typical variation of reverse current at various temperatures

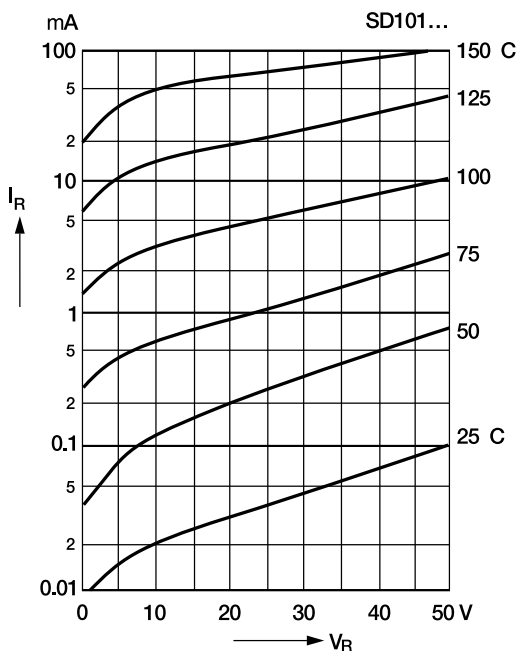

Typical capacitance curve as a function of reverse voltage

