


MC79L00 SERIES NEGATIVE-VOLTAGE REGULATORS

SLVS011B – OCTOBER 1982 – REVISED FEBRUARY 2000

- 3-Terminal Regulators
- Output Current Up to 100 mA
- No External Components Required
- Internal Thermal-Overload Protection
- Internal Short-Circuit Current Limiting
- Direct Replacement for Motorola MC79L00 Series
- Available in 5% or 10% Selections

**D PACKAGE
(TOP VIEW)**

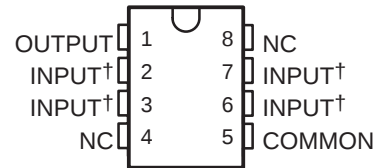

† Internally connected
NC—No internal connection

description

This series of fixed negative-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used to control series pass elements to make high-current voltage-regulator circuits. One of these regulators can deliver up to 100 mA of output current. The internal current-limiting and thermal-shutdown features make them essentially immune to overload. When used as a replacement for a zener-diode and resistor combination, these devices can provide an effective improvement in output impedance of two orders of magnitude, with lower bias current.

The MC79L00C series is characterized for operation over the virtual junction temperature range of 0°C to 125°C.

**LP PACKAGE
(TOP VIEW)**



AVAILABLE OPTIONS

T _J	NOMINAL OUTPUT VOLTAGE (V)	PACKAGED DEVICES			
		OUTPUT VOLTAGE TOLERANCE			
		SMALL OUTLINE (D)		PLASTIC CYLINDRICAL (LP)	
		5%	10%	5%	10%
0°C to 125°C	–5	MC79L05ACD [‡]	–	MC79L05ACL [‡]	–
	–12	MC79L12ACD [‡]	MC79L12CD	MC79L12ACL [‡]	MC79L12CLP
	–15	MC79L15ACD	MC79L15CD	MC79L15ACL [§]	–


[‡] This device is available taped and reeled. Add the suffix R to the device type (e.g., MC79L05ACDR).

[§] This device is available taped and reeled or in ammo pack. Add the suffix M to the device type for ammo pack (e.g., MC79L15ACLPM).

MC79L00 SERIES
NEGATIVE-VOLTAGE REGULATORS

SLVS011B – OCTOBER 1982 – REVISED FEBRUARY 2000

equivalent schematic

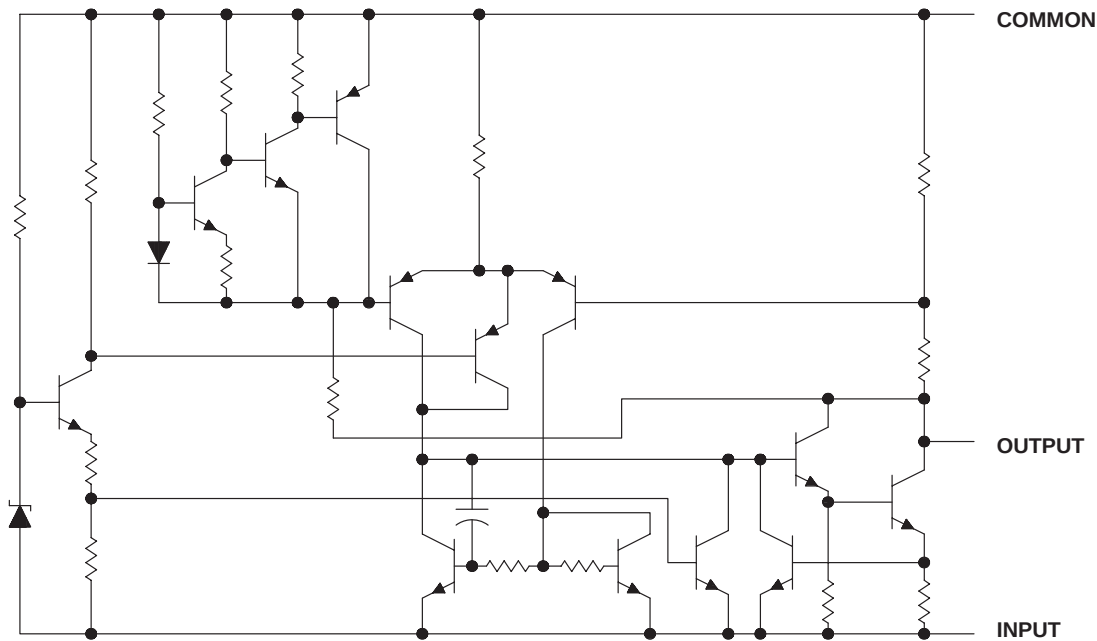

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Input voltage: MC79L05	–30 V
MC79L12, MC79L15	–35 V
Operating free-air, case, or virtual junction temperature	150°C
Package thermal impedance, θ_{JA} (see Notes 1 and 2): D package	97°C/W
LP package	196°C/W
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. Maximum power dissipation is a function of $T_J(\text{max})$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(\text{max}) - T_A) / \theta_{JA}$. Operating at the absolute maximum T_J of 150°C can impact reliability.
2. The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions

		MIN	MAX	UNIT
Input voltage, V_I	MC79L05	–7	–20	V
	MC79L12	–14.5	–27	
	MC79L15	–17.5	–30	
Output current, I_O			100	mA
Operating virtual junction temperature, T_J		0	125	°C

MC79L00 SERIES NEGATIVE-VOLTAGE REGULATORS

SLVS011B – OCTOBER 1982 – REVISED FEBRUARY 2000

electrical characteristics at specified virtual junction temperature, $V_I = -10\text{ V}$, $I_O = 40\text{ mA}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	T_J	MC79L05C			MC79L05AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Output voltage [‡]		25°C	-4.6	-5	-5.4	-4.8	-5	-5.2	V
	$V_I = -7\text{ V to } -20\text{ V}$, $I_O = 1\text{ mA to } 40\text{ mA}$	0°C to 125°C	-4.5		-5.5	-4.75		-5.25	
	$V_I = -10\text{ V}$, $I_O = 1\text{ mA to } 70\text{ mA}$	0°C to 125°C	-4.5		-5.5	-4.75		-5.25	
Input regulation	$V_I = -7\text{ V to } -20\text{ V}$	25°C			200			150	mV
	$V_I = -8\text{ V to } -20\text{ V}$				150			100	
Ripple rejection	$V_I = -8\text{ V to } -18\text{ V}$, $f = 120\text{ Hz}$	25°C	40	49		41	49		dB
Output regulation	$I_O = 1\text{ mA to } 100\text{ mA}$	25°C			60			60	mV
	$I_O = 1\text{ mA to } 40\text{ mA}$				30			30	
Output noise voltage	$f = 10\text{ Hz to } 100\text{ kHz}$	25°C		40			40		μV
Dropout voltage	$I_O = 40\text{ mA}$	25°C		1.7			1.7		V
Bias current		25°C			6			6	mV
		125°C			5.5			5.5	
Bias current change	$V_I = -8\text{ V to } -20\text{ V}$	0°C to 125°C			1.5			1.5	mV
	$I_O = 1\text{ mA to } 40\text{ mA}$				0.2			0.1	

[†] All characteristics are measured with a 0.33-μF capacitor across the input and a 0.1-μF capacitor across the output. Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.

[‡] This specification applies only for dc power dissipation permitted by absolute maximum ratings.

electrical characteristics at specified virtual junction temperature, $V_I = -19\text{ V}$, $I_O = 40\text{ mA}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	T_J	MC79L12C			MC79L12AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Output voltage [‡]		25°C	-11.1	-12	-12.9	-11.5	-12	-12.5	V
	$V_I = -14.5\text{ V to } -27\text{ V}$, $I_O = 1\text{ mA to } 40\text{ mA}$	0°C to 125°C	-10.8		-13.2	-11.4		-12.6	
	$V_I = -19\text{ V}$, $I_O = 1\text{ mA to } 70\text{ mA}$	0°C to 125°C	-10.8		-13.2	-11.4		-12.6	
Input regulation	$V_I = -14.5\text{ V to } -27\text{ V}$	25°C			250			250	mV
	$V_I = -16\text{ V to } -27\text{ V}$				200			200	
Ripple rejection	$V_I = -15\text{ V to } -25\text{ V}$, $f = 120\text{ Hz}$	25°C	36	42		37	42		dB
Output regulation	$I_O = 1\text{ mA to } 100\text{ mA}$	25°C			100			100	mV
	$I_O = 1\text{ mA to } 40\text{ mA}$				50			50	
Output noise voltage	$f = 10\text{ Hz to } 100\text{ kHz}$	25°C		80			80		μV
Dropout voltage	$I_O = 40\text{ mA}$	25°C		1.7			1.7		V
Bias current		25°C			6.5			6.5	mV
		125°C			6			6	
Bias current change	$V_I = -16\text{ V to } -27\text{ V}$	0°C to 125°C			1.5			1.5	mV
	$I_O = 1\text{ mA to } 40\text{ mA}$				0.2			0.1	

[†] All characteristics are measured with a 0.33-μF capacitor across the input and a 0.1-μF capacitor across the output. Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.

[‡] This specification applies only for dc power dissipation permitted by absolute maximum ratings.



MC79L00 SERIES NEGATIVE-VOLTAGE REGULATORS

SLVS011B – OCTOBER 1982 – REVISED FEBRUARY 2000

electrical characteristics at specified virtual junction temperature, $V_I = -23\text{ V}$, $I_O = 40\text{ mA}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	T _J	MC79L15C			MC79L15AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Output voltage [‡]		25°C	-13.8	-15	-16.2	-14.4	-15	-15.6	V
	$V_I = -17.5\text{ V to }-30\text{ V}$, $I_O = 1\text{ mA to }40\text{ mA}$	0°C to 125°C	-13.5		-16.5	-14.25		-15.75	
	$V_I = -23\text{ V}$, $I_O = 1\text{ mA to }70\text{ mA}$	0°C to 125°C	-13.5		-16.5	-14.25		-15.75	
Input regulation	$V_I = -17.5\text{ V to }-30\text{ V}$	25°C			300			300	mV
	$V_I = -17.5\text{ V to }-30\text{ V}$				250			250	
Ripple rejection	$V_I = -18.5\text{ V to }-28.5\text{ V}$, $f = 120\text{ Hz}$	25°C	33	39		34	39		dB
Output regulation	$I_O = 1\text{ mA to }100\text{ mA}$	25°C			150			150	mV
	$I_O = 1\text{ mA to }40\text{ mA}$				75			75	
Output noise voltage	$f = 10\text{ Hz to }100\text{ kHz}$	25°C		90			90		μV
Dropout voltage	$I_O = 40\text{ mA}$	25°C		1.7			1.7		V
Bias current		25°C			6.5			6.5	mV
		125°C			6			6	
Bias current change	$V_I = -20\text{ V to }-30\text{ V}$	0°C to 125°C			1.5			1.5	mV
	$I_O = 1\text{ mA to }40\text{ mA}$				0.2			0.1	

[†] All characteristics are measured with a 0.33-μF capacitor across the input and a 0.1-μF capacitor across the output. Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.

[‡] This specification applies only for dc power dissipation permitted by absolute maximum ratings.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.