



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

**BY133
THRU
EM520**

TECHNICAL SPECIFICATIONS OF SILICON RECTIFIER

VOLTAGE RANGE - 1300 to 2000 Volts CURRENT - 1.0 Ampere


FEATURES

- * Low cost
- * Low leakage
- * Low forward voltage drop
- * High current capability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.33 gram

DO-41

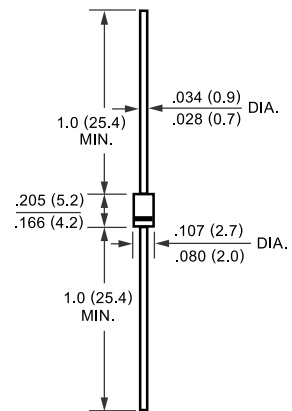

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

		SYMBOL	BY133	EM513	EM516	EM520	UNITS
Maximum Recurrent Peak Reverse Voltage		VRRM	1300	1600	1800	2000	Volts
Maximum RMS Voltage		VRMS	910	1100	1560	1400	Volts
Maximum DC Blocking Voltage		VDC	1300	1600	1800	2000	Volts
Maximum Average Forward Rectified Current at TA = 75°C		IO	1.0				Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	30				Amps
Maximum Instantaneous Forward Voltage at 1.0A DC		VF	1.1				Volts
Maximum DC Reverse Current	@ TA = 25°C	IR	5.0				uAmps
at Rated DC Blocking Voltage	@ TA = 100°C		500				
Maximum Full Load Reverse Current Average, Full Cycle .375"(9.5mm) lead length at TL = 75°C				30			
Typical Junction Capacitance (Note)		CJ	15				pF
Typical Thermal Resistance		R θ JA	50				°C/W
Operating and Storage Temperature Range		TJ, TSTG	-65 to + 175				°C

NOTES : Measured at 1 MHz and applied reverse voltage of 4.0 volts

RATING AND CHARACTERISTIC CURVES (BY133 THRU EM520)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

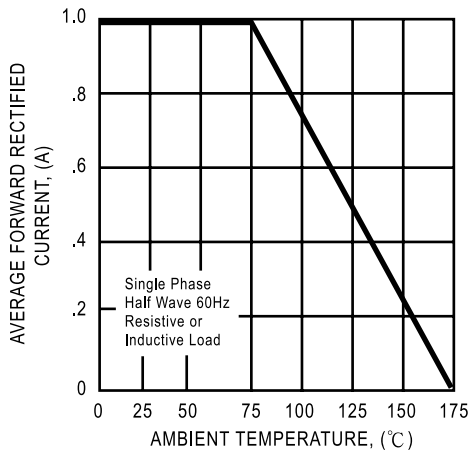


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

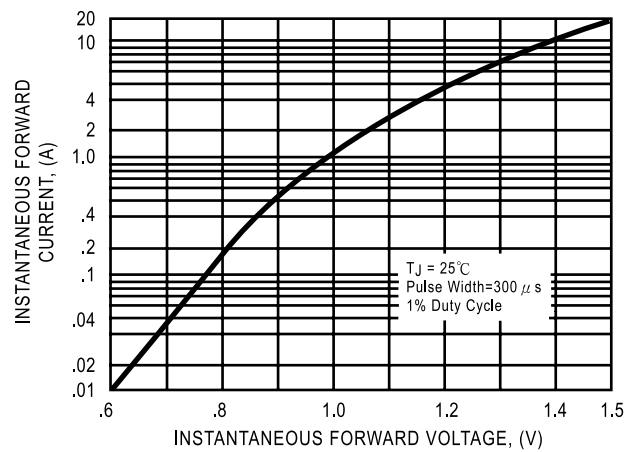


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

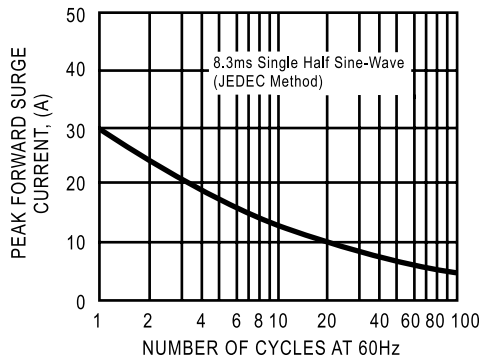


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


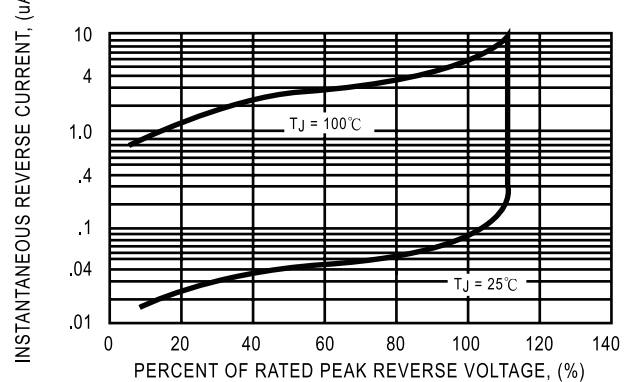


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

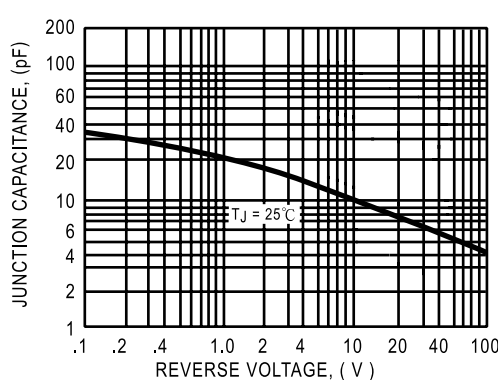

DC COMPONENTS CO., LTD.