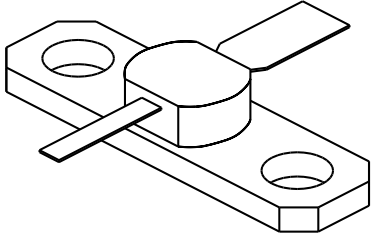

3001

1 Watt - 28 Volts, Class C
Microwave 3000 MHz

<p>GENERAL DESCRIPTION The 3001 is a COMMON BASE transistor capable of providing 1 Watts Class C, RF output power at 3000 MHz. Gold metalization and diffused ballasting are used to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder Sealed package.</p>	<p>CASE OUTLINE 55BT, STYLE 1</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 5 Watts</p> <p>Maximum Voltage and Current</p> <p>BVces Collector to Emitter Voltage 50 Volts BVebo Emitter to Base Voltage 3.5 Volts Ic Collector Current 0.20 A</p> <p>Maximum Temperatures</p> <p>Storage Temperature - 65 to + 200°C Operating Junction Temperature + 200°C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 3.0 GHz	1.0			Watt
Pin	Power Input	Vcb = 28 Volts		.14	0.2	Watt
Pg	Power Gain	Po = 1 Watts	7.0	8.5		dB
η_c	Collector Efficiency	As Above		30		%
VSWR₁	Load Mismatch Tolerance	F = 3 GHz, Po = 1 W			30:1	


BVces	Collector to Emitter Breakdown	Ic = 10 mA	50			Volts
BVcbo	Collector to Base Breakdown	Ic = 1 mA	45			Volts
BVebo	Emitter to Base Breakdown	Ie = 1 mA	3.5			Volts
Icbo	Collector to Base Current	Vcb = 28 Volts			0.5	mA
h_{FE}	Current Gain	Vce = 5 V, Ic = 100 mA	10			
Cob	Output Capacitance	F = 1 MHz, Vcb = 28 V			35	°C/W
θ_{jc}	Thermal Resistance					

Issue August 1996

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.


POWER OUTPUT VS FREQUENCY

Vcc=28V, Pin=0.2W

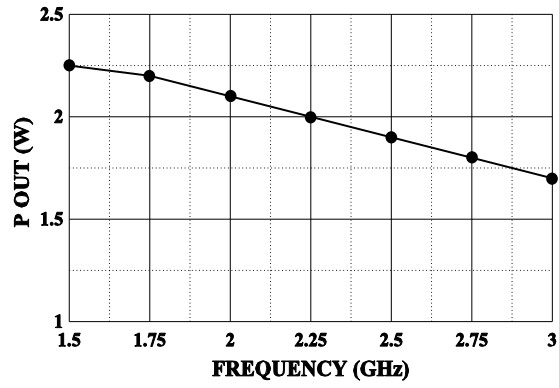


EFFICIENCY VS FREQUENCY

Pin=0.2W, Vcc=28V

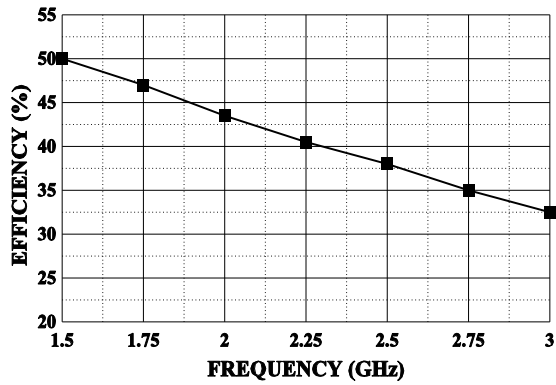


Pout VS Pin VS FREQUENCY

Vcc=28V, Pin=0.2W

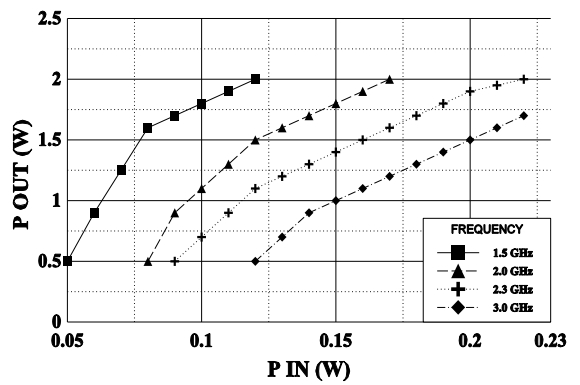


SMITH CHART 3001

NORMALIZED IMPEDANCE AND ADMITTANCE COORDINATES

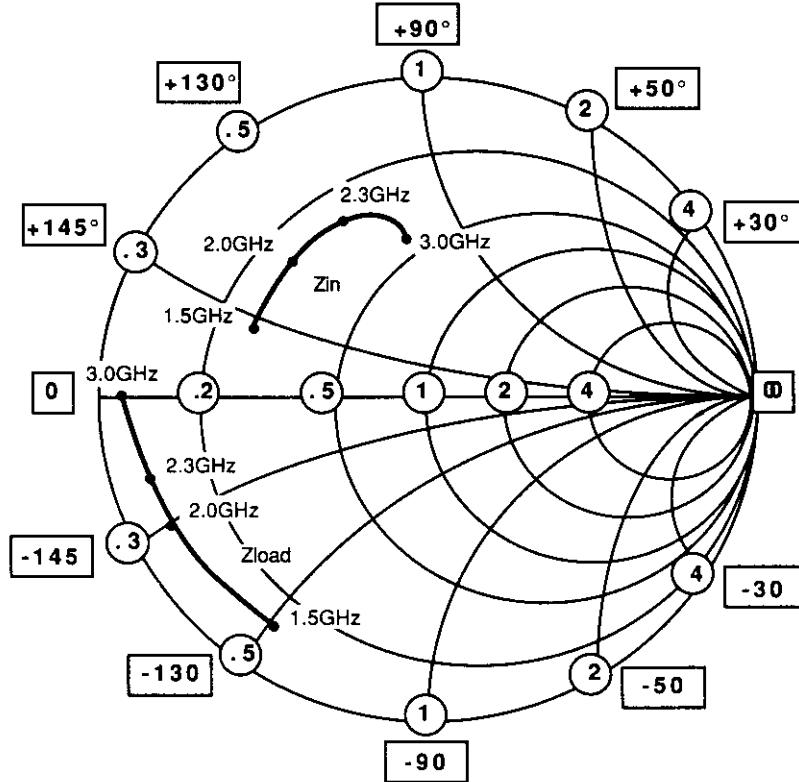


NORMALIZED TO A 50 OHM SYSTEM.



FREQUENCY MHz	R	Zin	JX	FREQUENCY MHz	R	Zload	JX
1.5	15	14	14	1.5	6	25	25
2.0	16	20	20	2.0	5	15	15
2.3	17	27	27	2.3	4.5	10	10
3.0	19	32	32	3.0	4	0	0

REVISIONS


ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

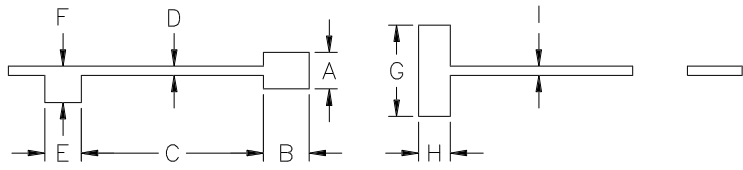

DIM	INCHES
A	.200
B	.250
C	1.000
D	.500
E	.200
F	.200
G	.500
H	.175
I	.050

3001 TEST AMPLIFIER

f = 3000 MHz

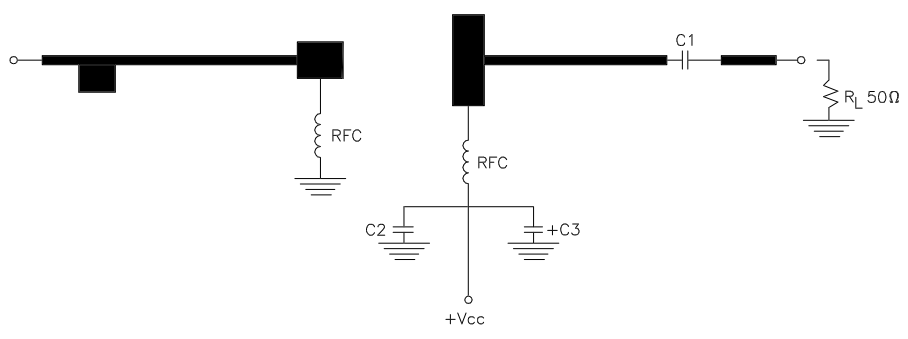

— = Microstrip on 0.020" Teflon Fiberglass, Er=2.55
 C1,C2 = ATC 'A' 47pf
 C3 = 10μfd @ 35 Volts



CAGE	DWG NO.	REV
OPJR2	3001	A
SCALE	1/1	SHEET