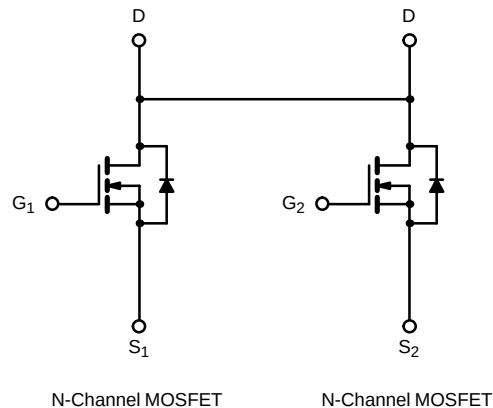
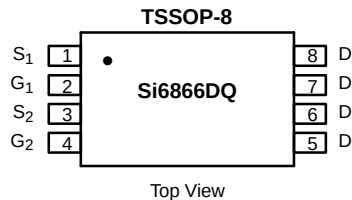




Dual N-Channel 2.5-V (G-S) MOSFET

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
20	0.030 @ $V_{GS} = 4.5$ V	± 5.8
	0.040 @ $V_{GS} = 2.5$ V	± 5.0

TrenchFET®
Power MOSFETs
2.5-V Rated

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter		Symbol	10 secs	Steady State
Drain-Source Voltage		V_{DS}	20	
Gate-Source Voltage		V_{GS}	± 12	
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	$T_A = 25^\circ\text{C}$	I_D	± 5.8	± 5.0
	$T_A = 70^\circ\text{C}$		± 4.7	± 4.0
Pulsed Drain Current (10 μs Pulse Width)		I_{DM}	± 30	
Continuous Source Current (Diode Conduction) ^a		I_S	1.5	1.1
Maximum Power Dissipation ^a	$T_A = 25^\circ\text{C}$	P_D	1.67	1.2
	$T_A = 70^\circ\text{C}$		1.06	0.76
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	

THERMAL RESISTANCE RATINGS				
Parameter		Symbol	Typical	Maximum
Maximum Junction-to-Ambient ^a	$t \leq 10$ sec	R_{thJA}	60	75
	Steady State		86	105
Maximum Junction-to-Foot	Steady State	R_{thJF}	38	45

Notes

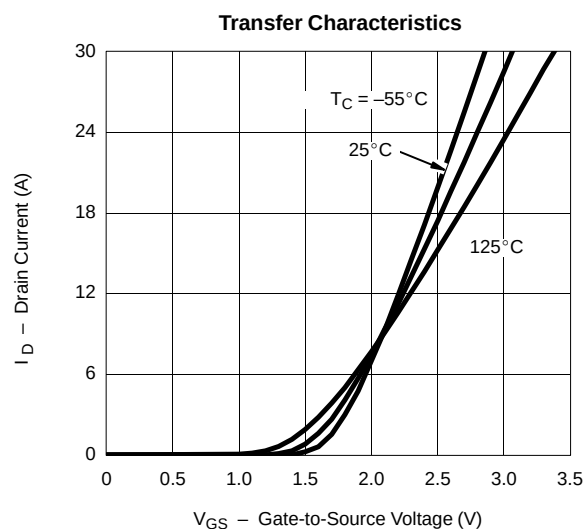
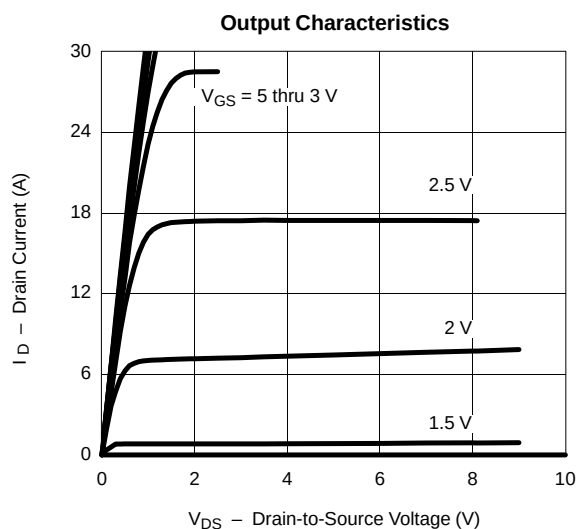
a. Surface Mounted on 1" x 1" FR4 Board.

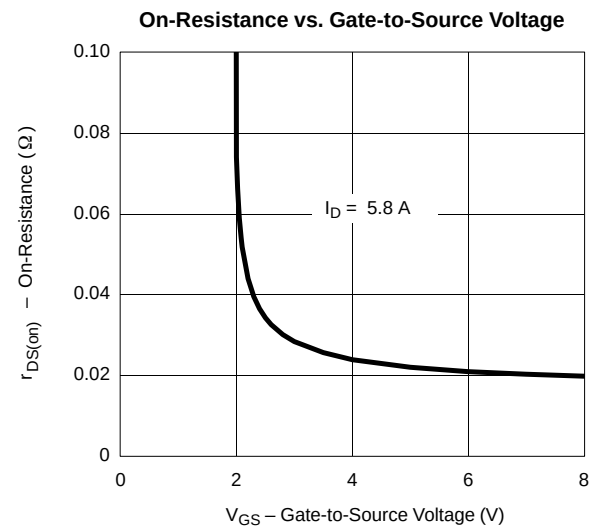
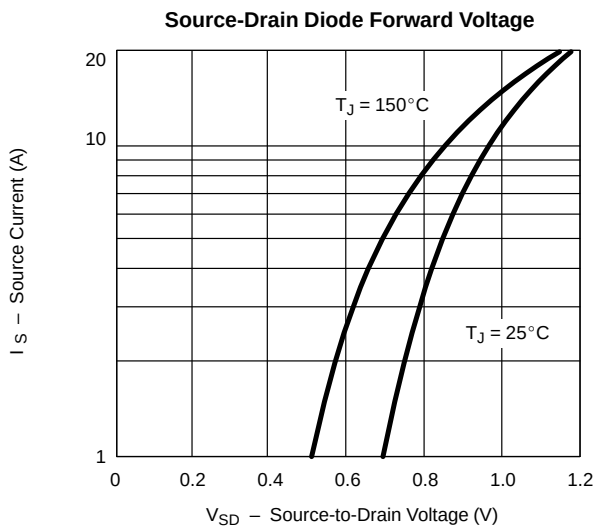
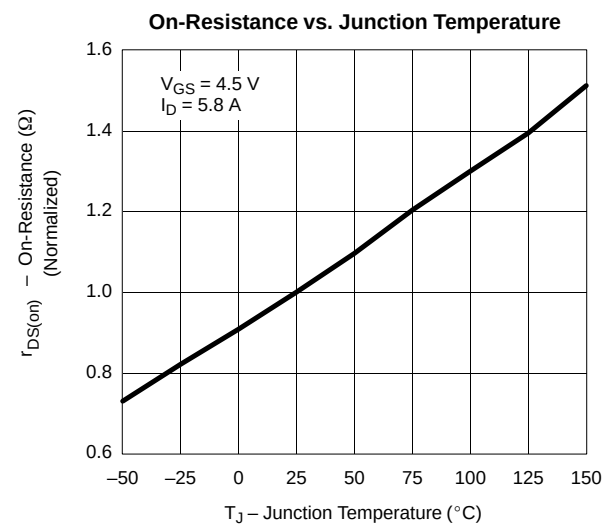
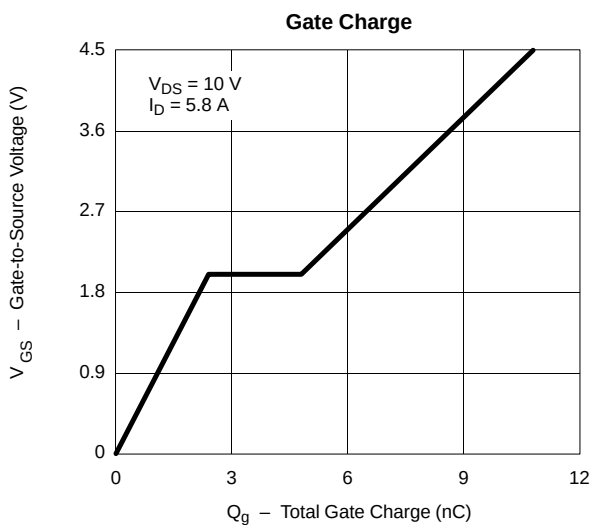
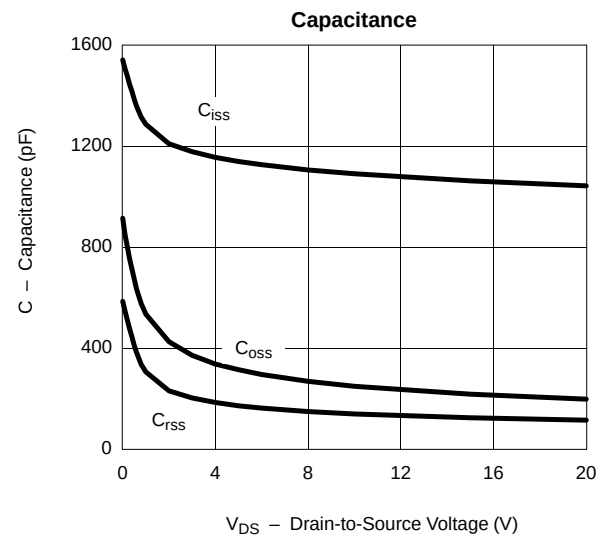
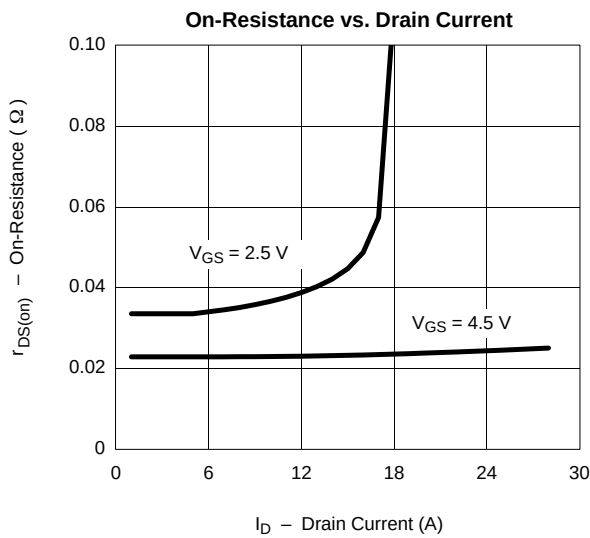
SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250\ \mu\text{A}$	0.6			V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}$, $V_{GS} = \pm 12\ \text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 16\ \text{V}$, $V_{GS} = 0\ \text{V}$			1	μA
		$V_{DS} = 16\ \text{V}$, $V_{GS} = 0\ \text{V}$, $T_J = 85^\circ\text{C}$			25	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \geq 5\ \text{V}$, $V_{GS} = 4.5\ \text{V}$	30			A
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = 4.5\ \text{V}$, $I_D = 5.8\ \text{A}$		0.023	0.030	Ω
		$V_{GS} = 2.5\ \text{V}$, $I_D = 5.0\ \text{A}$		0.033	0.040	
Forward Transconductance ^a	g_{fs}	$V_{DS} = 10\ \text{V}$, $I_D = 5.8\ \text{A}$		18		S
Diode Forward Voltage ^a	V_{SD}	$I_S = 1.5\ \text{A}$, $V_{GS} = 0\ \text{V}$		0.75	1.1	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = 10\ \text{V}$, $V_{GS} = 4.5\ \text{V}$, $I_D = 5.8\ \text{A}$		11	15	nC
Gate-Source Charge	Q_{gs}			2.4		
Gate-Drain Charge	Q_{gd}			2.4		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 10\ \text{V}$, $R_L = 10\ \Omega$ $I_D \cong 1\ \text{A}$, $V_{GEN} = 4.5\ \text{V}$, $R_G = 6\ \Omega$		17	25	ns
Rise Time	t_r			37	50	
Turn-Off Delay Time	$t_{d(off)}$			41	55	
Fall Time	t_f			24	35	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = 1.5\ \text{A}$, $di/dt = 100\ \text{A}/\mu\text{s}$		30	40	

Notes

- a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.
b. Guaranteed by design, not subject to production testing.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)
