

2SK2191
(F12S50VX2)

500V 12A

FEATURES

- Input capacitance (Ciss) is small.
Especially, input capacitance at 0 bias is small.
- The static Rds(on) is small.
- The switching time is fast.

APPLICATION


- Switching power supply of AC 100V input
- High voltage power supply
- Inverter

RATINGS

●Absolute Maximum Ratings (Tc = 25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55~150	°C
Channel Temperature	T _{ch}		150	
Drain-Source Voltage	V _{DSS}		500	V
Gate-Source Voltage	V _{GS}		±30	
Continuous Drain Current (DC)	I _D		12	A
Continuous Drain Current (Peak)	I _{DP}		36	
Continuous Source Current (DC)	I _S		12	
Total Power Dissipation	P _T		60	W
Single Pulse Avalanche Current	I _{AS}	T _{ch} = 25°C	12	A

OUTLINE DIMENSIONS

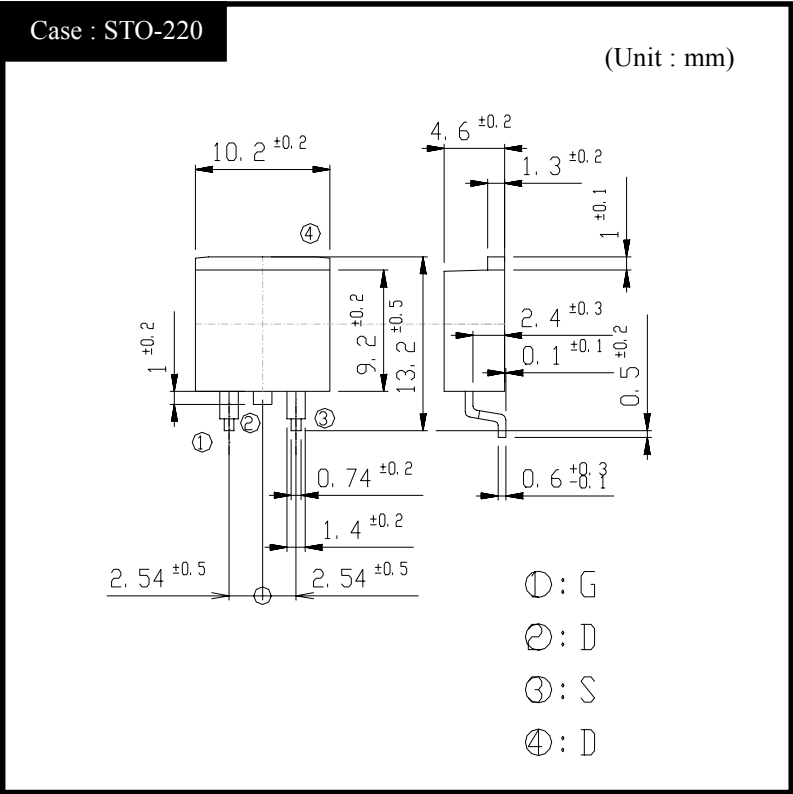


●Electrical Characteristics T_c = 25°C


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	V(BR)DSS	I _D = 1mA, V _{GS} = 0V	500			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 500V, V _{GS} = 0V			250	μ A
Gate-Source Leakage Current	I _{GSS}	V _{GS} = ±30V, V _{DS} = 0V			±0.1	
Forward Transconductance	g _{fs}	I _D = 6A, V _{DS} = 10V	3.0	7.6		S
Static Drain-Source On-state Resistance	R _{DS(ON)}	I _D = 6A, V _{GS} = 10V		0.55	0.7	Ω
Gate Threshold Voltage	V _{TH}	I _D = 1mA, V _{DS} = 10V	2.5	3.0	3.5	V
Source-Drain Diode Forwade Voltage	V _{SD}	I _S = 6A, V _{GS} = 0V			1.5	
Thermal Resistance	θ _{jc}	junction to case			2.08	°C/W
Total Gate Charge	Q _g	V _{DD} = 400V, V _{GS} = 10V, I _D = 12A		42		nC
Input Capacitance	C _{iss}	V _{DS} = 10V, V _{GS} = 0V, f = 1MHz		1200		pF
Reverse Transfer Capacitance	C _{rss}			90		
Output Capacitance	C _{oss}			270		
Turn-On Time	t _{on}	I _D = 6A, V _{GS} = 10V, R _L = 25 Ω		90	130	ns
Turn-Off Time	t _{off}			190	280	

2SK2191


Transfer Characteristics

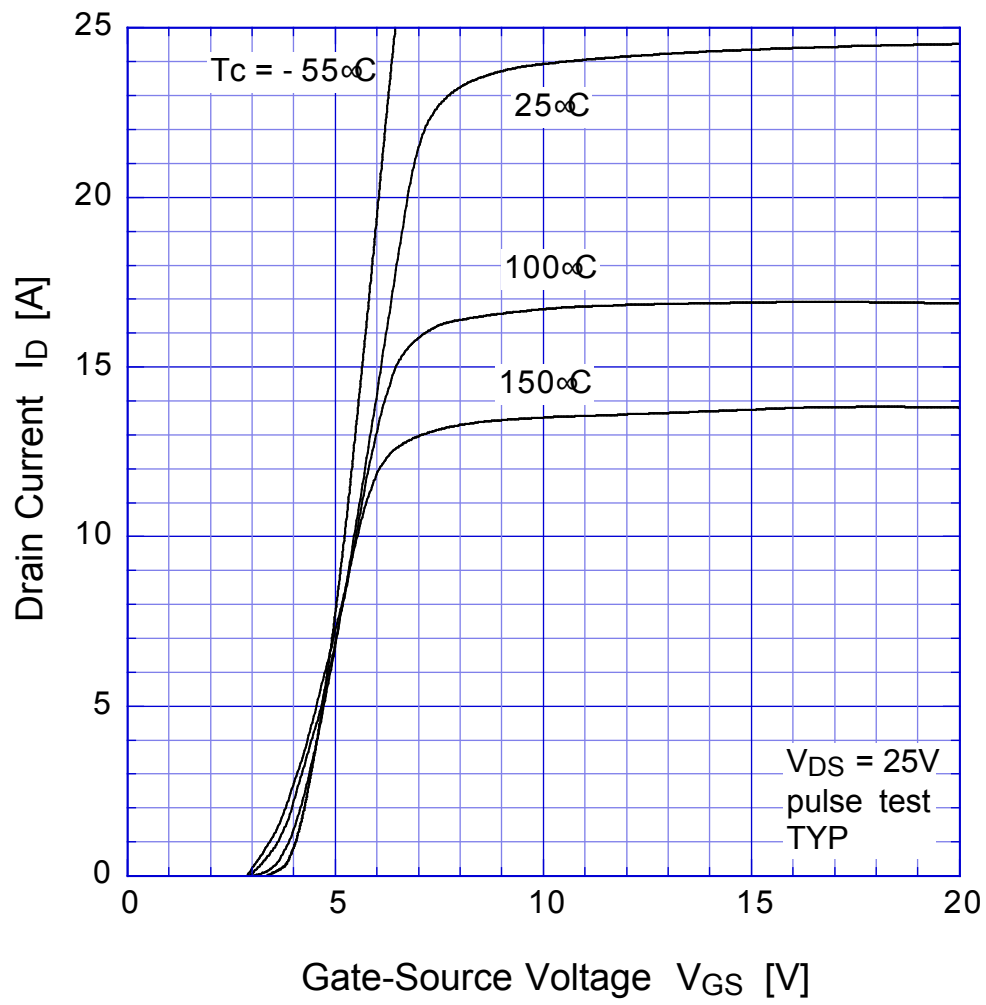

2SK2191 Static Drain-Source On-state Resistance

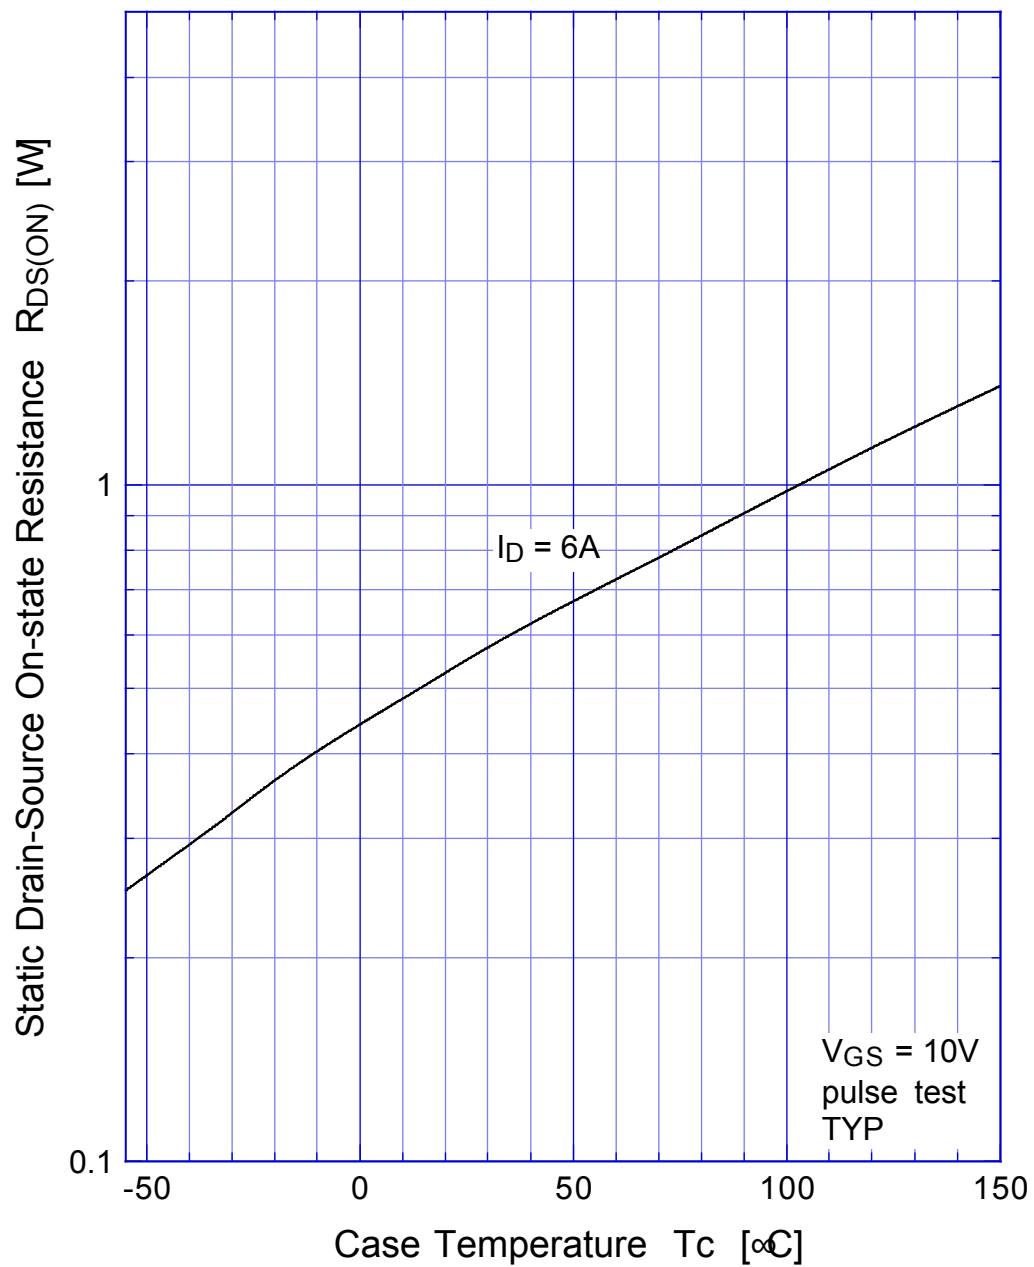


2SK2191 Gate Threshold Voltage

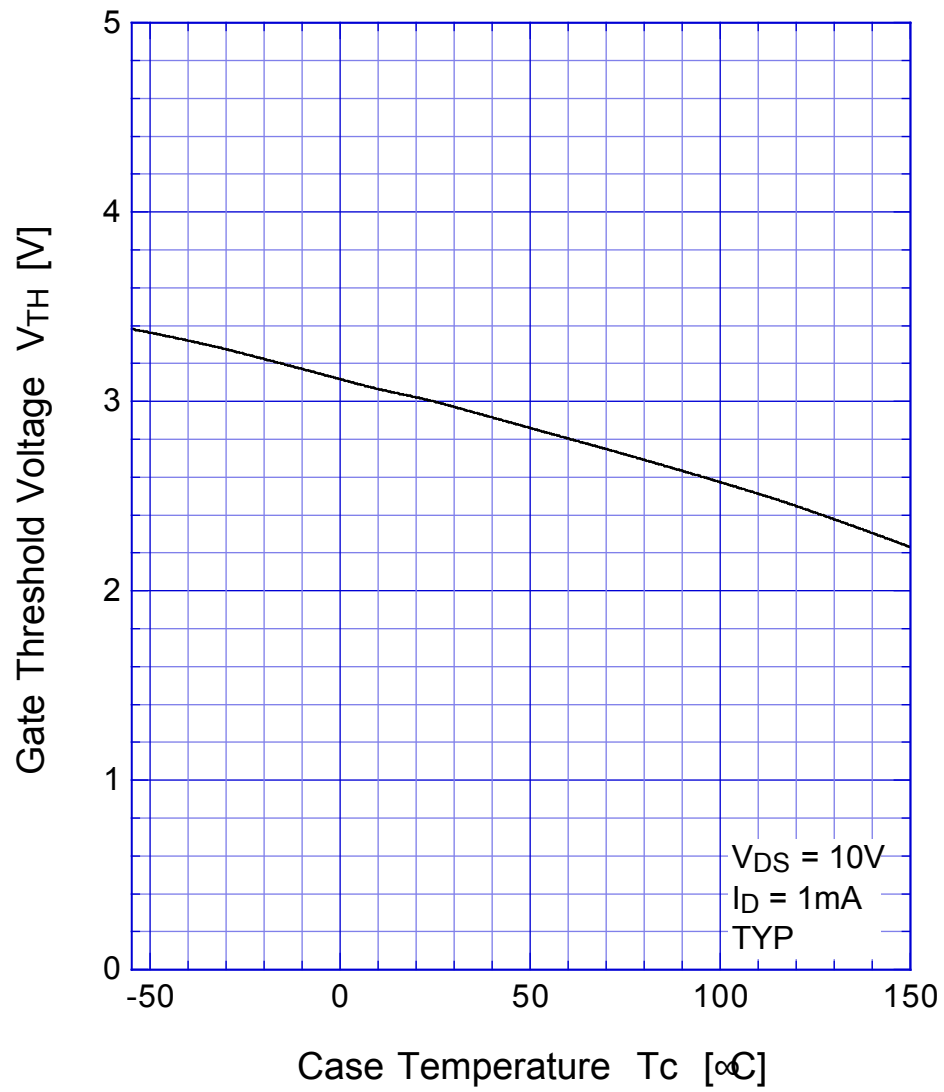


2SK2191


Safe Operating Area

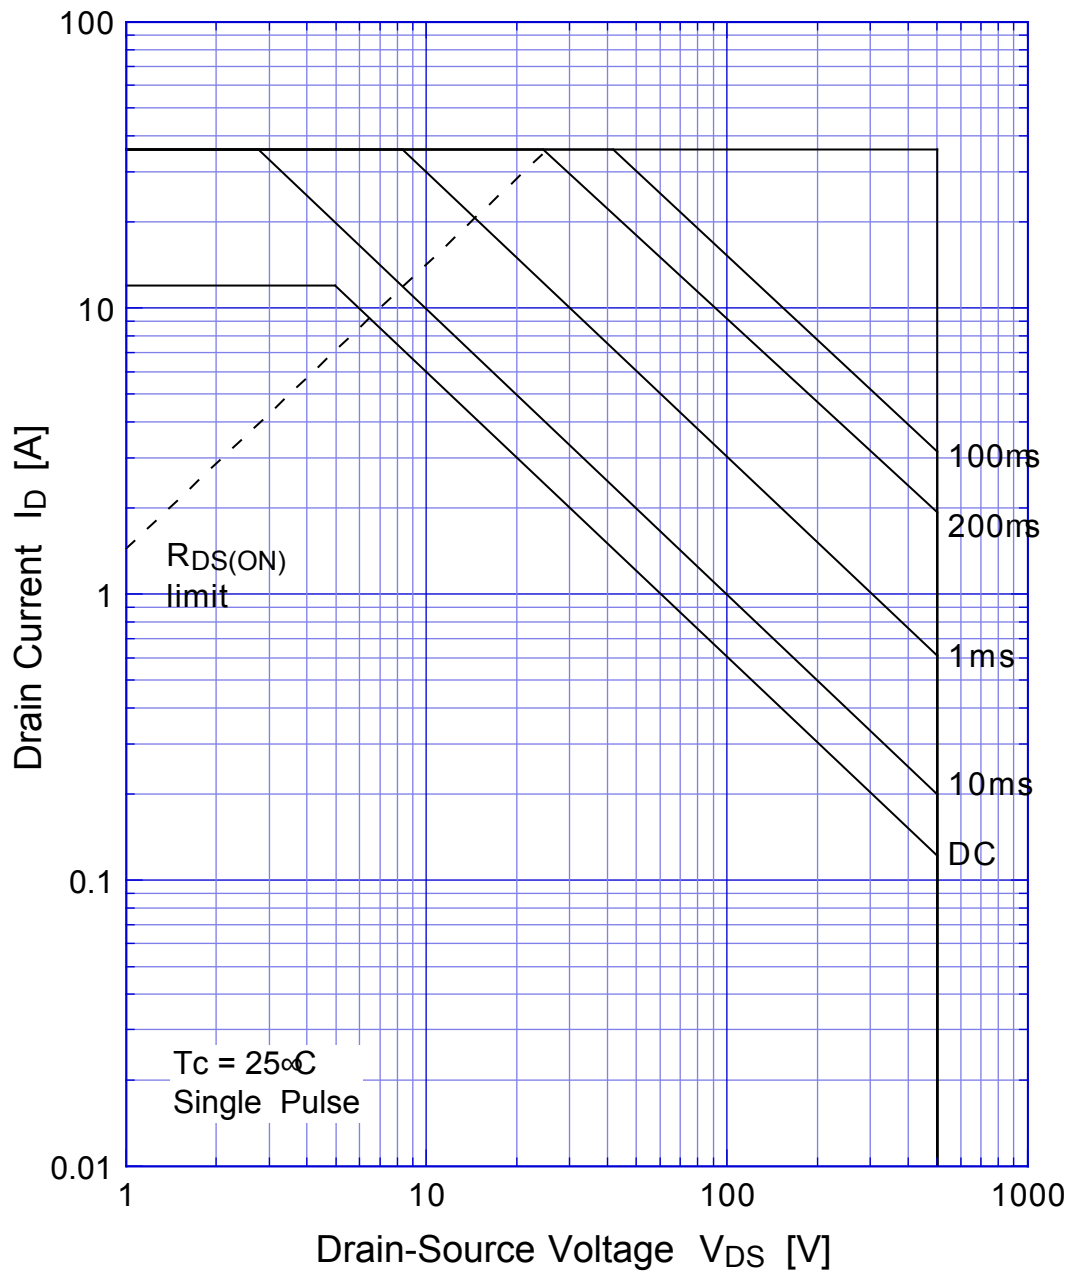

2SK2191 Transient Thermal Impedance

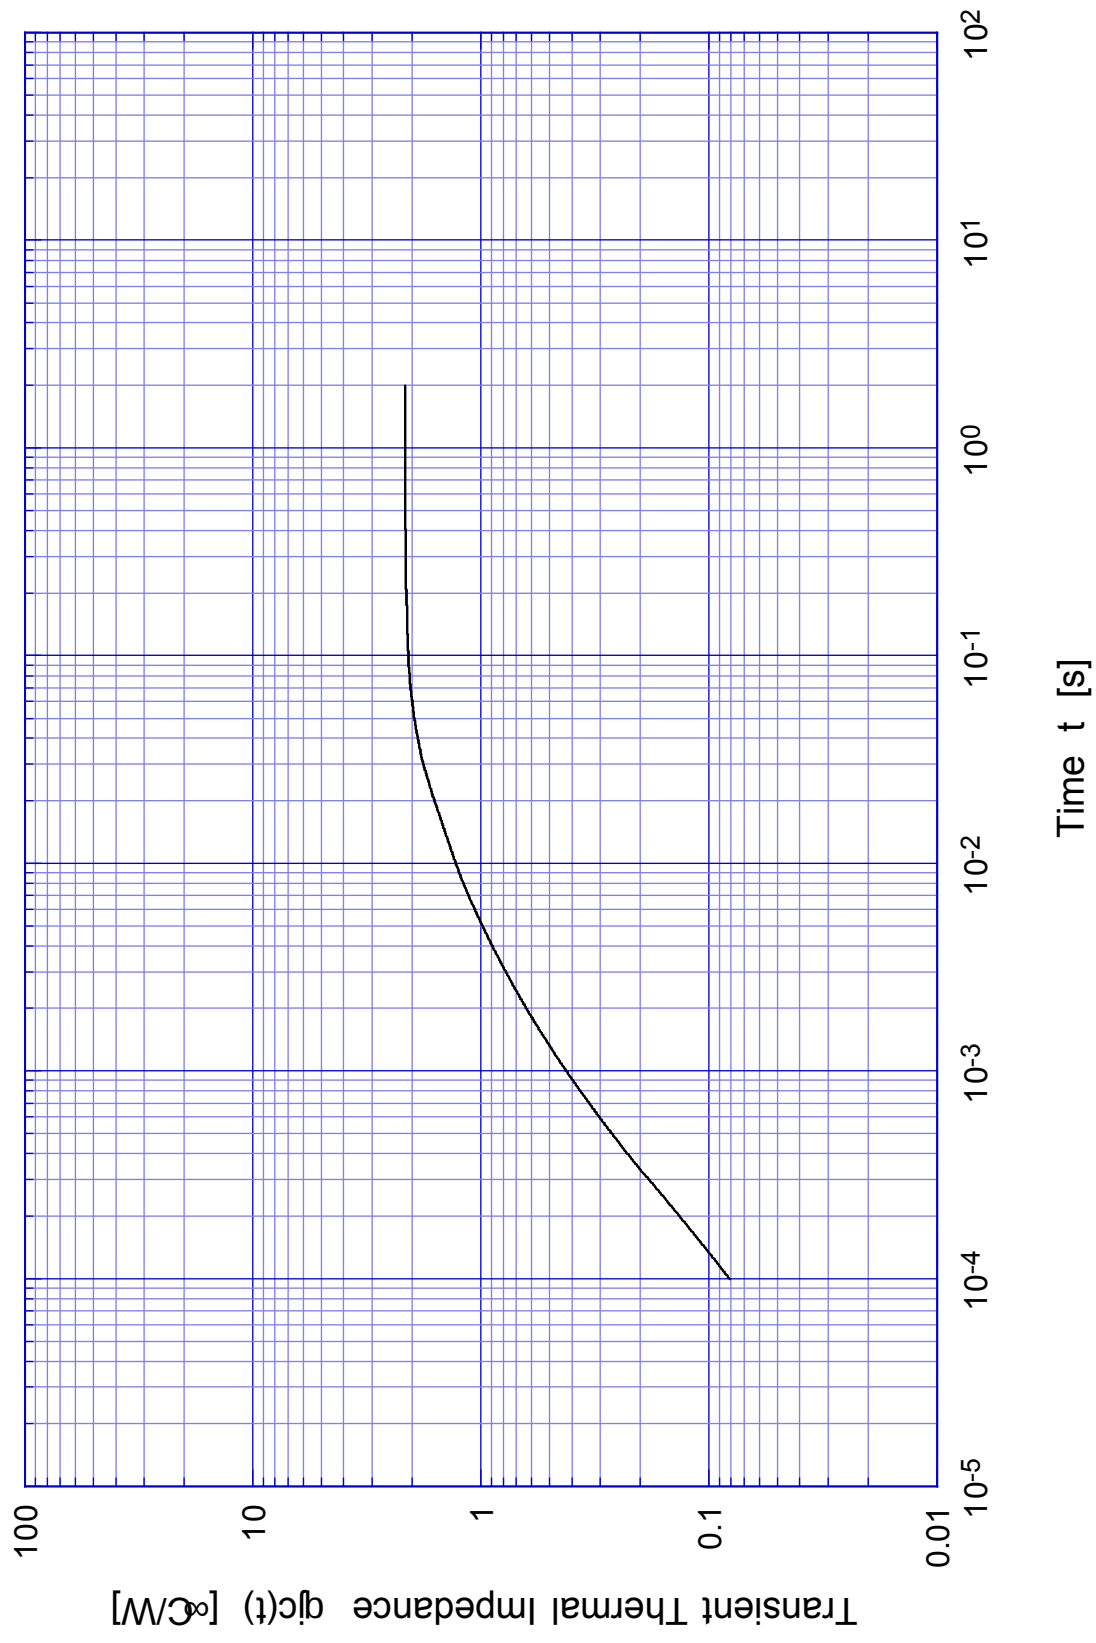


2SK2191 Capacitance

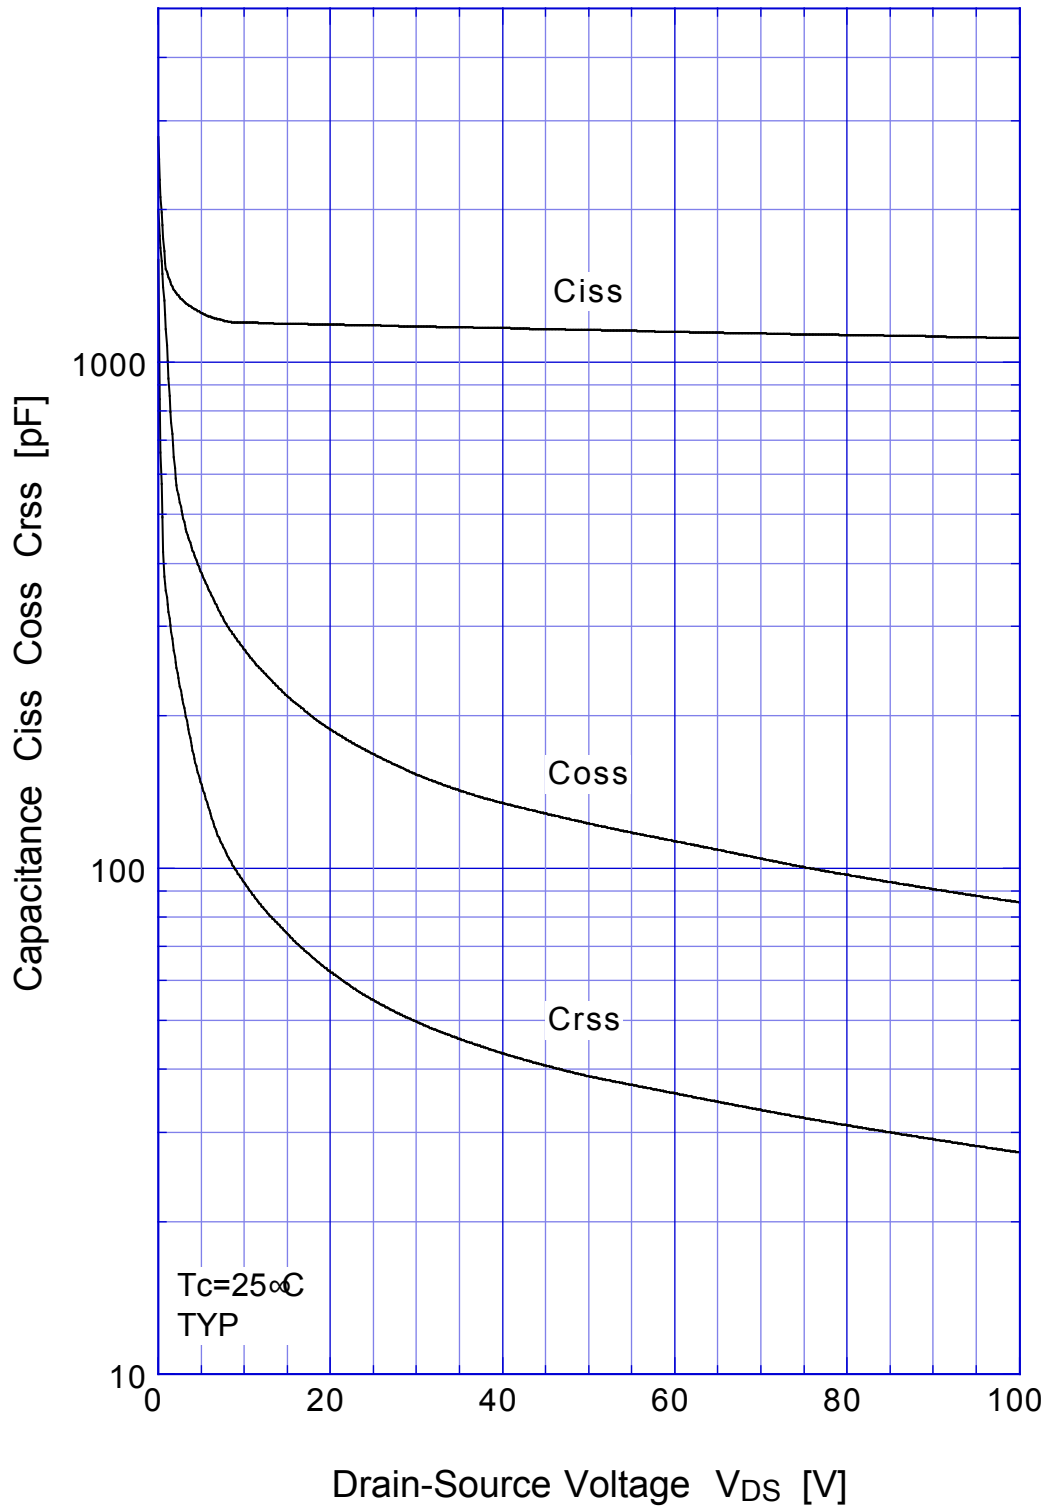

2SK2191

Power Derating

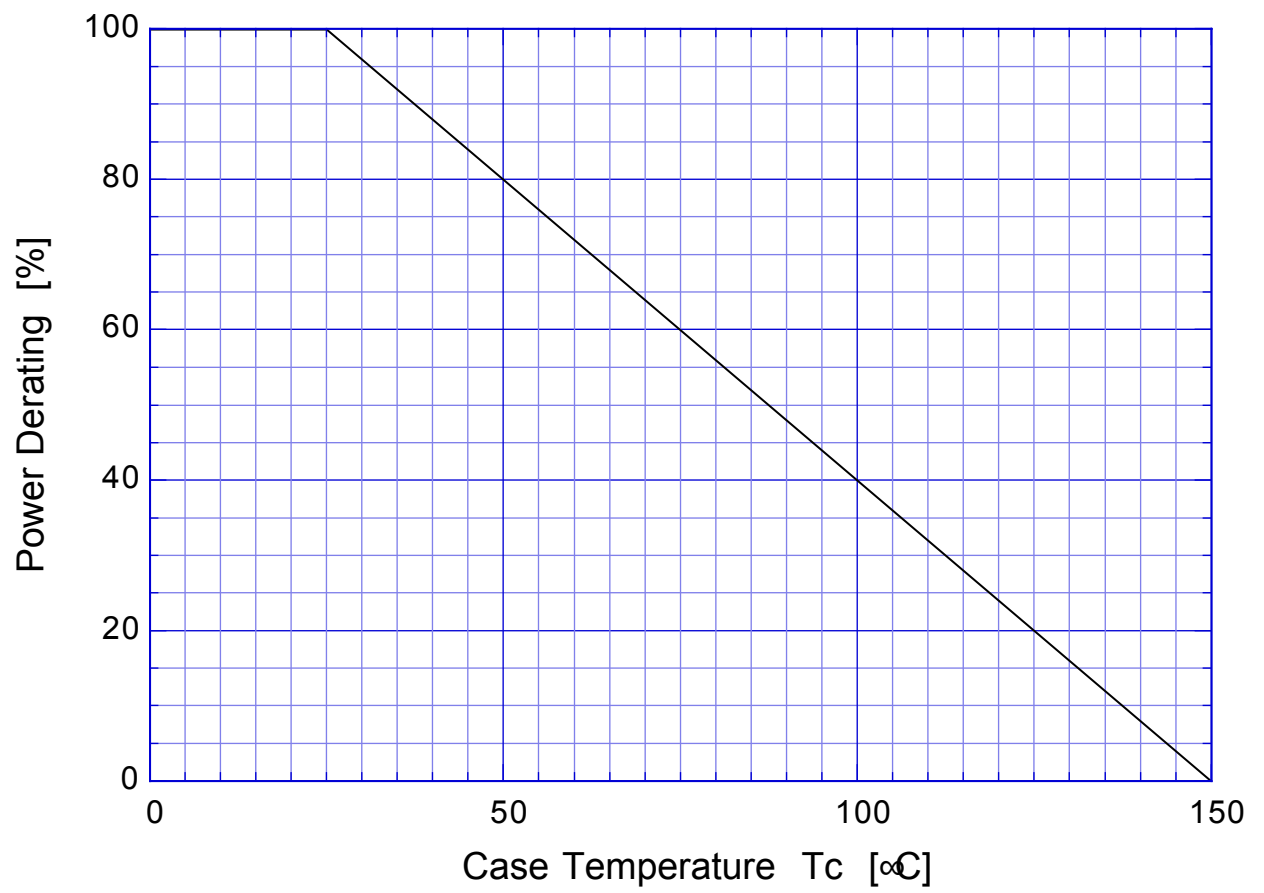

2SK2191

Gate Charge Characteristics

