

SK32 THRU S310


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE - 20 to 100 Volts CURRENT - 3.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

SMC/DO-214AB

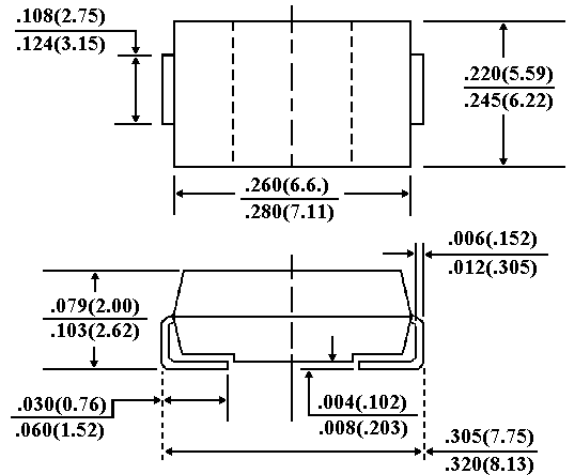

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Standard packaging: 16mm tape (EIA-481)

Weight: 0.007 ounce, 0.21 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SK32	SK33	SK34	SK35	SK36	SK38	SK39	S310	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	64	71	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at T _L =75 °C	I _(AV)	3.0								Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	100								Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V _F	0.50			0.70		0.85			Volts
Maximum DC Reverse Current T _A =25 °C (Note 1)	I _R	0.5								mA
At Rated DC Blocking Voltage T _A =100 °C		20.0								
Maximum Thermal Resistance (Note 2)	R _{θKJL} R _{θKJA}	17 55								°C/W
Operating Junction Temperature Range	T _J	-50 to +125								°C
Storage Temperature Range	T _{STG}	-50 to +150								°C

NOTES:

1. Pulse Test with PW=300 µsec, 2% Duty Cycle.
2. Mounted on P.C.Board with 14mm² (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

SK32 THRU S310

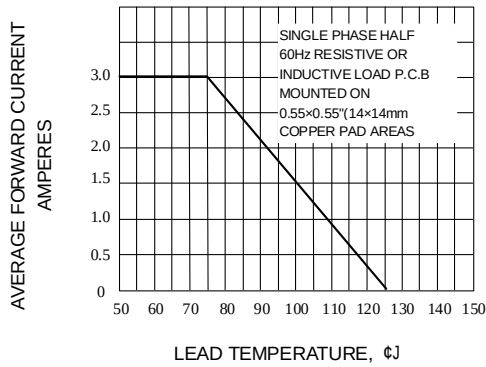


Fig. 1-FORWARD CURRENT DERATING CURVE

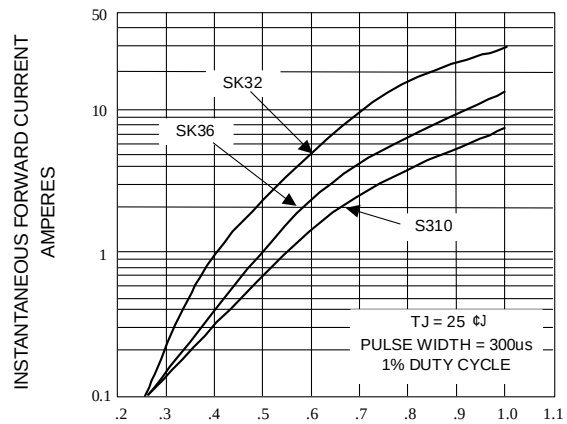


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

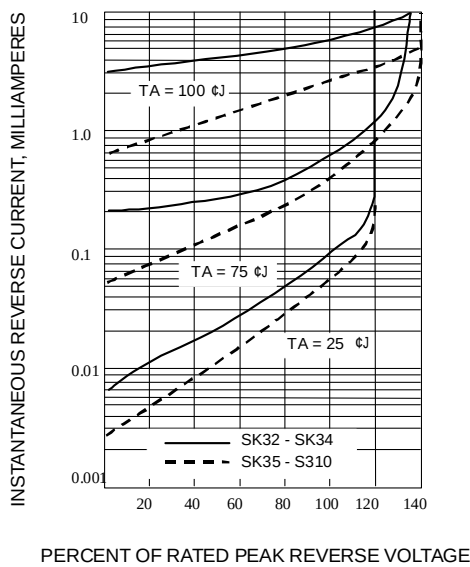


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

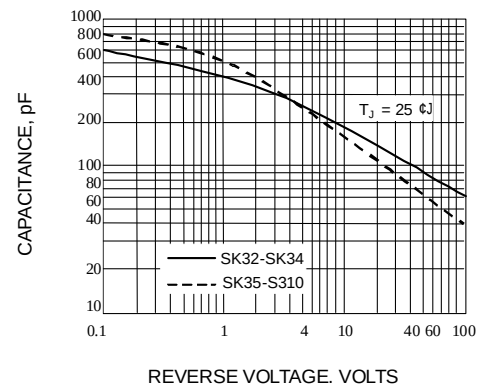


Fig. 4-TYPICAL JUNCTION CAPACITANCE

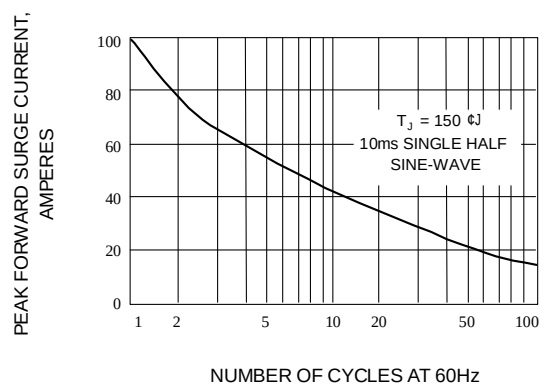


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT