



# 1N5391 THRU 1N5399

## 1.5 AMPS. Silicon Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
1.5 Amperes


### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-O rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.40 gram

### DO-15

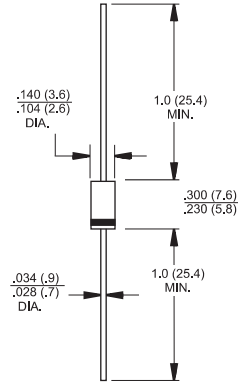

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	1N5391	1N5392	1N5393	1N5395	1N5397	1N5398	1N5399	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ $T_A = 75^\circ\text{C}$	$I_{(AV)}$	1.5							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	50							A
Maximum Instantaneous Forward Voltage @ 1.5A	$V_F$	1.1	1.0					V	
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	$I_R$	5.0					50		$\mu\text{A}$ $\mu\text{A}$
Maximum Full Load Reverse Current, Full Cycle Average .375" (9.5mm) Lead Length @ $T_A=75^\circ\text{C}$	$HT_{IR}$	30							$\mu\text{A}$
Typical Junction Capacitance ( Note 1 )	$C_j$	50							pF
Typical Thermal Resistance ( Note 2 )	$R_{\theta_{JA}}$	60							$^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_J$	-65 to +150							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150							$^\circ\text{C}$

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

2. Mount on Cu-Pad Size 10mm x 10mm on P.C.B.

## RATINGS AND CHARACTERISTIC CURVES (1N5391 THRU 1N5399)

