



# STW9NC80Z

## N-CHANNEL 800V - 0.82Ω - 9.4A TO-247 Zener-Protected PowerMESH™III MOSFET

| TYPE      | V <sub>DSS</sub> | R <sub>DS(on)</sub> | I <sub>D</sub> |
|-----------|------------------|---------------------|----------------|
| STW9NC80Z | 800 V            | <0.9Ω               | 9.4 A          |

- TYPICAL R<sub>DS(on)</sub> = 0.82Ω
- EXTREMELY HIGH dv/dt CAPABILITY
- GATE-TO-SOURCE ZENER DIODES
- 100% AVALANCHE TESTED
- VERY LOW INTRINSIC CAPACITANCES
- GATE CHARGE MINIMIZED

### DESCRIPTION

The third generation of MESH OVERLAY™ Power MOSFETs for very high voltage exhibits unsurpassed on-resistance per unit area while integrating back-to-back Zener diodes between gate and source. Such arrangement gives extra ESD capability with higher ruggedness performance as requested by a large variety of single-switch applications.

### APPLICATIONS



- SINGLE-ENDED SMPS IN MONITORS, COMPUTER AND INDUSTRIAL APPLICATION
- WELDING EQUIPMENT

### ABSOLUTE MAXIMUM RATINGS

| Symbol                | Parameter                                            | Value      | Unit |
|-----------------------|------------------------------------------------------|------------|------|
| V <sub>DS</sub>       | Drain-source Voltage (V <sub>GS</sub> = 0)           | 800        | V    |
| V <sub>DGR</sub>      | Drain-gate Voltage (R <sub>GS</sub> = 20 kΩ)         | 800        | V    |
| V <sub>GS</sub>       | Gate- source Voltage                                 | ±25        | V    |
| I <sub>D</sub>        | Drain Current (continuous) at T <sub>C</sub> = 25°C  | 9.4        | A    |
| I <sub>D</sub>        | Drain Current (continuous) at T <sub>C</sub> = 100°C | 5.9        | A    |
| I <sub>DM</sub> (1)   | Drain Current (pulsed)                               | 38         | A    |
| P <sub>TOT</sub>      | Total Dissipation at T <sub>C</sub> = 25°C           | 190        | W    |
|                       | Derating Factor                                      | 1.52       | W/°C |
| I <sub>GS</sub>       | Gate-source Current                                  | ±50        | mA   |
| V <sub>ESD(G-S)</sub> | Gate source ESD(HBM-C=100pF, R=15KΩ)                 | 4          | KV   |
| dv/dt(●)              | Peak Diode Recovery voltage slope                    | 3          | V/ns |
| V <sub>ISO</sub>      | Insulation Winthstand Voltage (DC)                   | --         | V    |
| T <sub>stg</sub>      | Storage Temperature                                  | -65 to 150 | °C   |
| T <sub>j</sub>        | Max. Operating Junction Temperature                  | 150        | °C   |

(\*)Pulse width limited by safe operating area

(1)I<sub>SD</sub> ≤ 9.4A, di/dt ≤ 100A/μs, V<sub>DD</sub> ≤ V<sub>(BR)DSS</sub>, T<sub>j</sub> ≤ T<sub>JMAX</sub>

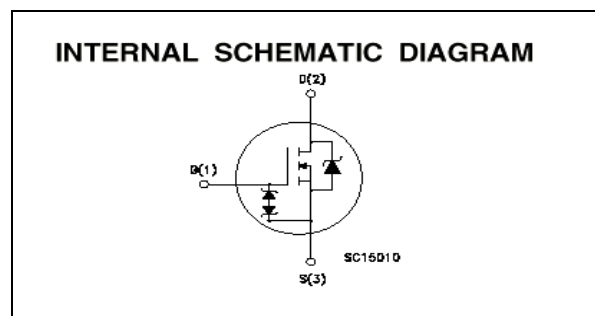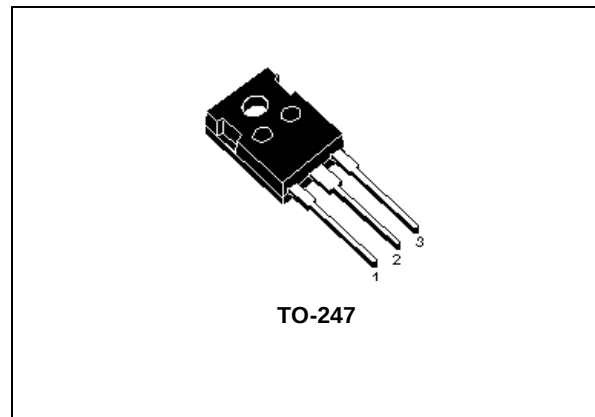

## STW9NC80Z

### THERMAL DATA

|                |                                                |      |      |
|----------------|------------------------------------------------|------|------|
| Rthj-case      | Thermal Resistance Junction-case Max           | 0.66 | °C/W |
| Rthj-amb       | Thermal Resistance Junction-ambient Max        | 30   | °C/W |
| Rthc-sink      | Thermal Resistance Case-sink Typ               | 0.1  | °C/W |
| T <sub>l</sub> | Maximum Lead Temperature For Soldering Purpose | 300  | °C   |

### AVALANCHE CHARACTERISTICS

| Symbol          | Parameter                                                                                                                  | Max Value | Unit |
|-----------------|----------------------------------------------------------------------------------------------------------------------------|-----------|------|
| I <sub>AR</sub> | Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by T <sub>j</sub> max)                                | 9.4       | A    |
| E <sub>AS</sub> | Single Pulse Avalanche Energy (starting T <sub>j</sub> = 25 °C, I <sub>D</sub> = I <sub>AR</sub> , V <sub>DD</sub> = 50 V) | 350       | mJ   |

### ELECTRICAL CHARACTERISTICS (T<sub>CASE</sub> = 25 °C UNLESS OTHERWISE SPECIFIED) OFF

| Symbol                              | Parameter                                             | Test Conditions                                                                       | Min. | Typ. | Max.    | Unit     |
|-------------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------|------|------|---------|----------|
| V <sub>(BR)DSS</sub>                | Drain-source Breakdown Voltage                        | I <sub>D</sub> = 250 µA, V <sub>GS</sub> = 0                                          | 800  |      |         | V        |
| ΔBV <sub>DSS</sub> /ΔT <sub>J</sub> | Breakdown Voltage Temp. Coefficient                   | I <sub>D</sub> = 1 mA, V <sub>GS</sub> = 0                                            |      | 1    |         | V/°C     |
| I <sub>DSS</sub>                    | Zero Gate Voltage Drain Current (V <sub>GS</sub> = 0) | V <sub>DS</sub> = Max Rating<br>V <sub>DS</sub> = Max Rating, T <sub>C</sub> = 125 °C |      |      | 1<br>50 | µA<br>µA |
| I <sub>GSS</sub>                    | Gate-body Leakage Current (V <sub>DS</sub> = 0)       | V <sub>GS</sub> = ±20V                                                                |      |      | ±10     | µA       |

### ON (1)

| Symbol              | Parameter                         | Test Conditions                                                                          | Min. | Typ. | Max. | Unit |
|---------------------|-----------------------------------|------------------------------------------------------------------------------------------|------|------|------|------|
| V <sub>GS(th)</sub> | Gate Threshold Voltage            | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250µA                               | 3    | 4    | 5    | V    |
| R <sub>DS(on)</sub> | Static Drain-source On Resistance | V <sub>GS</sub> = 10V, I <sub>D</sub> = 4.7A                                             |      | 0.82 | 0.9  | Ω    |
| I <sub>D(on)</sub>  | On State Drain Current            | V <sub>DS</sub> > I <sub>D(on)</sub> × R <sub>DS(on)</sub> max,<br>V <sub>GS</sub> = 10V | 9.4  |      |      | A    |

### DYNAMIC

| Symbol           | Parameter                    | Test Conditions                                                                          | Min. | Typ. | Max. | Unit |
|------------------|------------------------------|------------------------------------------------------------------------------------------|------|------|------|------|
| g <sub>fs</sub>  | Forward Transconductance     | V <sub>DS</sub> > I <sub>D(on)</sub> × R <sub>DS(on)</sub> max,<br>I <sub>D</sub> = 4.7A |      | 13   |      | S    |
| C <sub>iss</sub> | Input Capacitance            | V <sub>DS</sub> = 25V, f = 1 MHz, V <sub>GS</sub> = 0                                    |      | 3500 |      | pF   |
| C <sub>oss</sub> | Output Capacitance           |                                                                                          |      | 230  |      | pF   |
| C <sub>rss</sub> | Reverse Transfer Capacitance |                                                                                          |      | 25   |      | pF   |

## ELECTRICAL CHARACTERISTICS (CONTINUED)

## SWITCHING ON (RESISTIVE LOAD)

| Symbol      | Parameter          | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit |
|-------------|--------------------|------------------------------------------------------------------------------------------------------|------|------|------|------|
| $t_{d(on)}$ | Turn-on Delay Time | $V_{DD} = 400V$ , $I_D = 4.5A$<br>$R_G = 4.7\Omega$ , $V_{GS} = 10V$<br>(see test circuit, Figure 3) |      | 35   |      | ns   |
| $t_r$       | Rise Time          |                                                                                                      |      | 16   |      | ns   |
| $Q_g$       | Total Gate Charge  | $V_{DD} = 640V$ , $I_D = 9A$ ,<br>$V_{GS} = 10V$                                                     |      | 72.2 | 101  | nC   |
| $Q_{gs}$    | Gate-Source Charge |                                                                                                      |      | 19.5 |      | nC   |
| $Q_{gd}$    | Gate-Drain Charge  |                                                                                                      |      | 24.3 |      | nC   |

## SWITCHING OFF (INDUCTIVE LOAD)

| Symbol        | Parameter             | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit |
|---------------|-----------------------|------------------------------------------------------------------------------------------------------|------|------|------|------|
| $t_{r(Voff)}$ | Off-voltage Rise Time | $V_{DD} = 640V$ , $I_D = 9A$ ,<br>$R_G = 4.7\Omega$ , $V_{GS} = 10V$<br>(see test circuit, Figure 5) |      | 32   |      | ns   |
| $t_f$         | Fall Time             |                                                                                                      |      | 42   |      | ns   |
| $t_c$         | Cross-over Time       |                                                                                                      |      | 67   |      | ns   |

## SOURCE DRAIN DIODE

| Symbol       | Parameter                     | Test Conditions                                                                                                 | Min. | Typ. | Max. | Unit    |
|--------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------|------|------|------|---------|
| $I_{SD}$     | Source-drain Current          |                                                                                                                 |      |      | 9.4  | A       |
| $I_{SDM(2)}$ | Source-drain Current (pulsed) |                                                                                                                 |      |      | 38   | A       |
| $V_{SD(1)}$  | Forward On Voltage            | $I_{SD} = 9A$ , $V_{GS} = 0$                                                                                    |      |      | 1.6  | V       |
| $t_{rr}$     | Reverse Recovery Time         | $I_{SD} = 9A$ , $di/dt = 100A/\mu s$ ,<br>$V_{DD} = 100V$ , $T_j = 150^\circ C$<br>(see test circuit, Figure 5) |      | 730  |      | ns      |
| $Q_{rr}$     | Reverse Recovery Charge       |                                                                                                                 |      | 7.2  |      | $\mu C$ |
| $I_{RRM}$    | Reverse Recovery Current      |                                                                                                                 |      | 19.5 |      | A       |

## GATE-SOURCE ZENER DIODE

| Symbol     | Parameter                     | Test Conditions                 | Min. | Typ. | Max. | Unit               |
|------------|-------------------------------|---------------------------------|------|------|------|--------------------|
| $BV_{GSO}$ | Gate-Source Breakdown Voltage | $I_{GS} = \pm 1mA$ (Open Drain) | 25   |      |      | V                  |
| $\alpha T$ | Voltage Thermal Coefficient   | $T = 25^\circ C$ Note(3)        |      | 1.3  |      | $10^{-4}/^\circ C$ |
| $R_z$      | Dynamic Resistance            | $I_{GS} = 50mA$ , $V_{GS} = 0$  |      | 90   |      | $\Omega$           |

Note: 1. Pulsed: Pulse duration = 300  $\mu s$ , duty cycle 1.5 %.


2. Pulse width limited by safe operating area.

3.  $\Delta V_{BV} = \alpha T (25^\circ - T) BV_{GSO}(25^\circ)$


## PROTECTION FEATURES OF GATE-TO-SOURCE ZENER DIODES

The built-in back-to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the 25V Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.


Safe Operating Area For TO-247

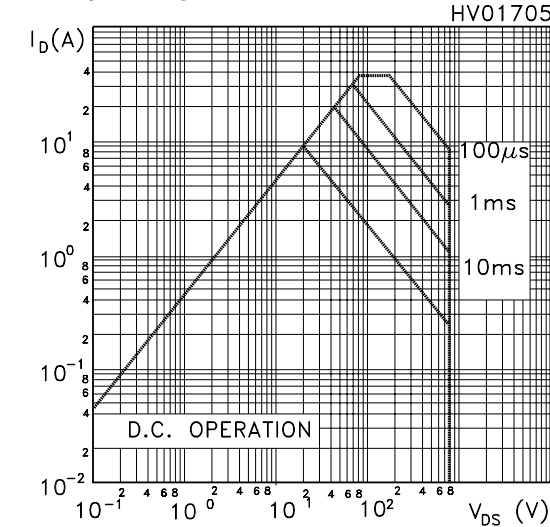


Output Characteristics

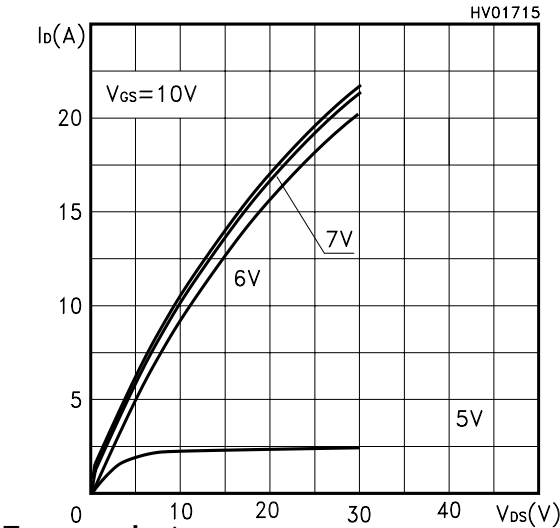


Transconductance

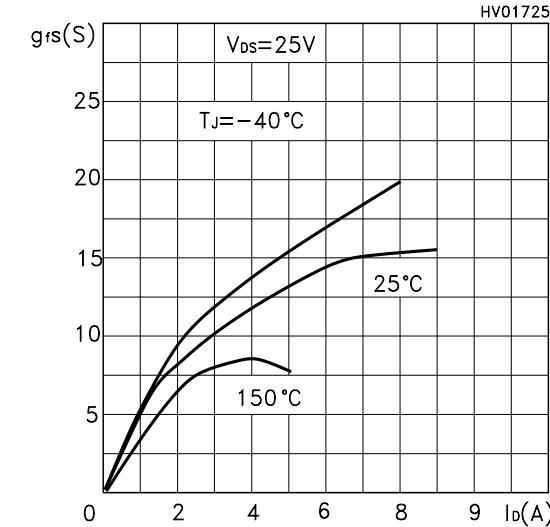


Thermal Impedance For TO-247

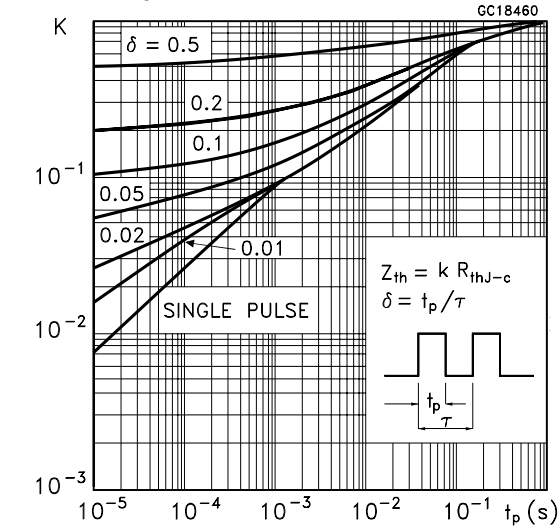


Transfer Characteristics

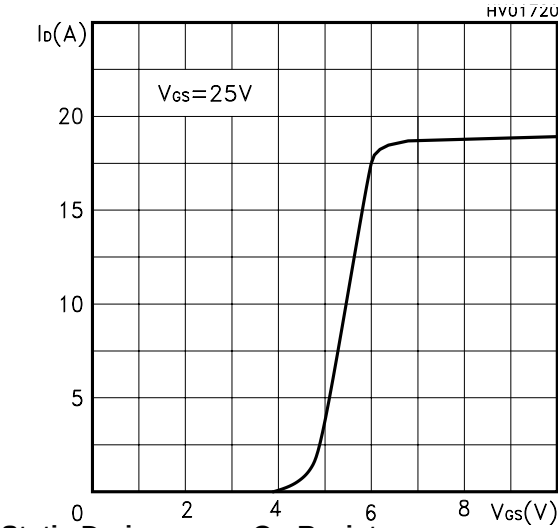


Static Drain-source On Resistance

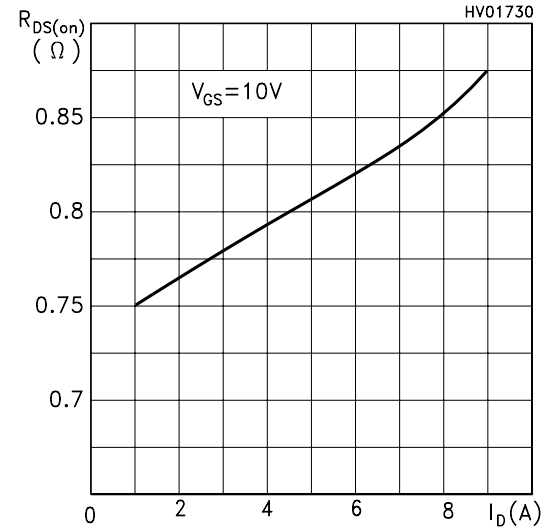


Gate Charge vs Gate-source Voltage

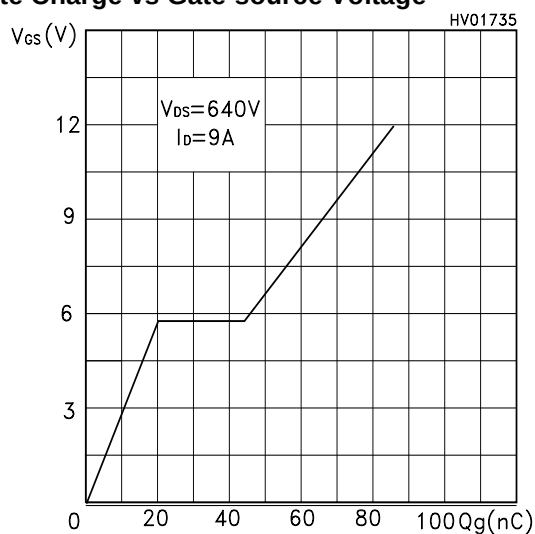


Capacitance Variations

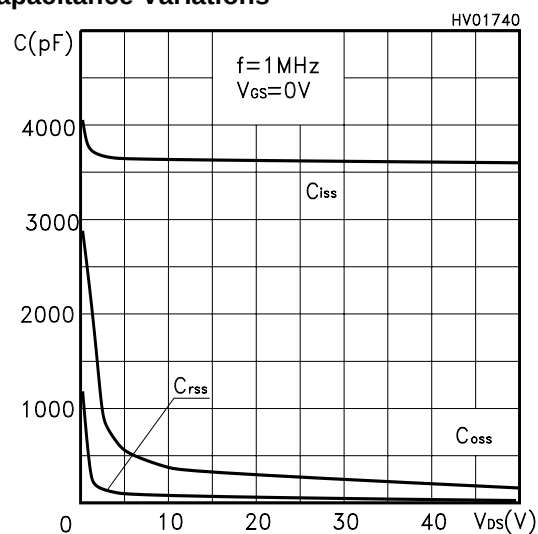


Normalized Gate Threshold Voltage vs Temp.

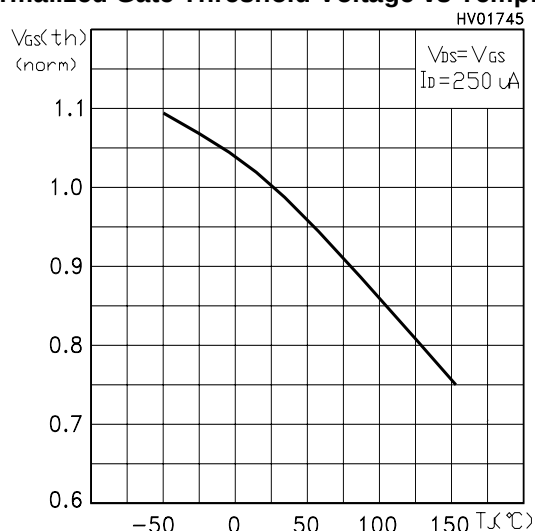


Normalized On Resistance vs Temperature

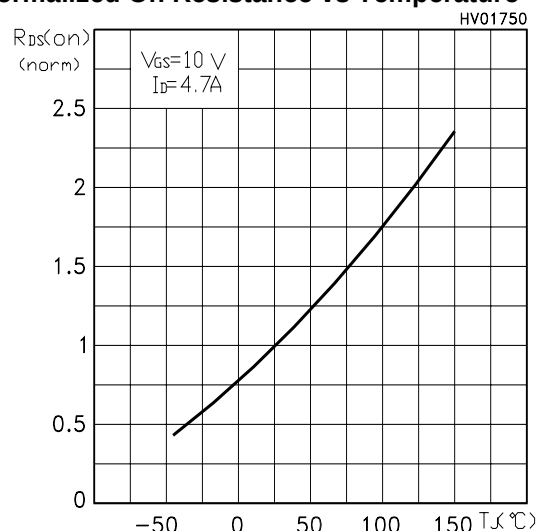

Source-drain Diode Forward Characteristics

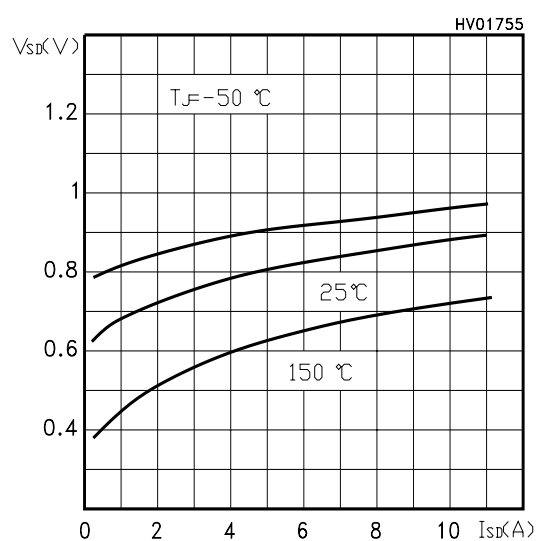


**Fig. 1: Unclamped Inductive Load Test Circuit**

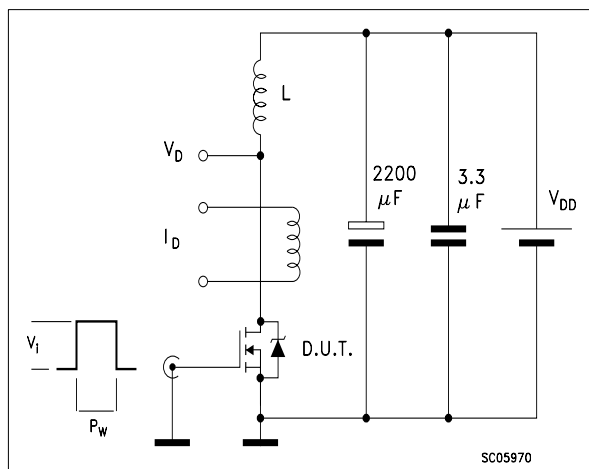


**Fig. 2: Unclamped Inductive Waveform**




**Fig. 3: Switching Times Test Circuit For Resistive Load**

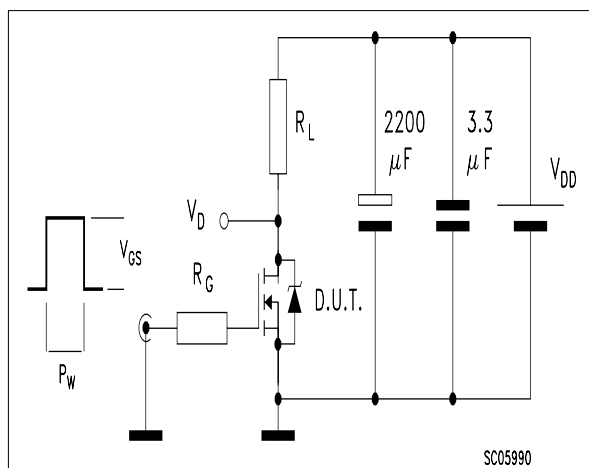

**Fig. 4: Gate Charge test Circuit**

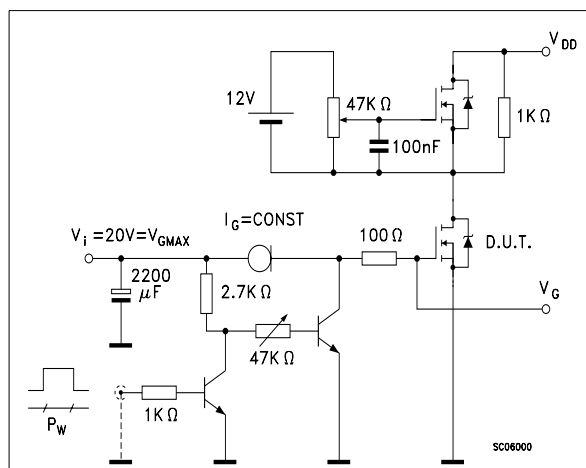


**Fig. 5: Test Circuit For Inductive Load Switching And Diode Recovery Times**

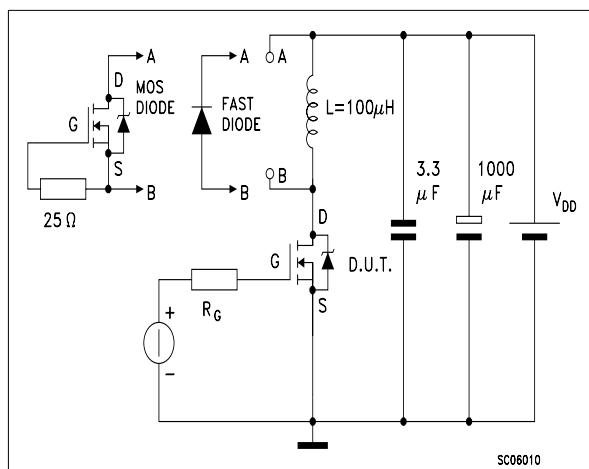

TO-247 MECHANICAL DATA

| DIM. | mm   |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 4.7  |      | 5.3  | 0.185 |       | 0.209 |
| D    | 2.2  |      | 2.6  | 0.087 |       | 0.102 |
| E    | 0.4  |      | 0.8  | 0.016 |       | 0.031 |
| F    | 1    |      | 1.4  | 0.039 |       | 0.055 |
| F3   | 2    |      | 2.4  | 0.079 |       | 0.094 |
| F4   | 3    |      | 3.4  | 0.118 |       | 0.134 |
| G    |      | 10.9 |      |       | 0.429 |       |
| H    | 15.3 |      | 15.9 | 0.602 |       | 0.626 |
| L    | 19.7 |      | 20.3 | 0.776 |       | 0.779 |
| L3   | 14.2 |      | 14.8 | 0.559 |       | 0.582 |
| L4   |      | 34.6 |      |       | 1.362 |       |
| L5   |      | 5.5  |      |       | 0.217 |       |
| M    | 2    |      | 3    | 0.079 |       | 0.118 |

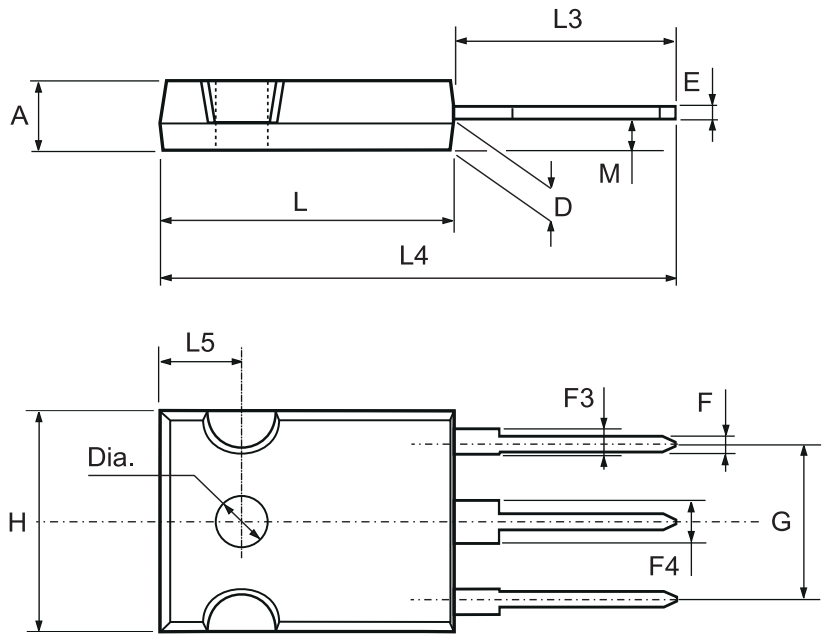

P025P

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>