

MSR860

SWITCHMODE™ Soft Recovery Power Rectifier

Plastic TO-220 Package

Designed for use as free wheeling diodes in variable speed motor control applications and switching power supplies. These state-of-the-art devices have the following features:

- Soft Recovery with Guaranteed Low Reverse Recovery Charge (Q_{RR}) and Peak Reverse Recovery Current (I_{RRM})
- 150°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy meets UL94, $V_0 @ 1/8''$
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction

Mechanical Characteristics:

- Case: Molded Epoxy
- Weight: 1.9 Grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 50 Units per Plastic Tube
- Marking: MSR860

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	600	V
Average Rectified Forward Current (At Rated V_R , $T_C = 125^\circ\text{C}$)	I_O	8.0	A
Peak Repetitive Forward Current (At Rated V_R , Square Wave, 20 kHz, $T_C = 125^\circ\text{C}$)	I_{FRM}	16	A
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I_{FSM}	100	A
Storage/Operating Case Temperature Range	T_{stg} , T_C	-65 to +150	°C
Operating Junction Temperature Range	T_J	-65 to +150	°C

THERMAL CHARACTERISTICS



Thermal Resistance – Junction-to-Case Thermal Resistance – Junction-to-Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.6 72.8	°C/W
---	------------------------------------	-------------	------



ON Semiconductor™


<http://onsemi.com>

**SOFT RECOVERY
POWER RECTIFIER
8.0 AMPERES
600 VOLTS**



TO-220AC
CASE 221B
STYLE 1

MARKING DIAGRAM



MSR860 = Device Code

ORDERING INFORMATION

Device	Package	Shipping
MSR860	TO-220	50 Units/Rail

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Value		Unit
Maximum Instantaneous Forward Voltage (Note 1.) ($I_F = 8.0$ A) <i>Typical</i>	V_F	$T_J = 25^\circ\text{C}$	$T_J = 150^\circ\text{C}$	V
		1.7 1.4	1.3 1.1	
Maximum Instantaneous Reverse Current ($V_R = 600$ V) <i>Typical</i>	I_R	$T_J = 25^\circ\text{C}$	$T_J = 150^\circ\text{C}$	μA
		10 2.0	1000 80	
Maximum Reverse Recovery Time (Note 2.) ($V_R = 400$ V, $I_F = 8.0$ A, $di/dt = 200$ A/ μs) <i>Typical</i>	t_{rr}	$T_J = 25^\circ\text{C}$	$T_J = 125^\circ\text{C}$	ns
		120 95	190 125	
Typical Recovery Softness Factor ($V_R = 400$ V, $I_F = 8.0$ A, $di/dt = 200$ A/ μs)	$s = t_b/t_a$	2.5	3.0	
Maximum Peak Reverse Recovery Current ($V_R = 400$ V, $I_F = 8.0$ A, $di/dt = 200$ A/ μs)	I_{RRM}	5.8	8.3	A
Maximum Reverse Recovery Charge ($V_R = 400$ V, $I_F = 8.0$ A, $di/dt = 200$ A/ μs)	Q_{RR}	350	700	nC

1. Pulse Test: Pulse Width ≤ 380 μs , Duty Cycle $\leq 2\%$
2. T_{RR} measured projecting from 25% of I_{RRM} to zero current

TYPICAL ELECTRICAL CHARACTERISTICS

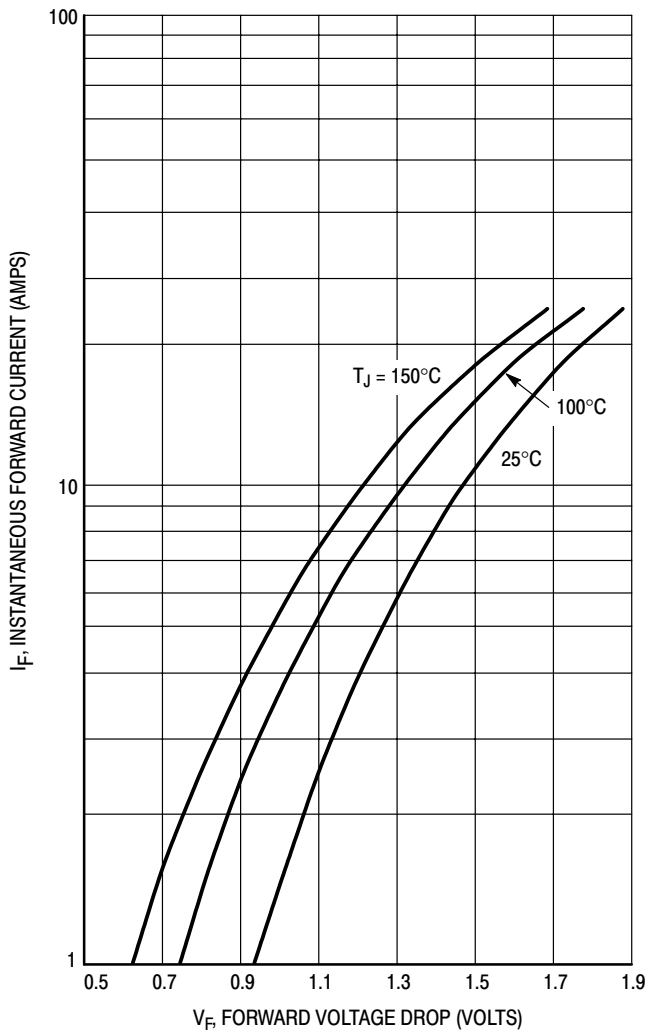


Figure 1. Typical Forward Voltage

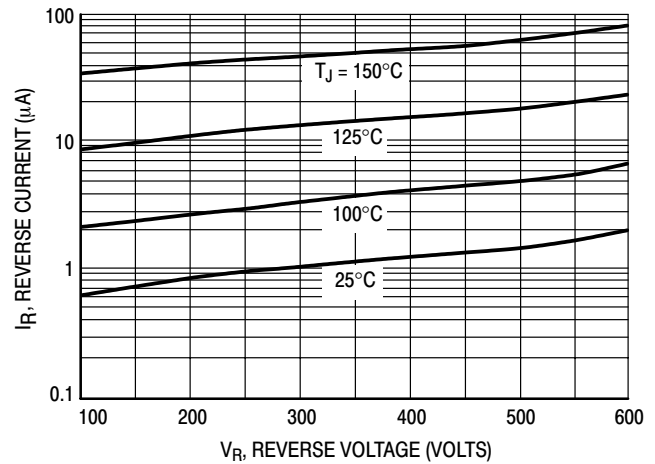


Figure 2. Typical Reverse Current

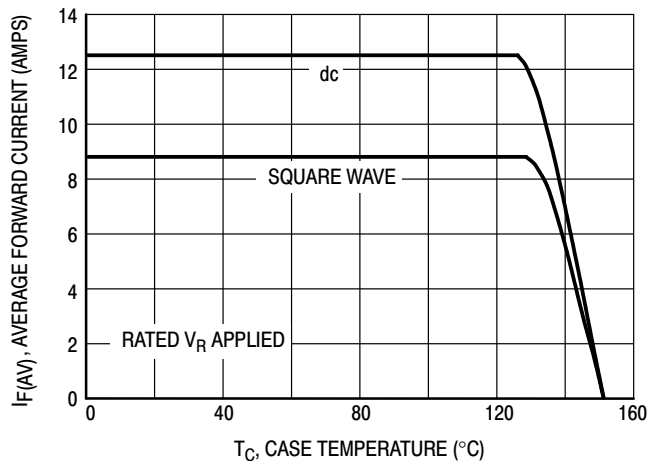


Figure 3. Current Derating, Case

TYPICAL ELECTRICAL CHARACTERISTICS

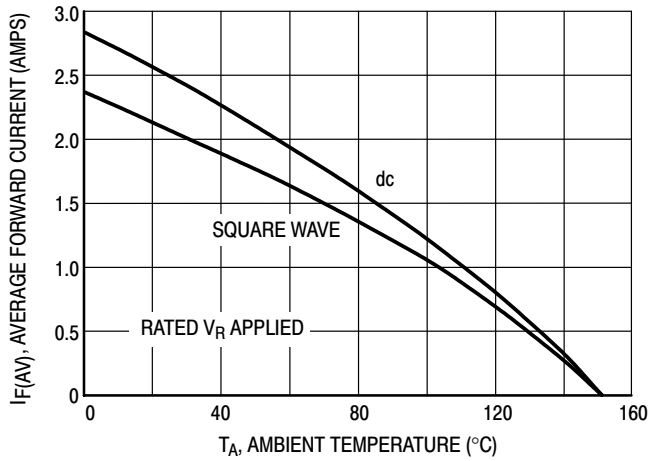


Figure 4. Current Derating, Ambient

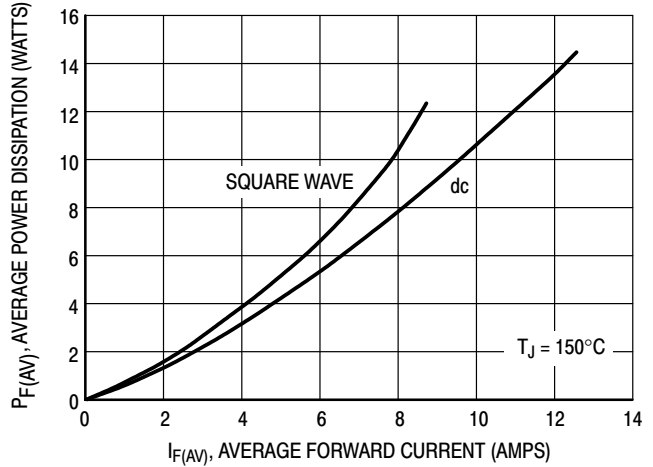


Figure 5. Power Dissipation

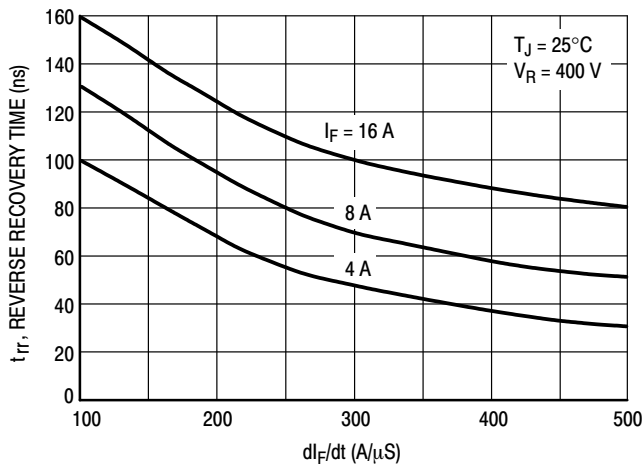


Figure 6. Typical Reverse Recovery Time

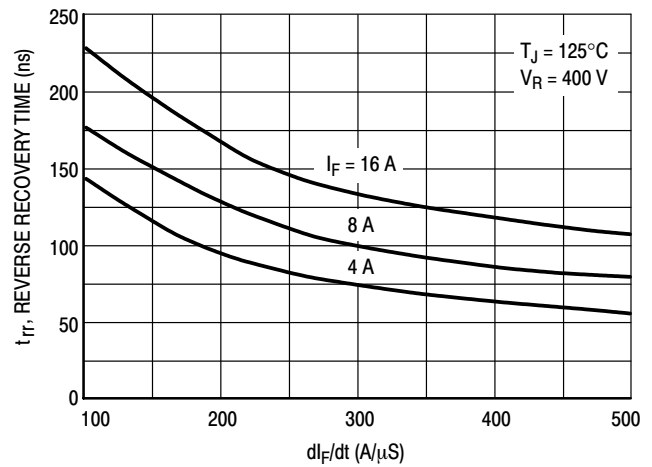


Figure 7. Typical Reverse Recovery Time

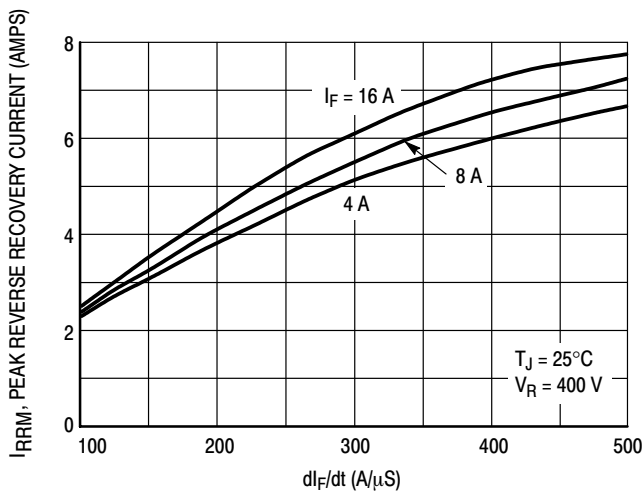


Figure 8. Typical Peak Reverse Recovery Current

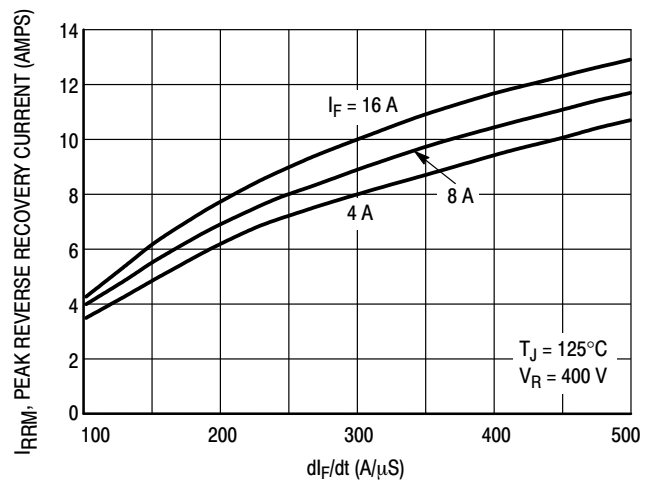


Figure 9. Typical Peak Reverse Recovery Current

TYPICAL ELECTRICAL CHARACTERISTICS

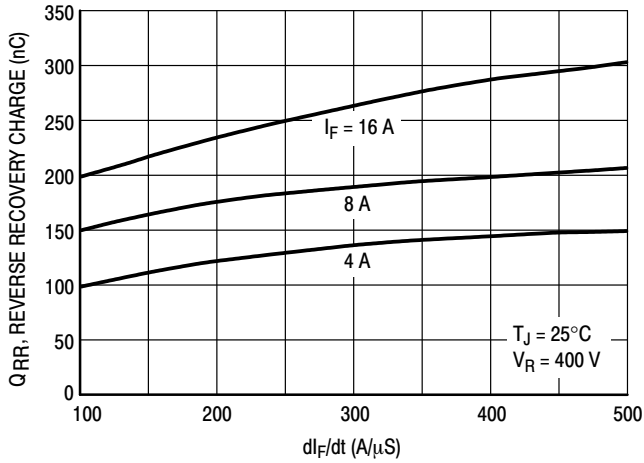


Figure 10. Typical Reverse Recovery Charge

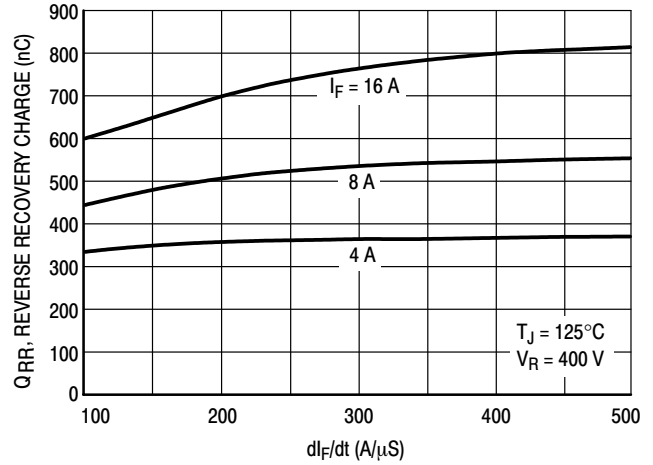


Figure 11. Typical Reverse Recovery Charge

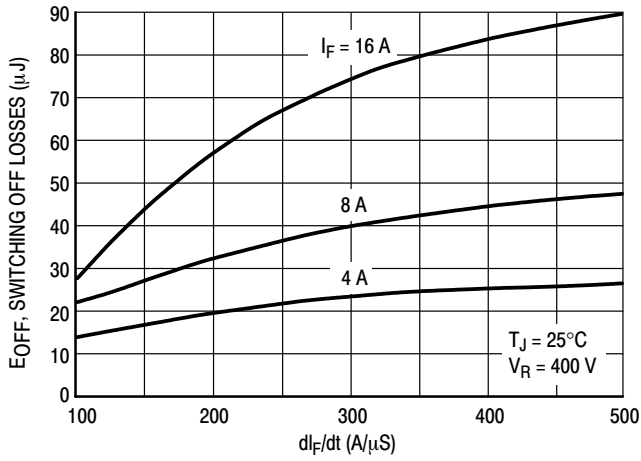


Figure 12. Typical Switching Off Losses

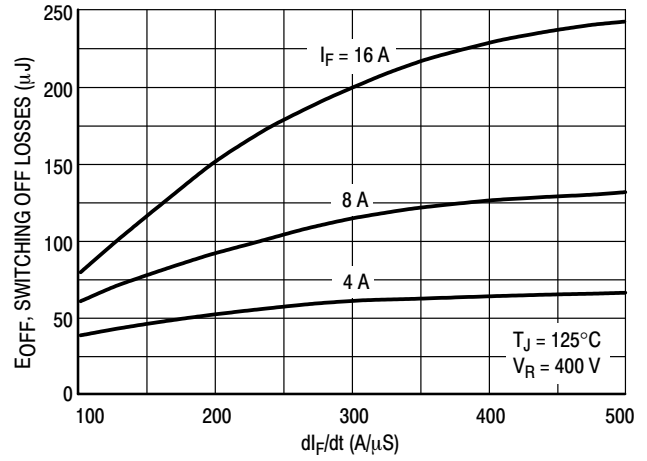


Figure 13. Typical Switching Off Losses


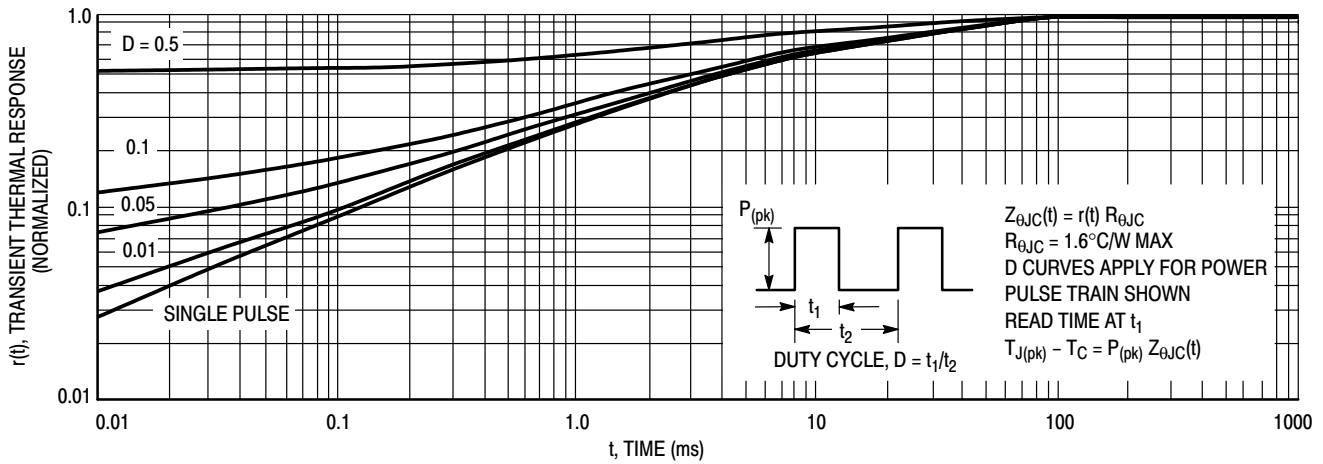


Figure 14. Thermal Response

MSR860

PACKAGE DIMENSIONS

TO-220 TWO-LEAD CASE 221B-04 ISSUE D

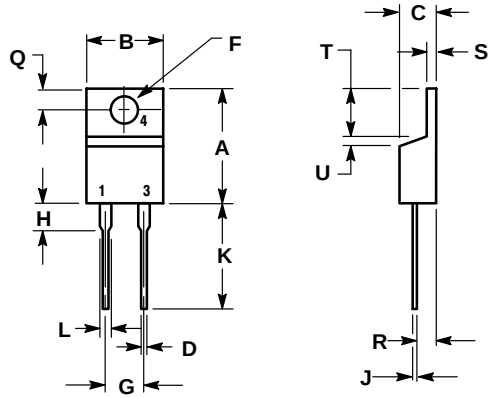

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.595	0.620	15.11	15.75
B	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.82
D	0.025	0.035	0.64	0.89
F	0.142	0.147	3.61	3.73
G	0.190	0.210	4.83	5.33
H	0.110	0.130	2.79	3.30
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.14	1.52
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.14	1.39
T	0.235	0.255	5.97	6.48
U	0.000	0.050	0.000	1.27

STYLE 1:

- PIN 1. CATHODE
2. N/A
3. ANODE
4. CATHODE

Notes

Notes

SWITCHMODE is a trademark of Semiconductor Components Industries, LLC.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com
Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor – European Support

German Phone: (+1) 303-308-7140 (Mon-Fri 2:30pm to 7:00pm CET)
Email: ONlit-german@hibbertco.com
French Phone: (+1) 303-308-7141 (Mon-Fri 2:00pm to 7:00pm CET)
Email: ONlit-french@hibbertco.com
English Phone: (+1) 303-308-7142 (Mon-Fri 12:00pm to 5:00pm GMT)
Email: ONlit@hibbertco.com

EUROPEAN TOLL-FREE ACCESS*: 00-800-4422-3781

*Available from Germany, France, Italy, UK, Ireland

CENTRAL/SOUTH AMERICA:

Spanish Phone: 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)
Email: ONlit-spanish@hibbertco.com
Toll-Free from Mexico: Dial 01-800-288-2872 for Access –
then Dial 866-297-9322

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)
Toll Free from Hong Kong & Singapore:
001-800-4422-3781
Email: ONlit-asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031
Phone: 81-3-5740-2700
Email: r14525@onsemi.com

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.