

- ## DOUBLE HETEROJUNCTION AlGaAs LOW CURRENT RED LED LAMPS



DOUBLE HETEROJUNCTION AlGaAs LOW CURRENT RED LED LAMPS

PHYSICAL CHARACTERISTICS						
SIZE	TYPE	LENS EFFECT	I_v (mcd) MIN.	@ 1mA TYP.	VIEWING ANGLE 2 θ 1/2 DEGREES	PKG.
T-1	HLMP-K150	Red Tinted Diffused	1.2	2	60	A
T-1	HLMP-K155	Clear	2	3	45	A
T-1 $\frac{3}{4}$	HLMP-D150A	Red Tinted Diffused	1.2	3	65	B
T-1 $\frac{3}{4}$	HLMP-D155A	Clear	5	10	24	C

ELECTRO-OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless Otherwise Specified)						
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Forward voltage	V_F		1.6	1.8	V	$I_F = 1\text{ mA}$
Peak wavelength	λ_p		645		nm	$I_F = 1\text{ mA}$
Dominant wavelength	λ_d		637		nm	$I_F = 1\text{ mA}$
Spectral line half width	$\Delta\lambda_{1/2}$		20		nm	$I_F = 1\text{ mA}$
Capacitance	C		30		pF	$V_R = 0, f = 1\text{ MHz}$
Reverse breakdown voltage	V_R	5.0	15.0		V	$I_R = 100\text{ }\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless Otherwise Specified)	
Power dissipation	87 mW
Operating temperature	-20°C to $+100^\circ\text{C}$
Storage temperature	-55°C to $+100^\circ\text{C}$
Lead soldering time at 260°C	5 seconds
Peak forward current (see Note 1)	300 mA
Reverse voltage ($I_R = 100\text{ }\mu\text{A}$)	5V
Average forward current (see Note 2)	20 mA

NOTES	
1. Maximum I_{peak} at $f = 1\text{ kHz}$, $DF = 6.7\%$	
2. Derate linearly as shown in Figure 4.	

TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature)

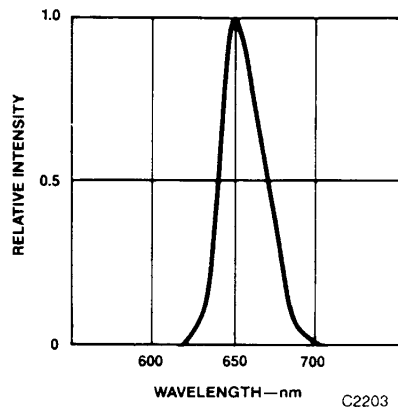


Fig. 1. Relative Intensity
vs. Wavelength

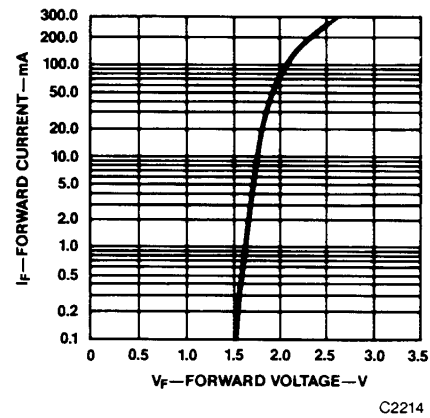


Fig. 2. Forward Current vs.
Forward Voltage

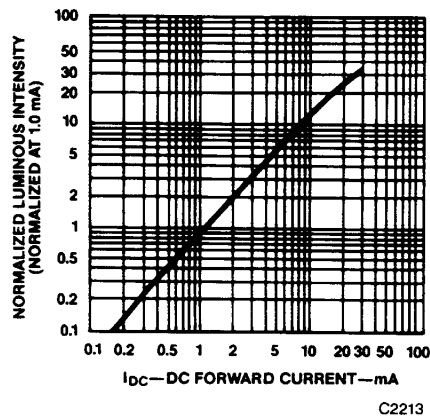


Fig. 3. Relative Luminous Intensity
vs. DC Forward Current

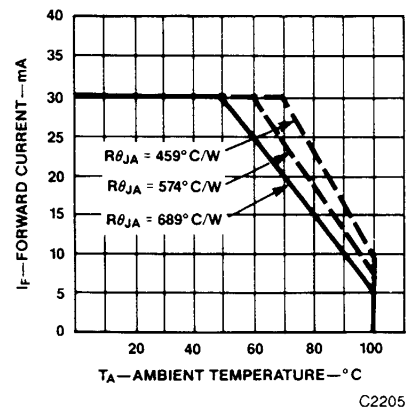


Fig. 4. Maximum Forward DC Current
vs. Ambient Temperature. Derating
Based on $T_J \text{ MAX} = 110^\circ\text{C}$

TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature) (Cont'd)

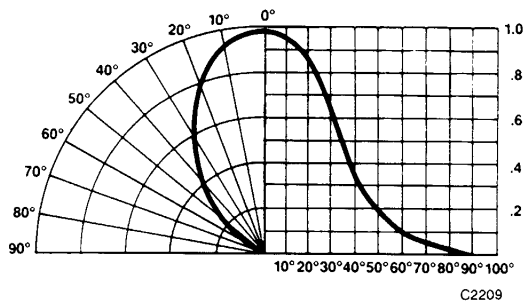


Fig. 5. Relative Luminous Intensity
vs. Angular Displacement.
HLMP-D150A

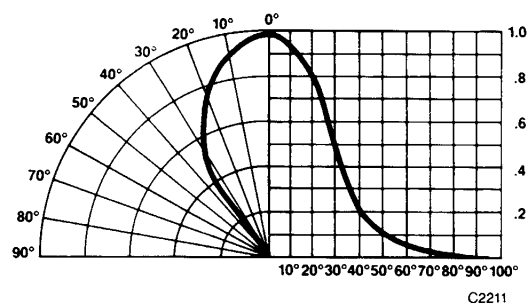


Fig. 6. Relative Luminous Intensity
vs. Angular Displacement.
HLMP-K150

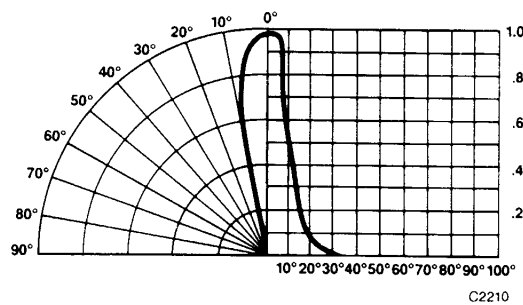


Fig. 7. Relative Luminous Intensity
vs. Angular Displacement.
HLMP-D155A

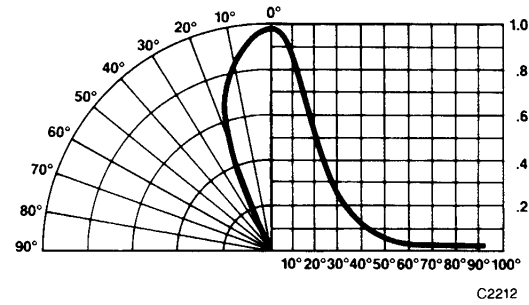


Fig. 8. Relative Luminous Intensity
vs. Angular Displacement.
HLMP-K155