



OPTICALLY COUPLED BILATERAL SWITCH LIGHT ACTIVATED ZERO VOLTAGE CROSSING TRIAC

DESCRIPTION


The MOC303_ Series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a monolithic silicon detector performing the functions of a zero crossing bilateral triac mounted in a standard 6 pin dual-in-line package.

FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})
- Zero Voltage Crossing
- 250V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

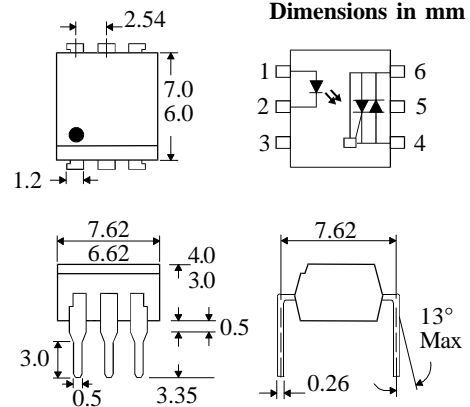

ABSOLUTE MAXIMUM RATINGS
(25 °C unless otherwise noted)

Storage Temperature _____ -40°C - +150°C
 Operating Temperature _____ -40°C - +100°C
 Lead Soldering Temperature _____ 260°C
 (1.6mm from case for 10 seconds)
 Input-to-output Isolation Voltage (Pk) _____ 7500 Vac
 (60 Hz , 1sec. duration)

INPUT DIODE


Forward Current _____ 50mA
 Reverse Voltage _____ 6V
 Power Dissipation _____ 120mW
 (derate linearly 1.41mW/°C above 25°C)

OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage _____ 250V
 RMS Forward Current _____ 100mA
 Forward Current (Peak) _____ 1.2A
 Power Dissipation _____ 150mW
 (derate linearly 1.76mW/°C above 25°C)

POWER DISSIPATION

Total Power Dissipation _____ 250mW
 (derate linearly 2.94mW/°C above 25°C)

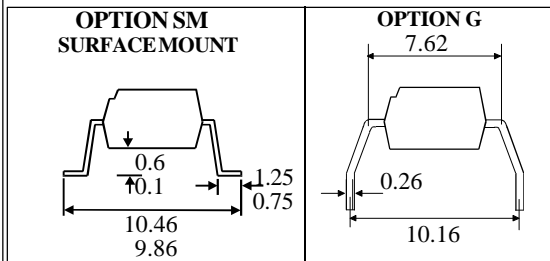

ISOCOM COMPONENTS LTD
 Unit 25B, Park View Road West,
 Park View Industrial Estate, Brenda Road
 Hartlepool, Cleveland, TS25 1YD
 Tel: (01429) 863609 Fax :(01429) 863581

ISOCOM INC
 1024 S. Greenville Ave, Suite 240,
 Allen, TX 75002 USA
 Tel: (214) 495-0755 Fax: (214) 495-0901
 e-mail info@isocom.com
 http://www.isocom.com

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F) Reverse Current (I_R)		1.2	1.5 100	V μA	$I_F = 30\text{mA}$ $V_R = 6\text{V}$
Output	Peak Off-state Current (I_{DRM}) Peak Blocking Voltage (V_{DRM}) On-state Voltage (V_{TM}) Critical rate of rise of off-state Voltage (dv/dt)	250	1.8	300 3.0	nA V V	$V_{\text{DRM}} = 250\text{V}$ (note 1) $I_{\text{DRM}} = 300\text{nA}$ $I_{\text{TM}} = 100\text{mA}$ (peak)
Coupled	Input Current to Trigger (I_{FT}) (note 2) MOC3030 MOC3031 MOC3032 MOC3033 Holding Current, either direction (I_H) Input to Output Isolation Voltage V_{ISO}	5300 7500	100	30 15 10 5	mA mA mA mA μA V_{RMS} V_{PK}	$V_{\text{TM}} = 3\text{V}$ (note 2) See note 3 See note 3
Zero Crossing Charact- -eristic	Inhibit Voltage (V_{IH}) Leakage in Inhibited State (I_S)			35 500	V μA	$I_F = \text{Rated } I_{\text{FT}}$ MT1-MT2 Voltage above which device will not trigger $I_F = \text{Rated } I_{\text{FT}}$ $V_{\text{DRM}} = 250\text{V}$ off-state

Note 1. Test voltage must be applied within dv/dt rating.


Note 2. Guaranteed to trigger at an I_F value less than or equal to max. I_{FT} , recommended I_F lies between Rated I_{FT} and absolute max. I_F .

Note 3. Measured with input leads shorted together and output leads shorted together.


RMS On-state Current vs. Ambient Temperature

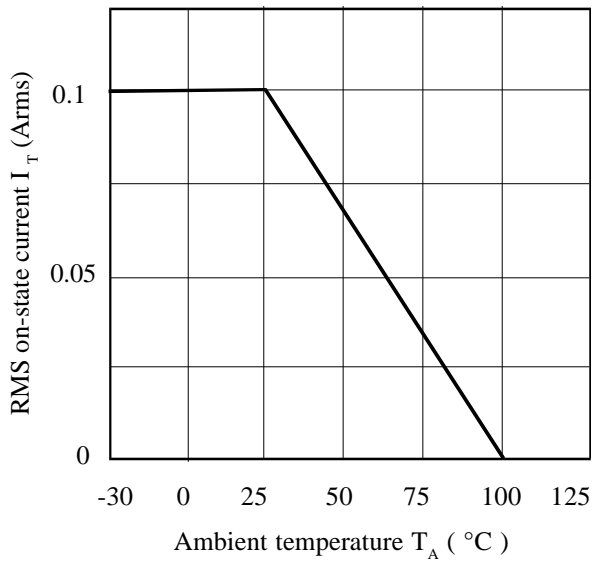


Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature

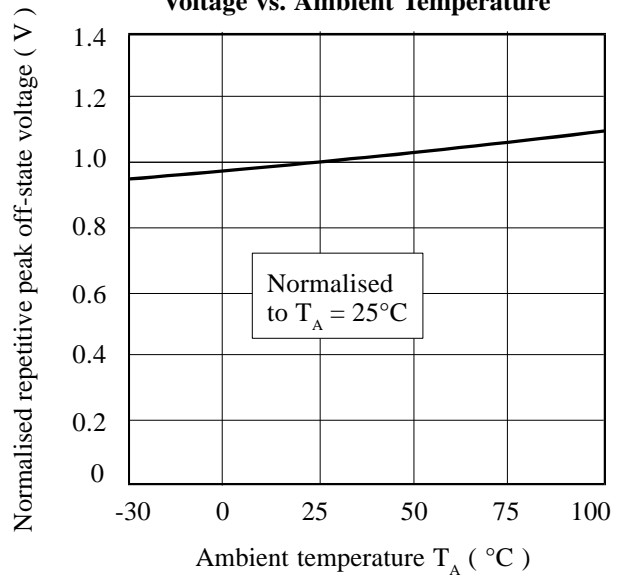


Forward Current vs. Ambient Temperature

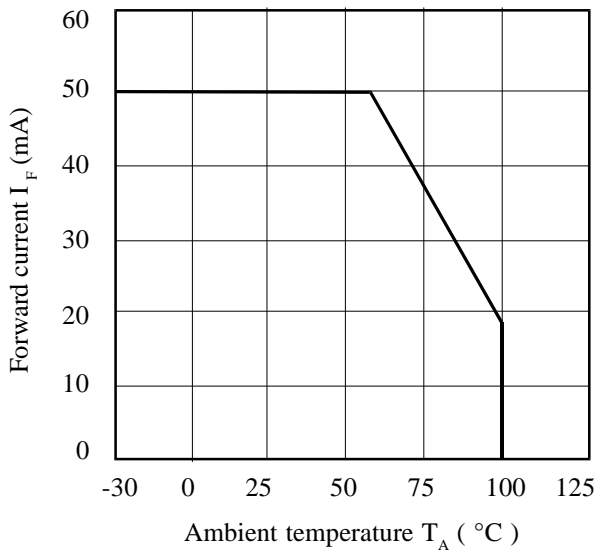

On-state Voltage vs. Ambient Temperature

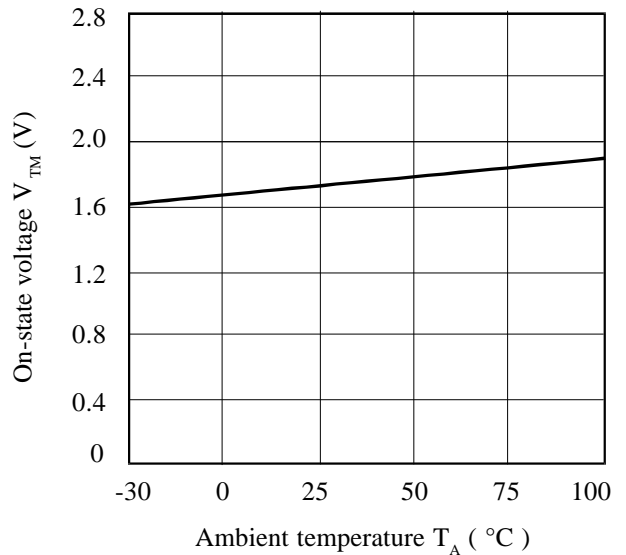

Normalised Input Trigger Current vs. Ambient Temperature

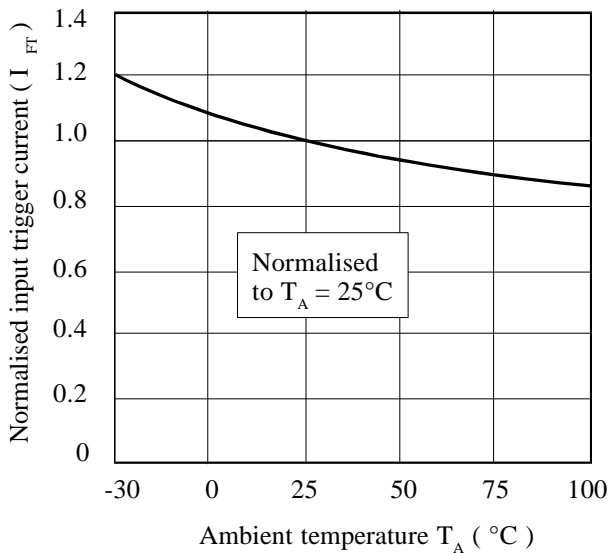

On-state Current vs. On-state Voltage

