

# SPECIFICATION

DEVICE NAME : BIPOLAR TRANSISTOR

TYPE NAME : 2SC4603R

SPEC. No. :

DATE :

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED		<b>Fuji Electric Co.,Ltd.</b>
DRAWN					
CHECKED				DWG.NO.	

Ratings and Characteristics of Fuji Power Transistor

2 S C 4 6 0 3 R

1. Outline Drawing : To-3PF
2. Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Maximum Rating	Unit
Collector-Base Voltage	VCBO	9 0 0	V
Collector-Emitter Voltage	VCEO	8 0 0	
Emitter-Base Voltage	VEBO	1 0	
Collector Current	IC	3	A
Base Current	IB	1	
Collector Dissipation	PC	8 0	W
Operating Temperature	Tj	+ 1 5 0	°C
Storage Temperature	Tstg	- 5 5 ~ + 1 5 0	

3. Electrical Characteristics (Tc=25°C)

Items	Symbol	Conditions	Min	Max	Unit
Collector-Base Voltage	VCBO	ICBO = 1mA	900		V
Collector-Emitter Voltage	VCEO	ICED = 10mA	800		
Emitter-Base Voltage	VEBO	IEBO = 1mA	10		
Collector Cutoff Current	ICBO	VCB = 900V		1.0	mA
Emitter Cutoff Current	IEBO	VEBO = 10V		1.0	
DC Current Gain	hFE	IC=1A, VCE=5V	10		
Collector Saturation Voltage	VCE(sat)	IC = 1A.		1.0	V
Emitter Saturation Voltage	VBE(sat)	IB = 0.2A		1.5	
Switching Time	ton	IC = 2A, Duty ≤ 2% IB1 = +0.4A. IB2 = -0.8A. PW = 20 μs. RL = 150Ω		1.0	μs
	tstg			4.0	
	tf			0.8	


4. Thermal Characteristics


Item	Symbol	Conditions	Min	Max	Unit
Thermal Resistance	Rth(j-c)	Junction to Case		1.55	°C/W


Fuji Electric Co.,Ltd

DWG.NO.

2/11

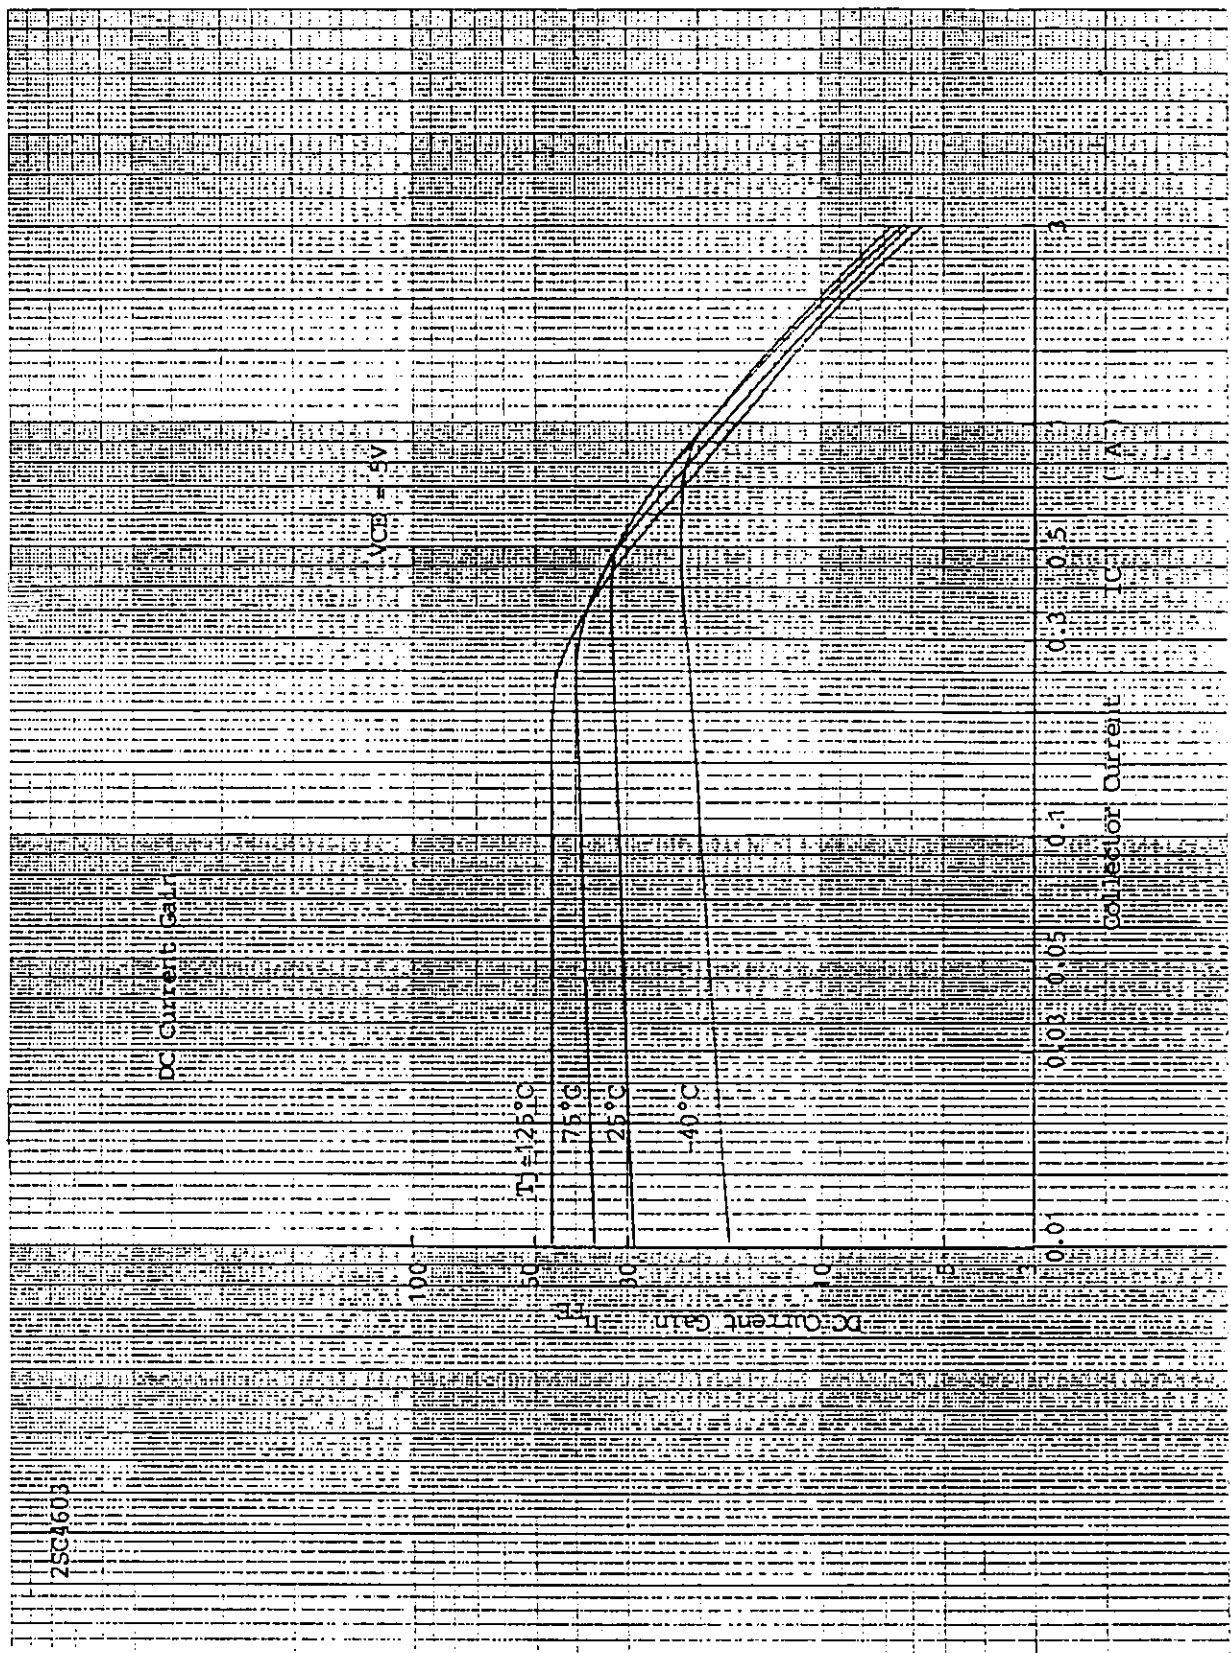

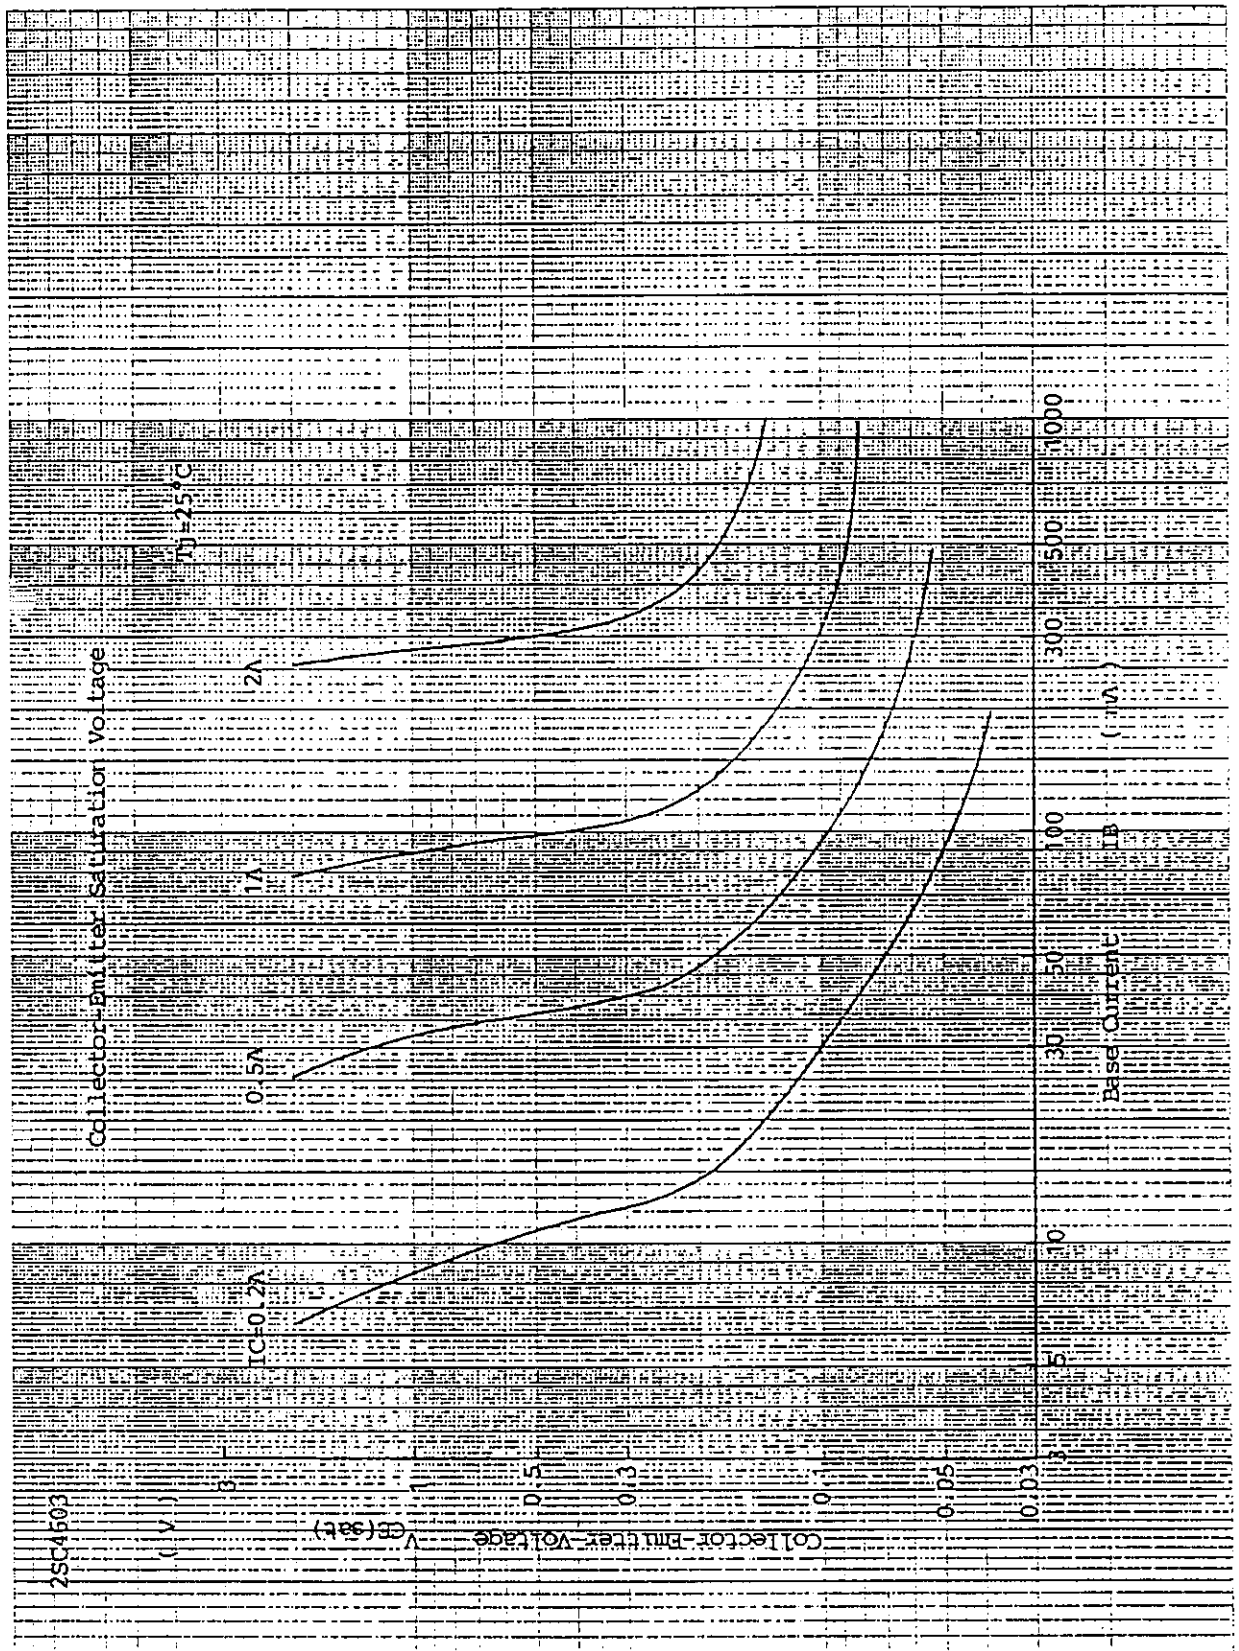

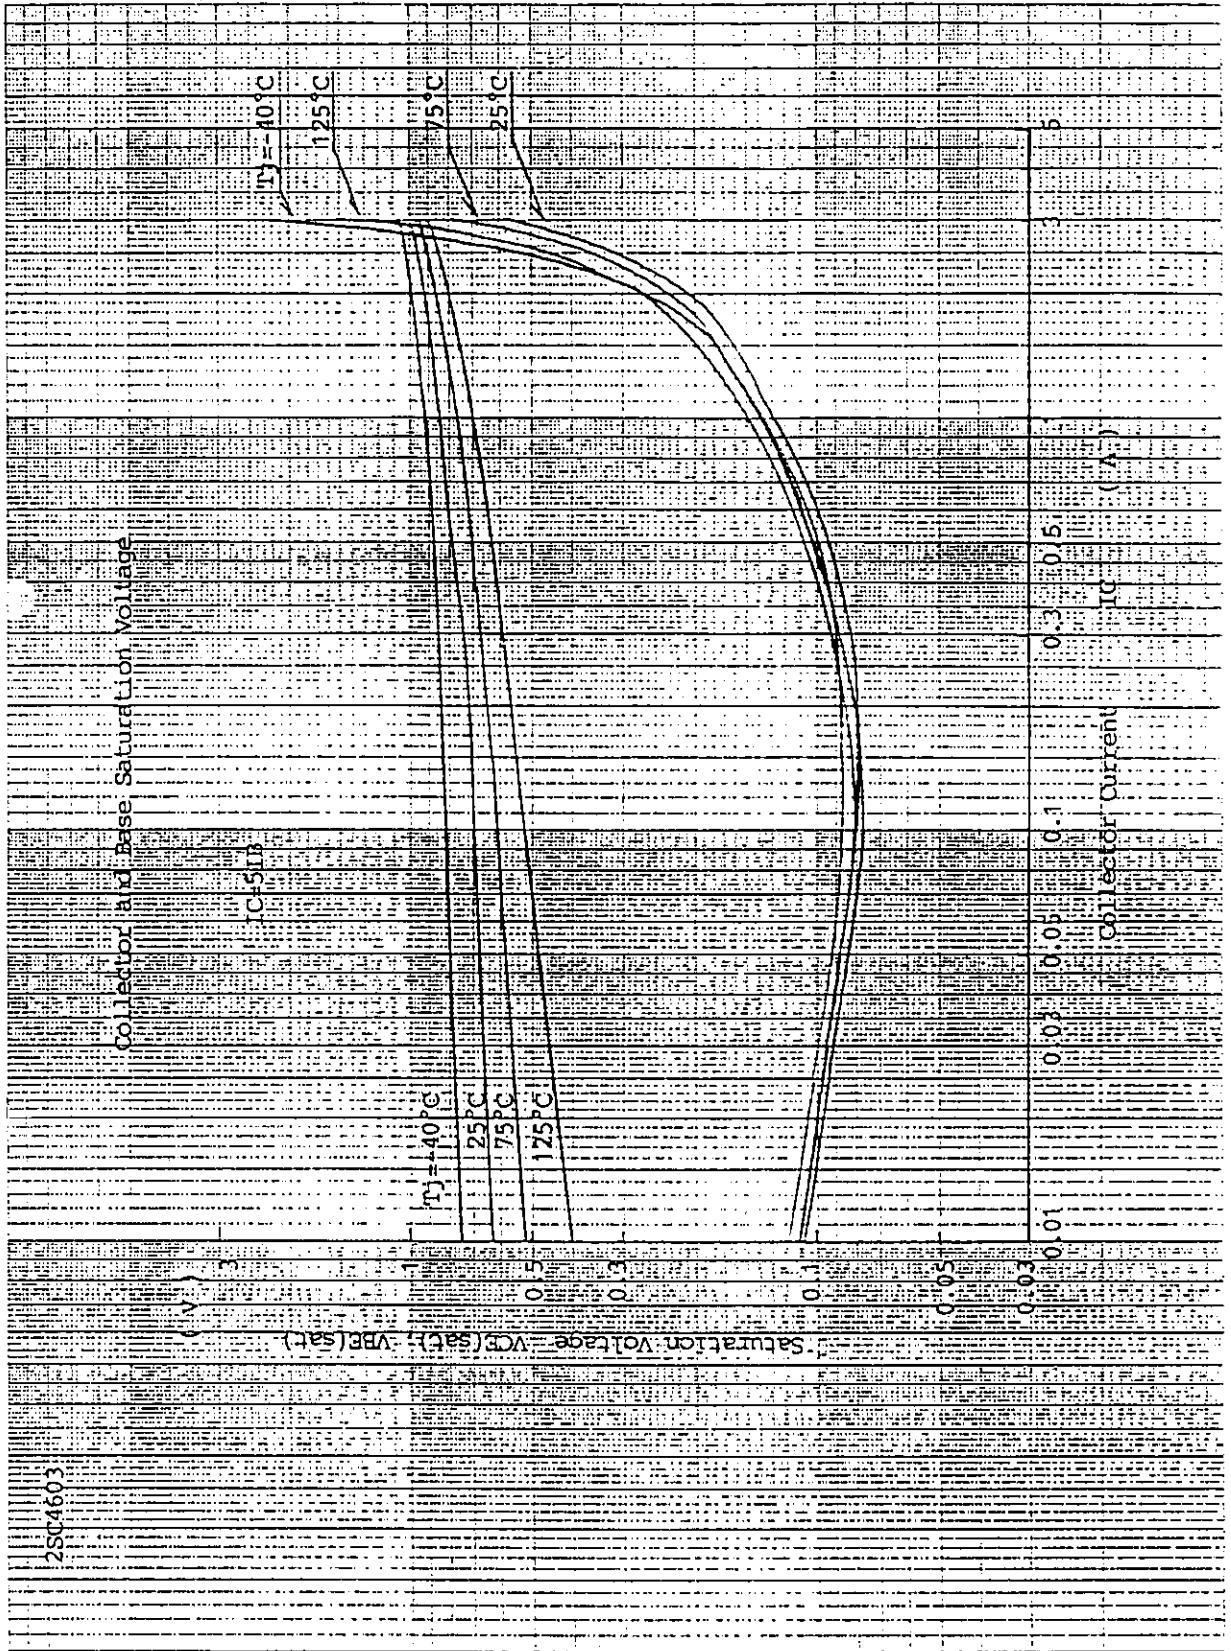

2SC4603

Switching Time

( $\mu$ sec)

10

5  
3  
1

0.5  
0.3

0.1

0.05

0.3

0.5

1

3

5

Collector Current  $I_C$  (A)

$I_C=5IB1=2.5IB2$

$V_{CC}=300V$

$P_{rr}=20\mu sec$

Duty 2%

$T_c=25^\circ C$

$t_{stg}$

$t_{on}$

$t_f$

2SC4603


Reverse Biased Safe Operating Area

(-A-)


Collector Current  $I_C$  (A)

$T_C = 25^\circ C$


$I_B = -2A$

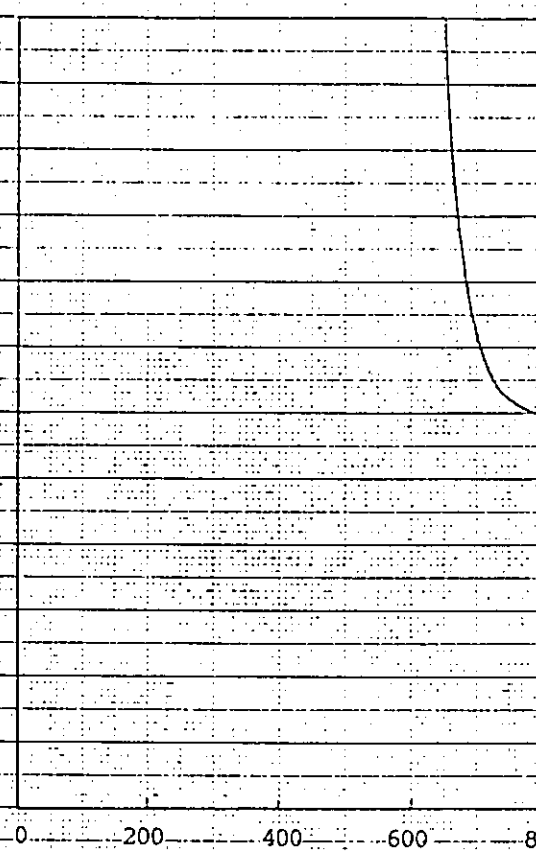

Collector-Emitter Voltage  $V_{CEX}$  (V)

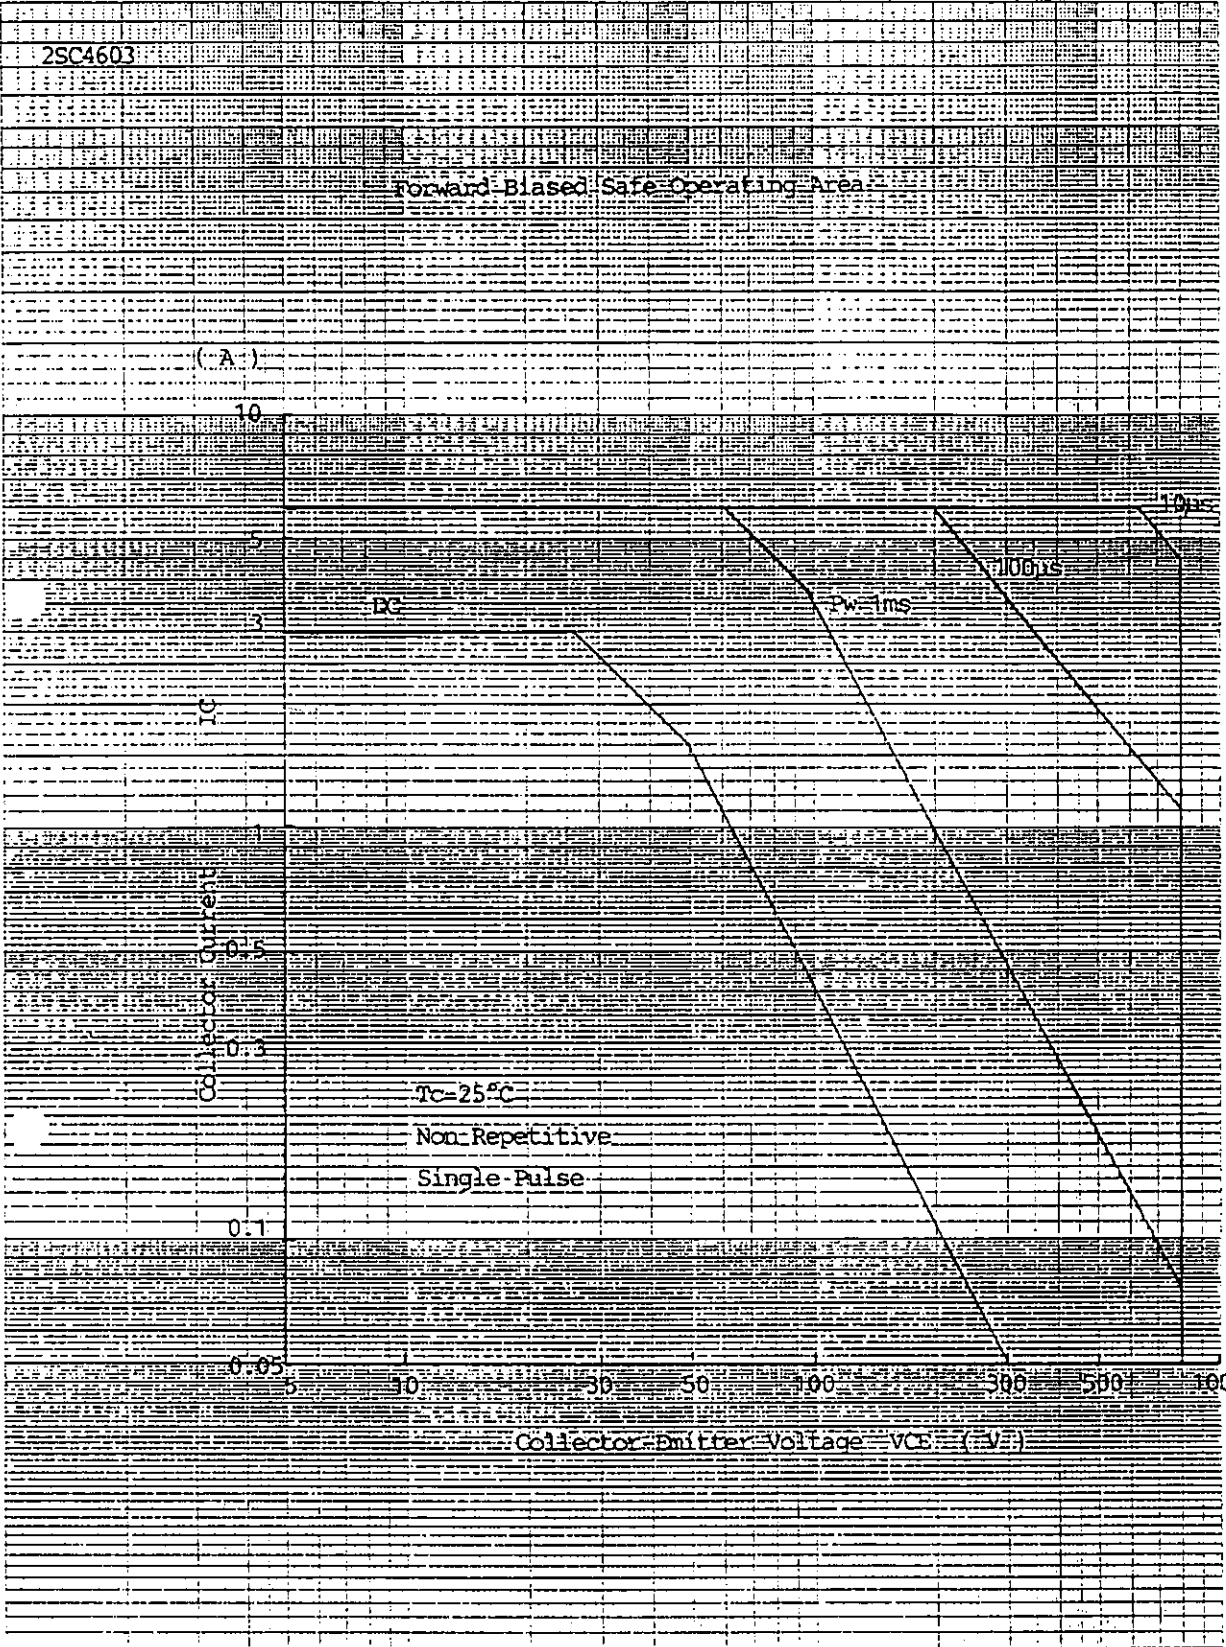



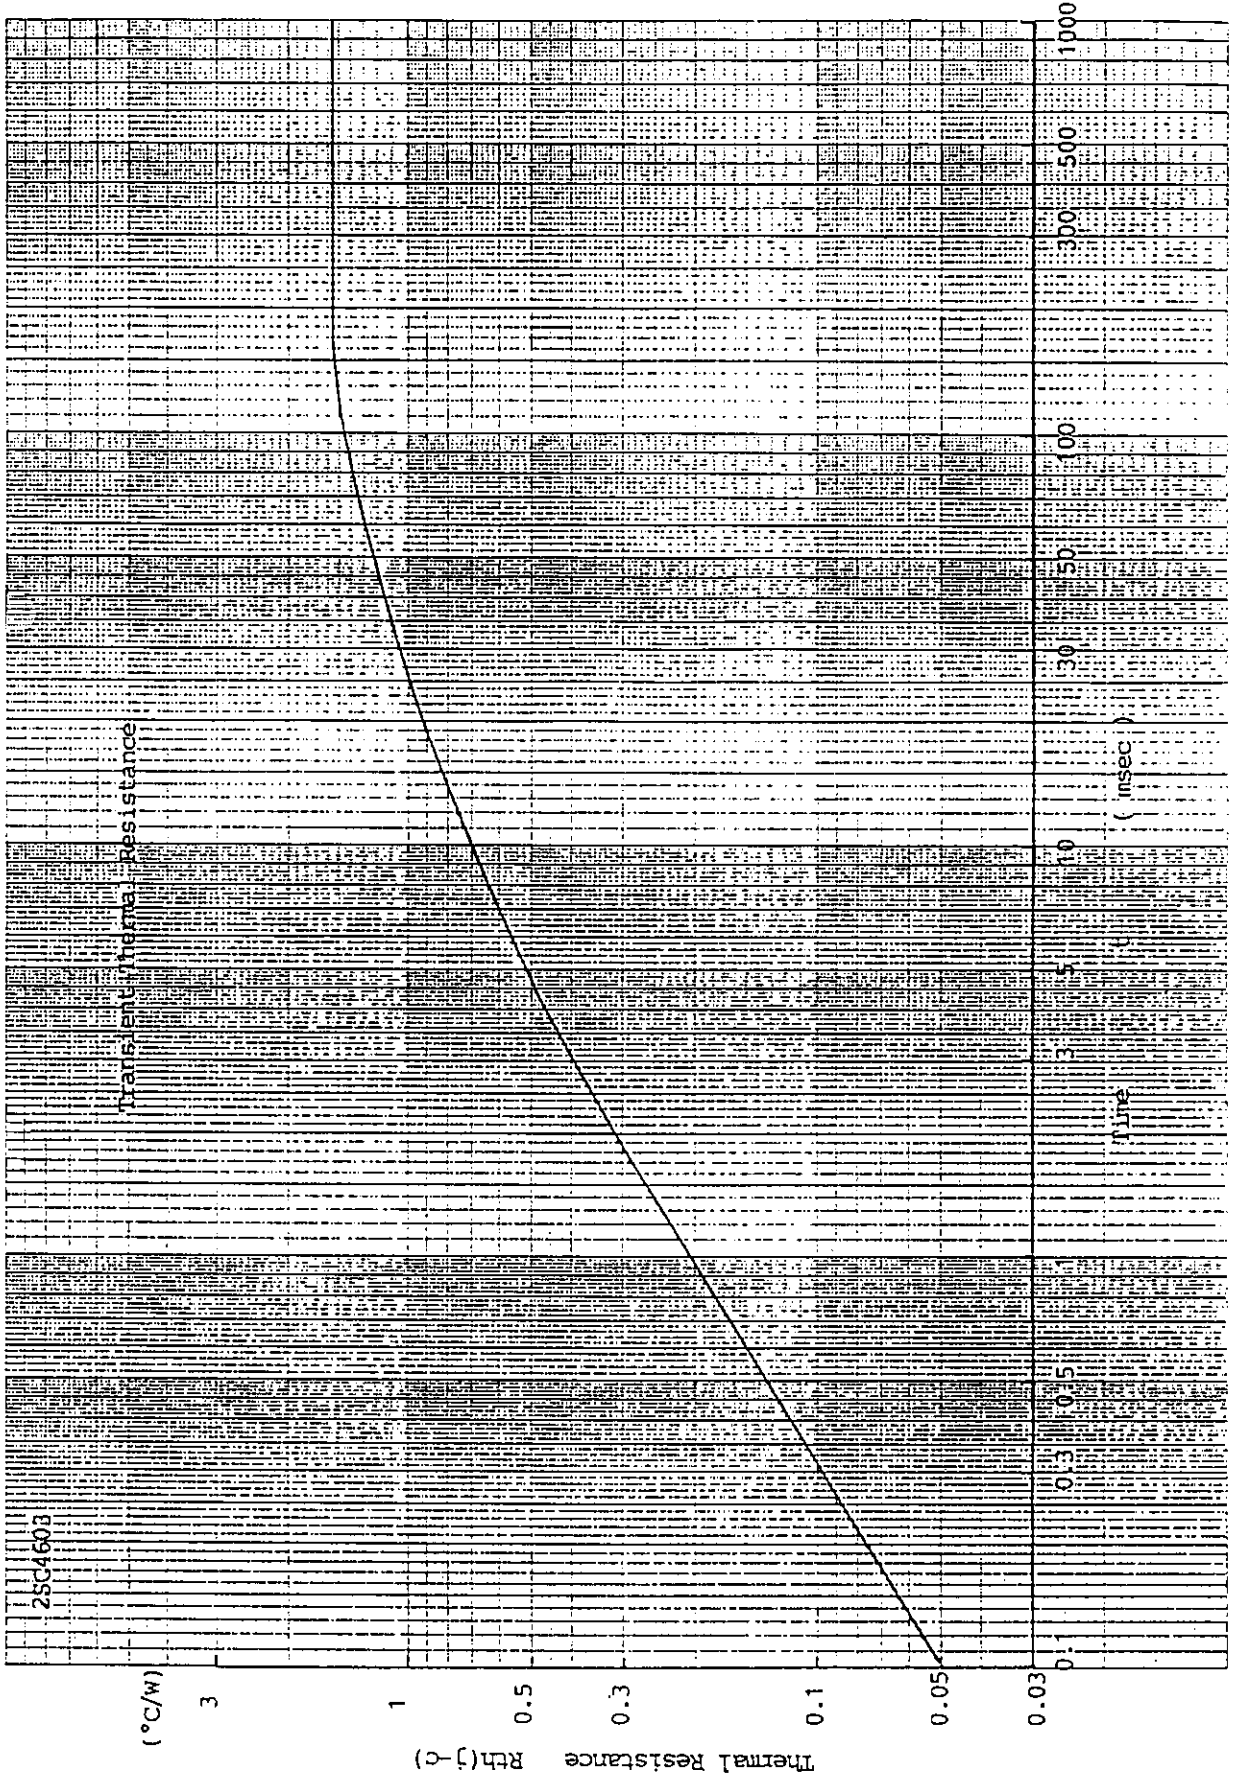

Fuji Electric Co.,Ltd


DWG.NO.

9/11

Y 0257-R-003a



2SC4603

Power Derating Factor

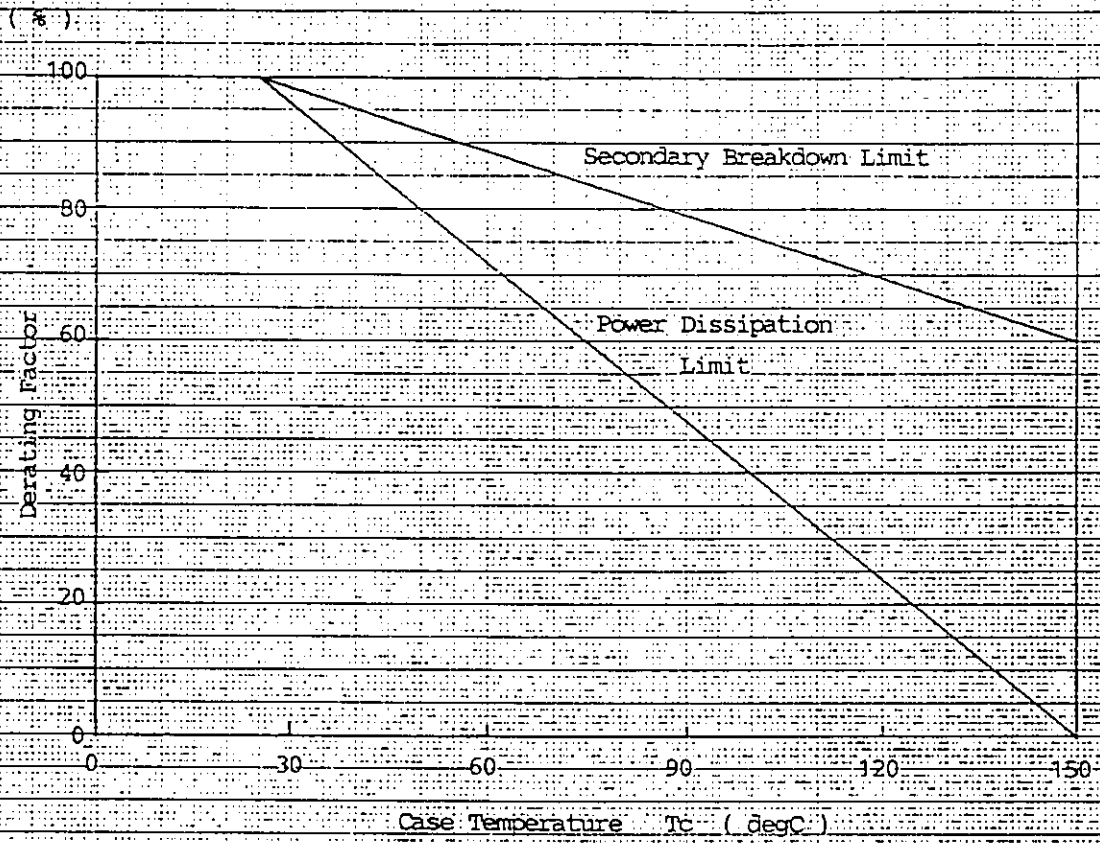

FUJI POWER TRANSISTOR

TYPE : 2SC4603R

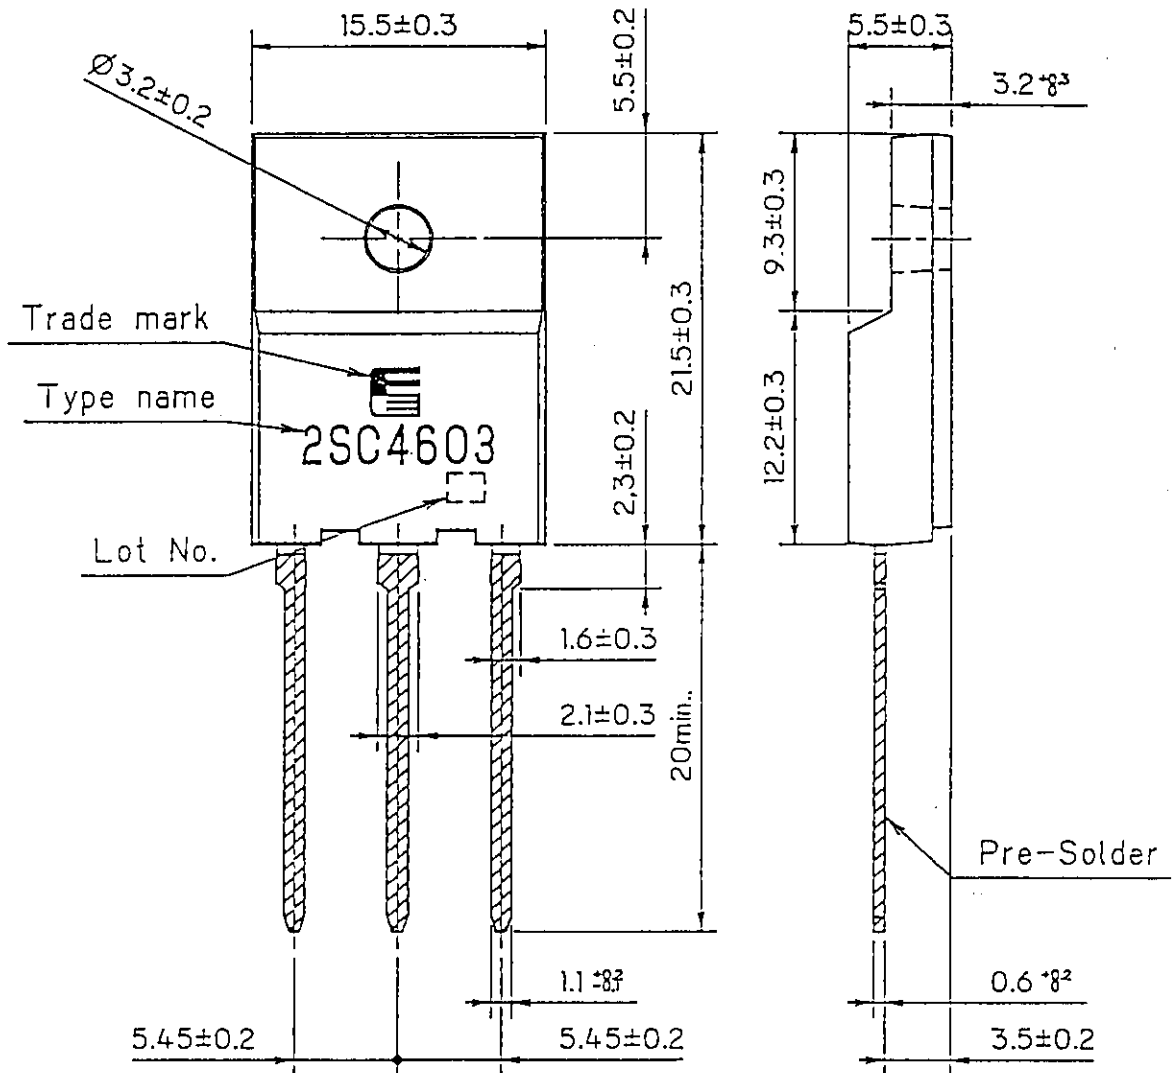

① ② ③

CONNECTION

- ① BASE
- ② COLLECTOR
- ③ EMITTER

For more information, contact:

**Collmer Semiconductor, Inc.**

P.O. Box 702708

Dallas, TX 75370

972-233-1589

972-233-0481 Fax

<http://www.collmer.com>