



BDY53 – BDY54

NPN SILICON TRANSISTORS, DIFFUSED MESA

LF Large Signal Power Amplification
High Current Fast Switching

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V_{CEO}	Collector-Emitter Voltage	BDY53	60	V
		BDY54	120	
V_{CBO}	Collector-Base Voltage	BDY53	100	V
		BDY54	180	
V_{EBO}	Emitter-Base Voltage	BDY53	7	V
		BDY54		
I_C	Collector Current	BDY53	12	A
		BDY54		
I_B	Base Current	BDY53	5	A
		BDY54		
P_{TOT}	Power Dissipation	@ $T_C = 25^\circ$	BDY53 BDY54	60 Watts
T_J	Junction Temperature	BDY53 BDY54	200	$^\circ\text{C}$
T_{Stg}	Storage Temperature	BDY53 BDY54	-65 to +200	$^\circ\text{C}$

BDY53 – BDY54

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)	Min	Typ	Mx	Unit
$V_{CEO(SUS)}$	Collector-Emitter Breakdown Voltage (*)	$I_C=100\text{ mA}, I_B=0$	BDY53 60 BDY54 120	- - -	- -	V
I_{EBO}	Emitter-Base Cutoff Current	$V_{EB}=7\text{ V}$	BDY53 - BDY54 -	- -	3.0	mA
I_{CEX}	Collector-Emitter Cutoff Current	$V_{CE}=100\text{ V}$ $V_{BE}=-1.5\text{ V}$ $T_{CASE}=150^\circ\text{C}$	BDY53 -	-	15	mA
		$V_{CE}=150\text{ V}$ $V_{BE}=-1.5\text{ V}$ $T_{CASE}=150^\circ\text{C}$	BDY54 -	-		
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=4.0\text{ A}, I_B=0.4\text{ A}$	BDY53 -	-	1.1	V
		$I_C=7.0\text{ A}, I_B=1.4\text{ A}$	BDY53 -	-	2.2	
$V_{BE(SAT)}$	Base-Emitter Voltage (*)	$I_C=4.0\text{ A}, I_B=0.4\text{ A}$	BDY53 -	-	2	V
		$I_C=7.0\text{ A}, I_B=1.4\text{ A}$	BDY53 -	-	2.5	
h_{21E}	Static Forward Current transfer ratio (*)	$V_{CE}=1.5\text{ V}, I_C=2\text{ A}$	BDY53 20 BDY54	-	60	V
f_T	Transition Frequency	$V_{CE}=4.0\text{ V}, I_C=0.5\text{ A}, f=10\text{ MHz}$	BDY53 20 BDY54	-	-	MHz
$t_d + t_r$	Turn-on time	$I_C=5\text{ A}, I_B=1\text{ A}$	BDY53 - BDY54	0.3	-	μs
$t_s + t_f$	Turn-off time	$I_C=5\text{ A},$ $I_{B1}=1\text{ A},$ $I_{B2}=-0.5\text{ A}$	BDY53 - BDY54	1.8	-	μs

(*) Pulse Width $\approx 300\text{ }\mu\text{s}$, Duty Cycle $\angle 2.0\%$

BDY53 – BDY54

MECHANICAL DATA CASE TO-3

DIMENSIONS		
	mm	inches
A	25,45	1
B	38,8	1,52
C	30,09	1,184
D	17,11	0,67
E	9,78	0,38
G	11,09	0,43
H	8,33	0,32
L	1,62	0,06
M	19,43	0,76
N	1	0,04
P	4,08	0,16

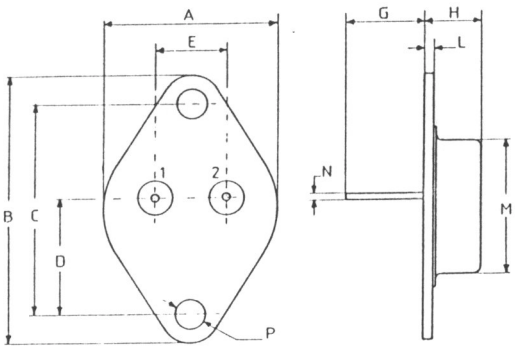

Pin 1 :	Base
Pin 2 :	Collector
Case :	Emitter