


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

FEATURES


- Excellent h_{FE} Linearity
: $h_{FE}(2)=25(\text{Min.})$ at $V_{CE}=6V$, $I_C=400mA$.
- Complementary to KTA2015.

MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	35	V
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	500	mA
Base Current	I_B	50	mA
Collector Power Dissipation	P_C	100	mW
Junction Temperature	T_j	150	℃
Storage Temperature Range	T_{stg}	-55 ~ 150	℃

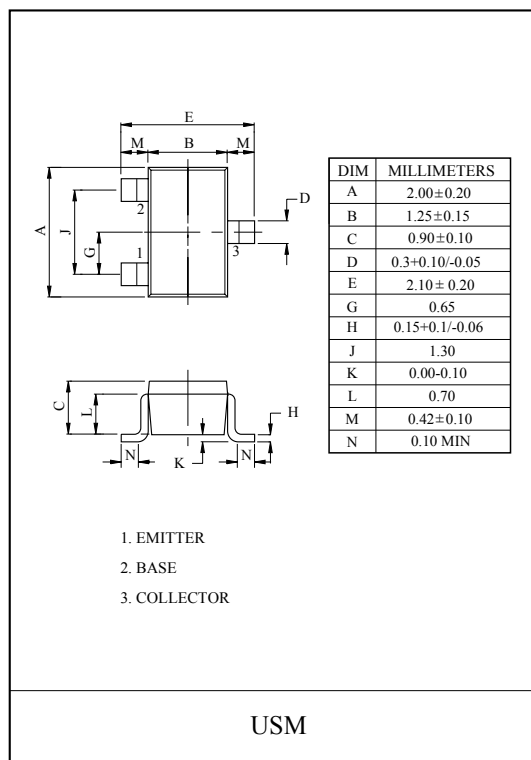

Marking



ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=35V$, $I_E=0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V$, $I_C=0$	-	-	0.1	μA
DC Current Gain (Note)	$h_{FE}(1)$	$V_{CE}=1V$, $I_C=100mA$	70	-	240	
	$h_{FE}(2)$	$V_{CE}=6V$, $I_C=400mA$	25	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA$, $I_B=10mA$	-	0.1	0.25	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=1V$, $I_C=100mA$	-	0.8	1.0	V
Transition Frequency	f_T	$V_{CE}=6V$, $I_C=20mA$	-	300	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=6V$, $I_E=0$, $f=1MHz$	-	7.0	-	pF

(Note) : $h_{FE}(1)$ Classification O(2):70 ~ 140 Y(4):120 ~ 240

$h_{FE}(2)$ Classification O:25Min. Y:40Min.